

WAVEFILTER 6A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Simple radio noise suppression in the cabinet thanks to WAVEFILTER**

The WAVEFILTER series eliminates the need for time-consuming bolting processes of mains filters. The filters are snapped onto TS 35 and connected to the device whose noise is to be suppressed. The two-stage, 22.5 mm wide WAVEFILTER, in 1 A, 3 A, 6 A and 10 A versions, offers high attenuation at all voltage levels from 5 V, 12 V, 24 V, 48 V, 60 V, 120 V up to 250 V.

General ordering data

Version	WAVESERIES, Surge protection, Surge protection, Attenuation at 100 MHz: 40 dB
Order No.	8614800000
Type	WAVEFILTER 6A
GTIN (EAN)	4032248277094
Qty.	1 pc(s).

WAVEFILTER 6A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	110.5 mm	Depth (inches)	4.35 inch
Height	96.5 mm	Height (inches)	3.799 inch
Width	22.5 mm	Width (inches)	0.886 inch
Net weight	112.12 g		

Temperatures

Storage temperature	-25 °C...55 °C	Operating temperature	-20 °C...40 °C
---------------------	----------------	-----------------------	----------------

General data

Protection degree	IP20	Colour	black
-------------------	------	--------	-------

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Attenuation at 0.15 MHz	< 0.5 dB	Attenuation at 1 MHz	18 dB
Attenuation at 10 MHz	45 dB	Attenuation at 100 MHz	40 dB
Capacitance	C _x : 33 nF / C _{and} : 22 nF	Fuse	6.3 A
Inductance L and L1	0.8 mH	Leakage current at U _n	190 µA
Rated current I _N	6 A	Rated voltage (AC)	250 V
Rated voltage (DC)	250 V	Test voltage P-N	1700 V DC
Test voltage P/N-PE	2000 V AC	Voltage type	AC/DC

Connection data

Cross-section	2.5 mm ²	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm ²

Electrical data

Voltage type	AC/DC
--------------	-------

Classifications

ETIM 6.0	EC002623	ETIM 7.0	EC002623
ETIM 8.0	EC002623	ETIM 9.0	EC002623
ETIM 10.0	EC002623	ECLASS 9.0	27-18-28-14
ECLASS 9.1	27-42-02-08	ECLASS 10.0	27-18-28-14
ECLASS 11.0	27-18-28-14	ECLASS 12.0	27-18-28-14
ECLASS 13.0	27-18-28-14	ECLASS 14.0	27-18-28-14
ECLASS 15.0	27-18-28-14		

WAVEFILTER 6A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	No SVHC above 0.1 wt%

Approvals

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
-----------------	---

ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E64388

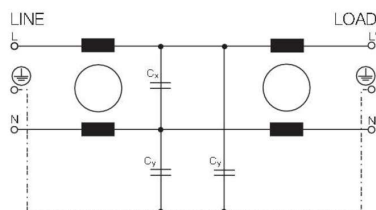
Downloads

Approval/Certificate/Document of Conformity	EU_Konformitätserklärung / EU_Declaration_of_Conformity
Engineering Data	CAD data – STEP
User Documentation	Operating instructions
Catalogues	Catalogues in PDF-format
Brochures	

WAVEFILTER 6A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings**Electric symbol**

Circuit diagram

