

## Deluxe Cord Grips

### Features

- Aluminum Fitting
- Stainless steel mesh is corrosion resistant
- Neoprene bushing is oil and watertight

### Ordering Information

Description	Hub Size	Cable	UPC	Catalog Number
Straight Panzergewinde Male Thread, Liquidtight	PG21	.750"-.875" (1.90-2.22)	783585327839	<b>074PG211248</b>

### Listings

UL Listed  
CSA Certified


### Specifications

Strand	Galvanized Steel
Body	Aluminum

### Performance

#### Environmental

Flammability	UL 94HB (Strand grip), UL 94V-2 (Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C.
Operating Temperatures	-30°F to +240°F (-34°C to +115°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

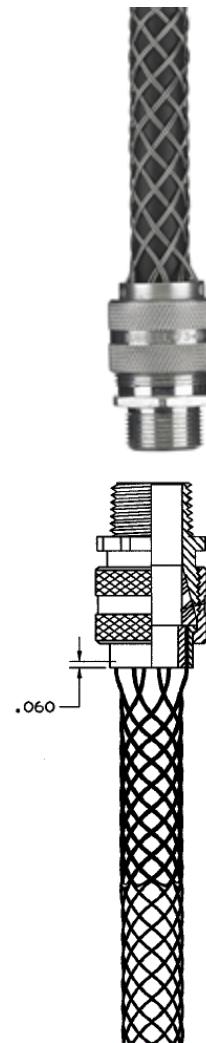

### Related Products

Locknut

LNP21BPK100

### Online Resources

Customer Sales Drawings  
eCatalog  
Installation Instructions