

# Watertight Plug

## Features

- IP67 environmental ratings
- Impact and corrosion resistant insulated non-metallic housing
- Sequential contact engagement to prevent a momentary over-voltage
- External strain relief
- Glandless water ingress protection




## Ordering Information

Heavy Duty Products, IEC Pin and Sleeve		UPC	Catalog Number
Description	Color	783585675664	C460P6WA

## Listings

All constructions are UL Listed & cUL Listed  
File E14633  
UL1686 Standard for Pin & Sleeve Configurations  
VDE, CE

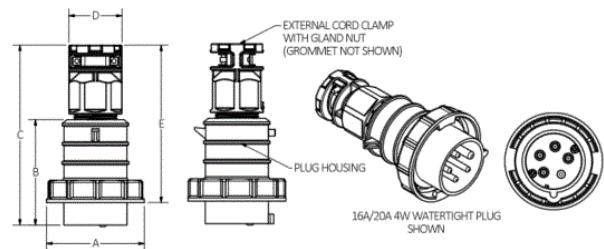

## Specifications

Application	High Ampacity Connections
Connection	Pressure Screw Terminal
Wire Size	#6AWG to #4AWG
Material	PBT
Mounting	Cord Mounted

## Complementary Products

Complementary Products	Closure Cap
------------------------	-------------

## Performance

### Electrical

Dielectric Voltage	Withstand 3000V AC
Max. Working Voltage	600V AC RMS

### Mechanical

Impact Resistance	Per CSA C22.2 No. 182.1 / UL1682
Product Identification	Identification and ratings are marked on device housing
Terminal Identification	Terminals identified in accordance with North American and IEC conventions

### Environmental

Flammability	HB
Ingress Protection	IP67
Moisture Resistance	IEC 60309-1
Temperature Rating	Maximum Continuous: 75° C; Minimum Continuous: -40° C w/o impact, -25° with impact.

## Online Resources

Customer Sales Drawings
eCatalog
Installation Instructions