

**Twist-Lock® Devices**  
**50A, 3 Phase 250V AC, 3 Pole, 4 Wire Grounding**

**HUBBELL**

**Insulgrip® Connector with conduit adapter**

**Features**

- Capable of accepting metallic or non metallic conduit fittings
- Box terminal with hex socket threaded slug, permits high clamping pressure on conductors without damaging strands
- Thermoplastic polyester interior provides heat resistance and impact strength
- Oversized contacts minimize operating temperature



**Ordering Information**

Description	NPT Size	UPC Number	Catalog Number
Nylon cover, thermoplastic interior	1/2"	78358558045	CS8364CA05



**Listings**

Listed to UL 498

Certified to CSA C22.2 No.42

**Specifications**

Housing	Nylon
Terminal Retainer	Thermoplastic polyester
Contacts	Brass
Terminal Screws	Stainless Steel

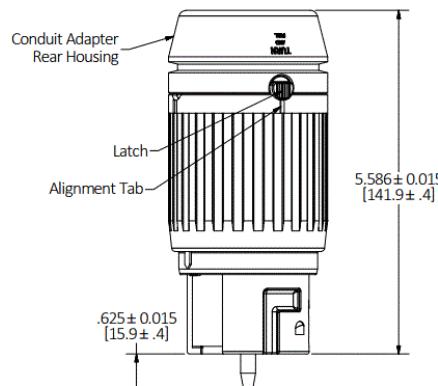

**Performance**

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric voltage	2,000V minimum
<b>Environmental</b>	
Flammability	HB or better
Operating Temperatures	Maximum Continuous 75C Minimum -40C (w/o impact)
<b>Mechanical</b>	
Terminal Accommodation	#8 - #4 AWG stranded copper wire only

**Complementary Products**

Conduit Fitting	H0501 (1/2")
-----------------	--------------

**Online Resources**

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.