
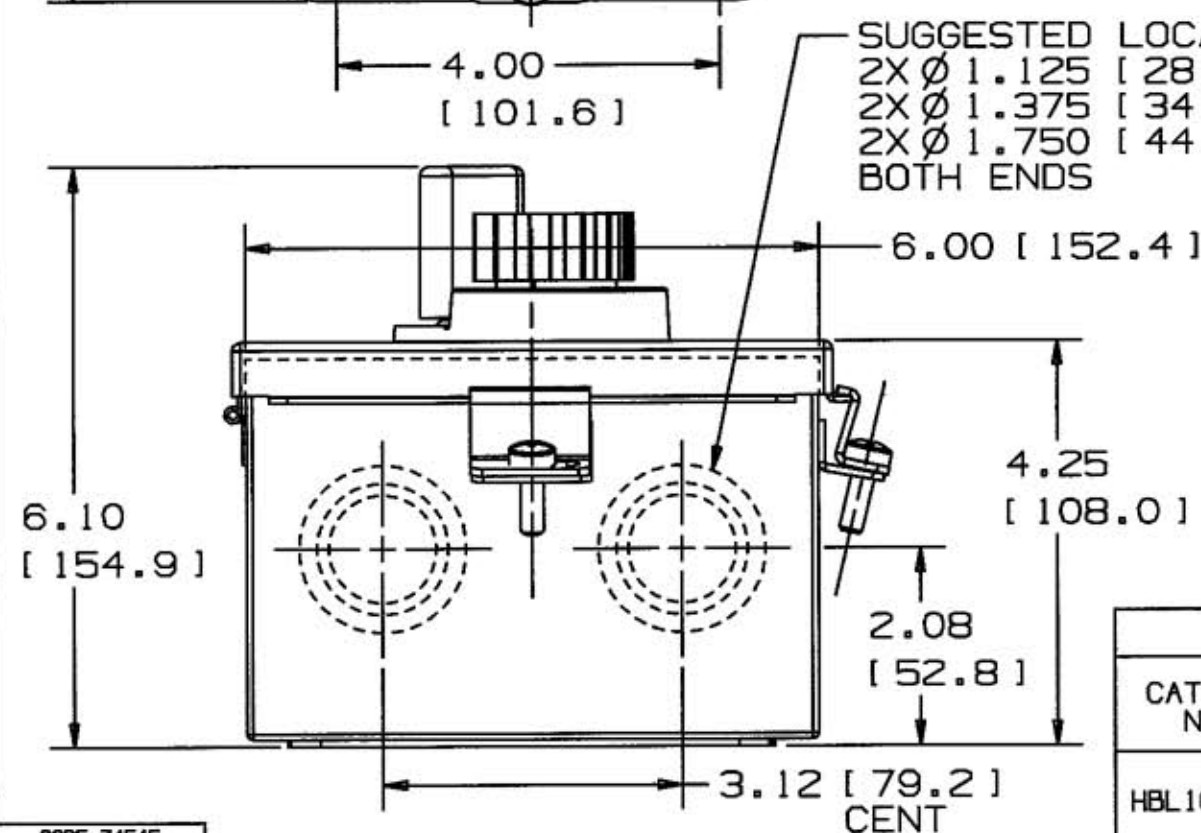
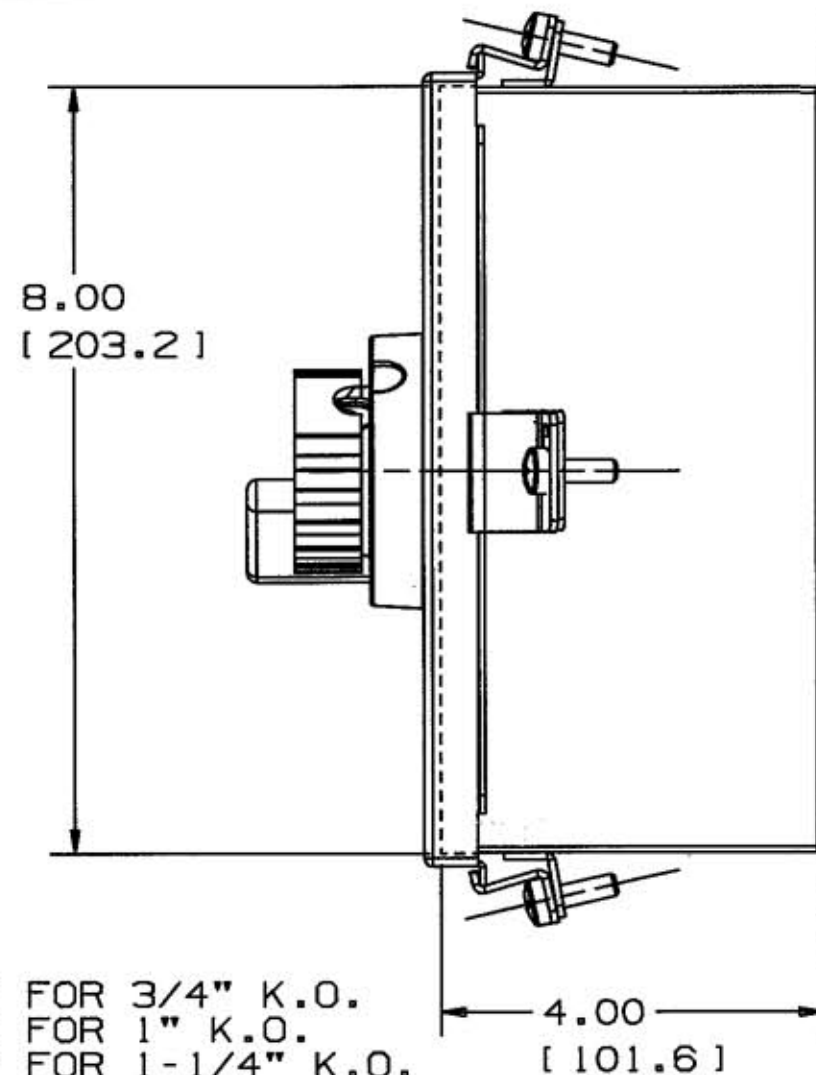


M-9337

1

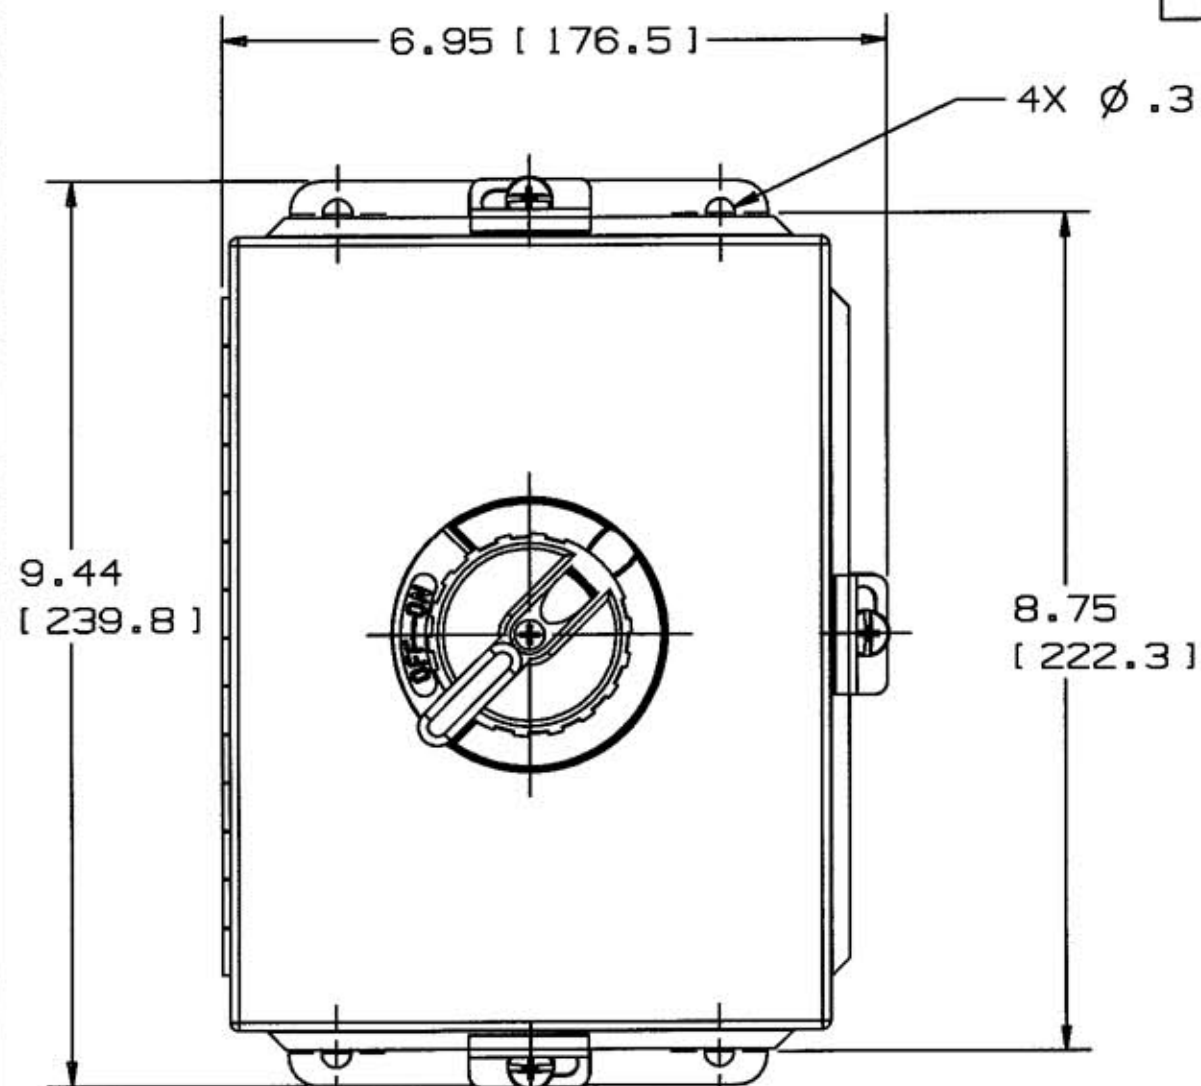

SUGGESTED LOCATION.
 2X Ø 1.125 [28.6] HOLE FOR 3/4" K.O.
 2X Ø 1.375 [34.9] HOLE FOR 1" K.O.
 2X Ø 1.750 [44.5] HOLE FOR 1-1/4" K.O.
 BOTH ENDS

DIMENSIONS IN INCHES [MM]

CATALOG NO.	PHASE	GENERAL RATING	H.P. RATINGS				TERM. MAX. CAP. & WIRE INFO.	INSUL. STRIP IN. [MM]	TERMINAL TORQUE LB. IN. [Nm]
			120V AC	240V AC	480V AC	600V AC			
HBL16S63D	3Ø	60A 600VAC		10	25	30	#4 AWG 60° C MIN.	5/8 [16]	25 [2.8]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
ENCLOSURE	STAINLESS STL	POLISHED
ENCLOSURE HANDLE	STAINLESS STL	
ENCL. ON-OFF RING	THERMOPLASTIC	RED
SW MTG. BRACKET	STEEL	GALVANIZED
SW BASE & COVER	THERMOSET	BLACK
SW BRIDGE	STEEL	GALVANIZED
SW TERMINALS	COPPER ALLOY	
SW TERMINAL SCREWS	STEEL	ZINC
ENCLOSURE MTG. PLATE	STEEL	PAINTED WHITE
NEUTRAL BUSS		

DIMENSION SHEET FOR CAT. NO.

SEE CHART

REPAIRABLE ☐NON-REPAIRABLE ☐

B

M-9337

1

2	H.P. RATINGS 25 WAS 15 & 30 WAS 20. DCN12037 PAC	SM	10-6-04
1	DCN11626 INITIAL RELEASE		4-14-04
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
 PRODUCT SHOWN ON THIS DRAWING ARE
 SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 60A ROT DISCONNECT
 IN 4X SS ENCLOSURE
 HUBBELL CUST. DRAWING

TOLERANCES UNLESS
 OTHERWISE SPECIFIED
 FRACTIONS ±1/64
 DECIMALS ±.005
 ANGLES ±2°

WIRING DEVICE-KELLEMS
 HUBBELL INCORPORATED
 BRIDGEPORT, CT

DR. BY PAC	APP. BY
TR. BY	SCALE NONE
CHK'D BY	DATE 4-1-04