

## Twist-Lock® Devices

30A, 250V, 2 Pole, 3 Wire Grounding

Spring Termination Single Flush Receptacle

# HUBBELL

### Features

- Faster termination time
- No need for screwdriver and torque wrench
- Spring Termination eliminates strand relaxation
- High-impact, abuse-resistant nylon face
- Face color coding by voltage facilitates locating and mating of proper devices



### Ordering Information

Description	Device Color	UPC	Catalog Number
Nylon face, back wire.	Black	783585569574	HBL2620ST


### Listings

Listed to UL 498

Certified to CSA C22.2 No.42

### Specifications

Face	Nylon
Base	Nylon
Contacts	Brass
Spring	Steel
Mounting Strap	Brass

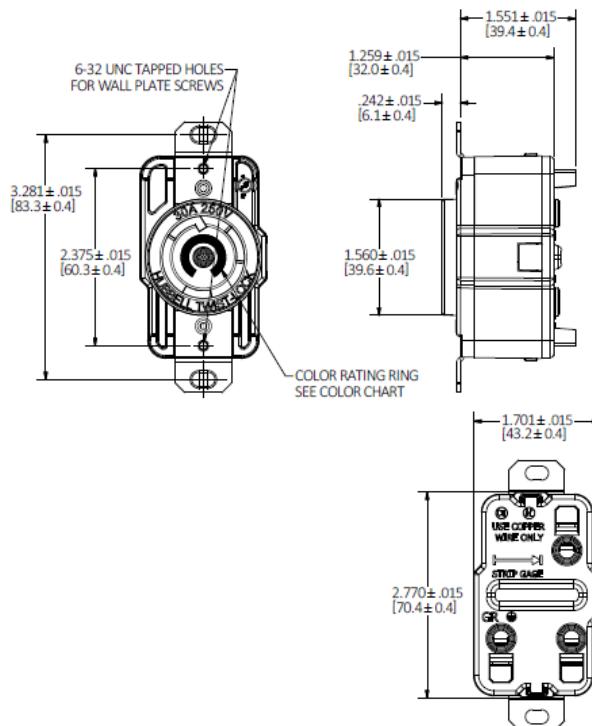

### Performance

#### Electrical

Current Interrupting Certified for current interrupting at full rated current

Dielectric Voltage Withstands 2,000V minimum

#### Mechanical

Terminal Accommodation 14 AWG - 10 AWG solid, 14 AWG - 8 AWG

stranded (including compact stranded)

Terminal Identification Terminals identified in accordance with UL 498

#### Environmental

Flammability V2 or better per UL94/CSA 22.2 No.0.17

Moisture Resistance IP20 Suitability

Operating Temperatures Maximum Continuous 75°C; Minimum -40°C (w/o impact)

### Complementary Products

Plug	HBL2621
Wallplate or Weatherproof Cover	1.60" Opening
Switched Enclosure	SETL3

### Online Resources

Customer Use Drawing

eCatalog

Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.