

Male Plug**Features**

- Insulgrip® Style Housing for Superior Gripping
- Non-Conductive Retaining Screw locks contacts in place
- Large Raised Alignment Arrow aids in the mating of devices

Ordering Information

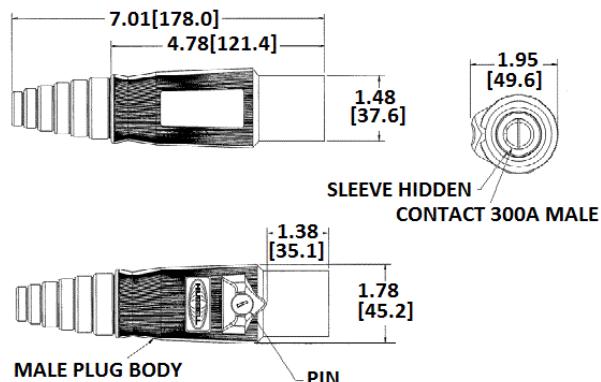
Description	Device Color	UPC Number	Catalog Number
300A, thermoplastic elastomer, cable size #6 - 2/0 AWG	Yellow	783585112152	HBL300MY

**Listings**

UL and cUL Listed
 UL Enclosure Types 3R, 4X, 12
 National Electric Code (NEC), ANSI/NFPA 70

Specifications

Base Compound	Thermoplastic Elastomer
Contact Material	Brass
Retaining Screw Material	Nylon

**Performance**

Electrical	400A Maximum 600V AC/DC Maximum
Mechanical	Ratings are a permanent part of device #6 to 2/0 AWG
Environmental	HB per UL94 or CSA 22.2. 0.17
Flammability	

Online Resources

Customer Sales Drawings
 eCatalog
 Installation Instructions