
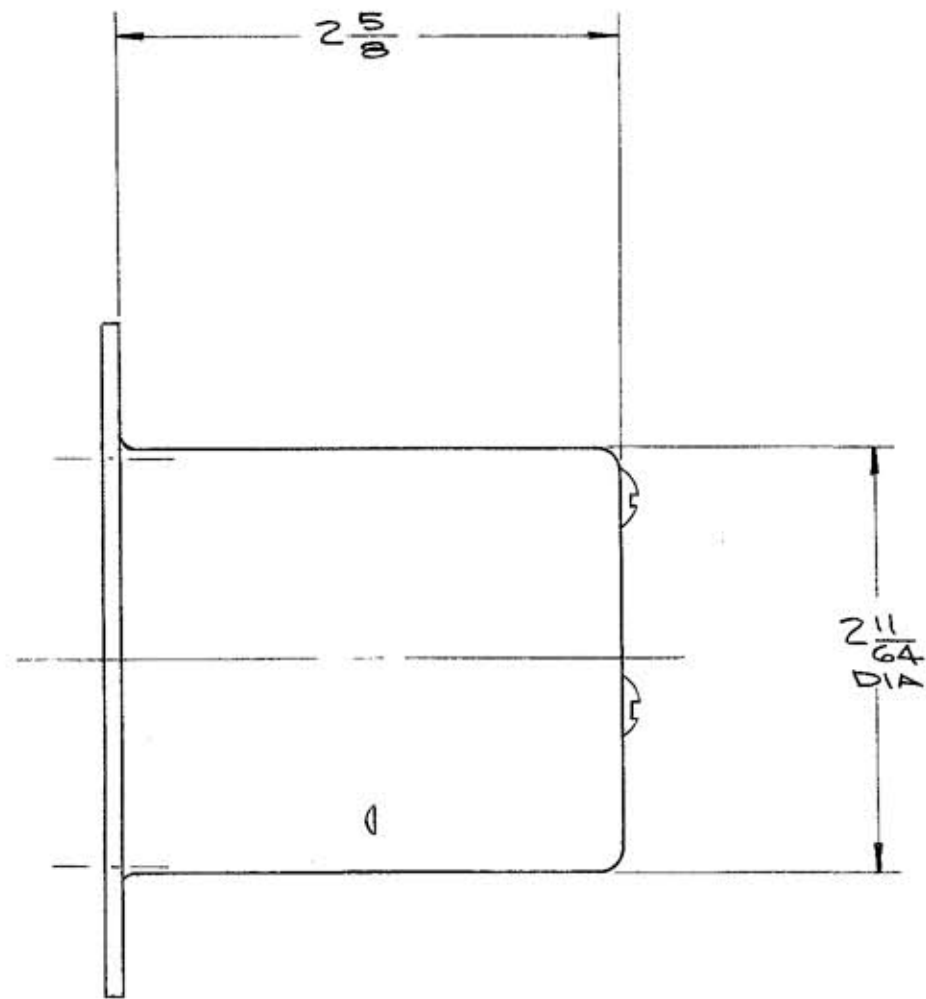


M-4090

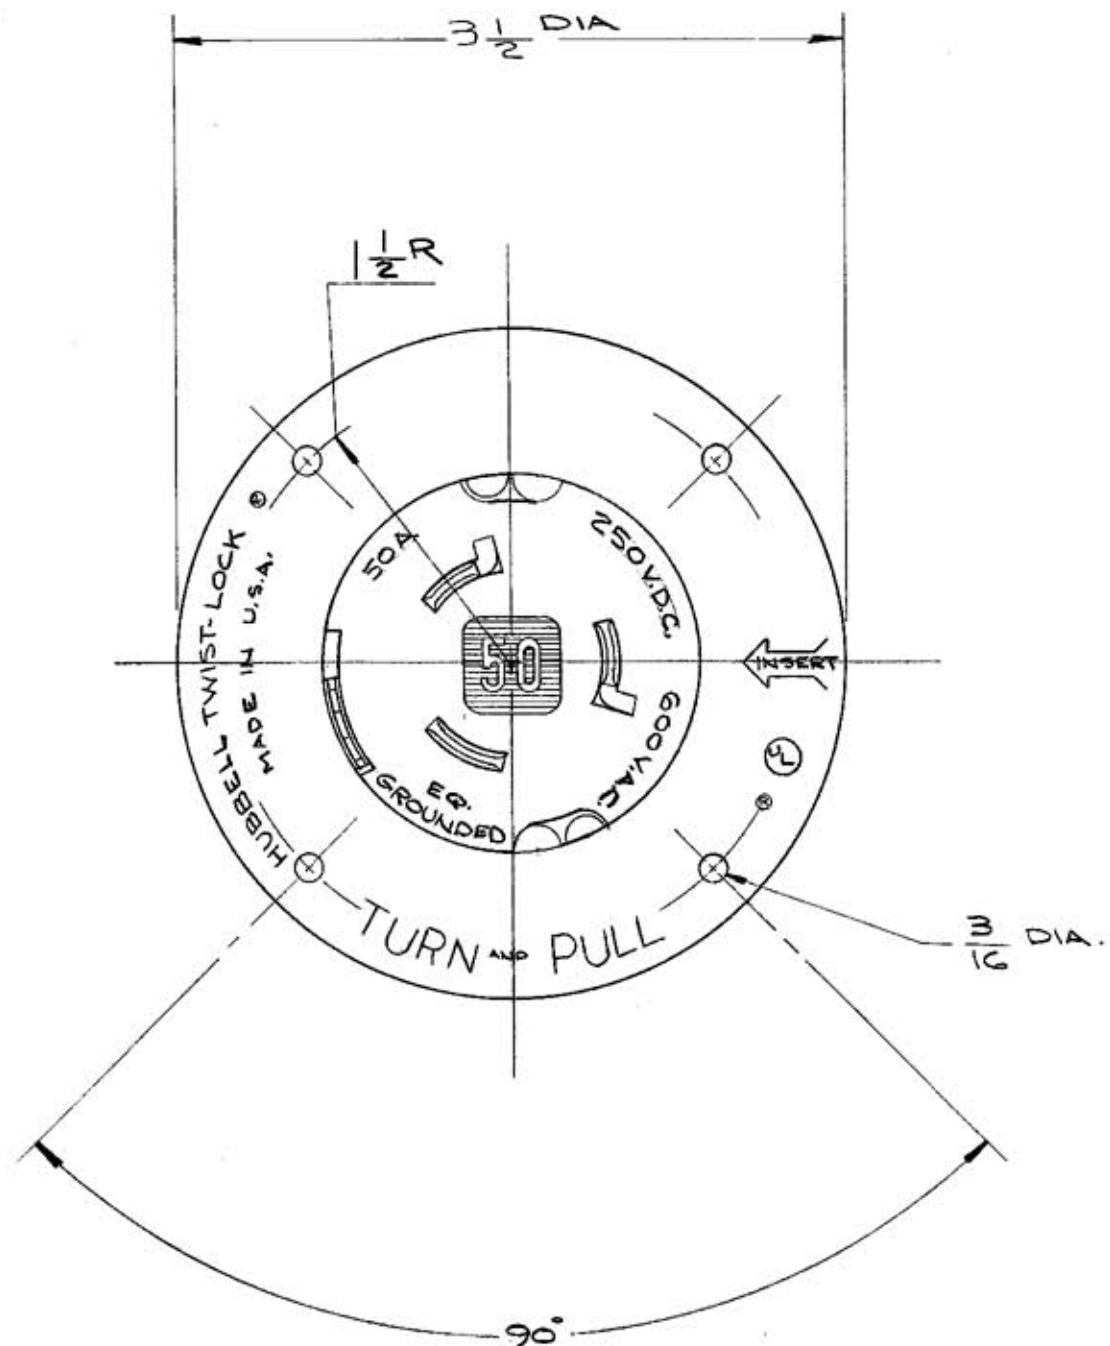

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FLANGED CASING	.062 STEEL	ALUM. SPRAY
INSULATORS	PHENOLIC	
CONTACT BLADES	.100 BRASS	
3- TERMINALS	.070 COPPER	
3- ROUND HD. SCR.	STEEL	ZINC PL.
4- PRESSURE SCR.	STEEL	CADMIUM
GR. SPRING	.025 BRONZE	
GR. TERMINAL	.062 COPPER	

DIMENSION SHEET FOR CAT. NO. 3775

REPAIRABLE ☐ NON-REPAIRABLE ☒

B M-4090

TITLE 50A. 250V.D.C., 50A. 600V.A.C.
3 POLE, 4 WIRE NON-INTERCHANGEABLE
TWIST-LOCK FLANGED INLET

TOLERANCES UNLESS
OTHERWISE SPECIFIED
FRACTIONS $\pm 1/64$
DECIMALS $\pm .005$
ANGLES $\pm 2^\circ$

HARVEY HUBBELL, INC.
BRIDGEPORT, CONN.
DR. BY P.H.F. APP. BY A.S.
TR. BY SCALE 1=1
CHK'D. BY J.C.H. DATE 7-7-64

CODE 74545