

2



INSTRUCTION MANUAL

REPLACEMENT
LIGHT HEAD

PN PD2804

NOT DRAWN TO SCALE


FEATURES:

	FEATURE	POWER
1-FLOOD LIGHT MODE	120V, 50/60Hz, 0.1A,	6W.
FOCUSED END BEAM MODE	APPROX. 10 DEG.	
	120V, 50/60Hz, 0.06A,	3W.

2-COVERED ON OFF SWITCH IN THE HANDLE.

3-ETL LISTED

HUBBELL CAT.# HBLC40182LED

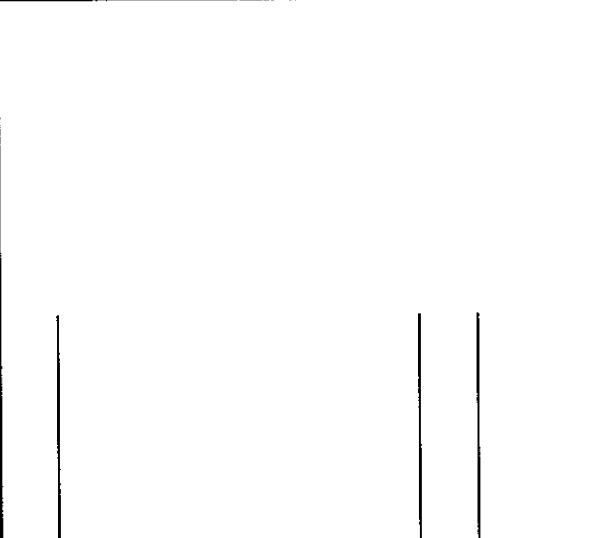

1	RELEASED PER DCN 20541.	DL	12/19/14
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE	
-------	--

LED CORD REEL,
40 FOOT, 18/2

TOLERANCES UNLESS OTHERWISE SPECIFIED XX = ± .01 XXX = ± .005 ANGLES = ± 2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY MZ	APP. BY DL
	TR. BY	SCALE NONE
	CHK. BY DL	DATE 12/19/14

DIVISION STREET FOR CAT NO

REPAIRABLE ☐

NON-REPAIRABLE ☒

M-12590

N