


CATALOG NUMBER	COLOR	NPT THREAD SIZE (MD)*	CONDUIT TRADE SIZE (MD) *	"A" IN. (MM) NUT DIAMETER	"B" IN. (MM)	"C" IN. (MM) NPT THREAD LENGTH	"D" IN. (MM)	"E" IN. (MM) A/C *	"F" IN. (MM) A/C *	"G" IN. (MM)
P038CGY	GRAY	1/2 (16)	3/8 (12)	1.42 (36.1)	1.33 (33.8)	0.63 (16.0)	0.25 (6.4)	1.34 (34.0)	1.29 (32.8)	0.875 (22.2)
P038CBK	BLACK	1/2 (16)	3/8 (12)	1.42 (36.1)	1.33 (33.8)	0.63 (16.0)	0.25 (6.4)	1.34 (34.0)	1.29 (32.8)	0.875 (22.2)
P050CGY	GRAY	1/2 (16)	1/2 (16)	1.42 (36.1)	1.33 (33.8)	0.63 (16.0)	0.25 (6.4)	1.34 (34.0)	1.29 (32.8)	0.875 (22.2)
P050CBK	BLACK	1/2 (16)	1/2 (16)	1.42 (36.1)	1.33 (33.8)	0.63 (16.0)	0.25 (6.4)	1.34 (34.0)	1.29 (32.8)	0.875 (22.2)
P075CGY	GRAY	3/4 (21)	3/4 (21)	1.67 (42.4)	1.41 (35.8)	0.63 (16.0)	0.25 (6.4)	1.59 (40.4)	1.52 (38.6)	1.109 (28.2)
P075CBK	BLACK	3/4 (21)	3/4 (21)	1.67 (42.4)	1.41 (35.8)	0.63 (16.0)	0.25 (6.4)	1.59 (40.4)	1.52 (38.6)	1.109 (28.2)
P100CGY	GRAY	1 (27)	1 (27)	1.93 (49.0)	1.47 (37.3)	0.78 (19.8)	0.25 (6.4)	1.85 (47.0)	1.79 (45.5)	1.375 (34.9)
P100CBK	BLACK	1 (27)	1 (27)	1.93 (49.0)	1.47 (37.3)	0.78 (19.8)	0.25 (6.4)	1.85 (47.0)	1.79 (45.5)	1.375 (34.9)

* MD = METRIC DESIGNATOR, A/C = ACROSS CORNERS, A/F = ACROSS FLATS

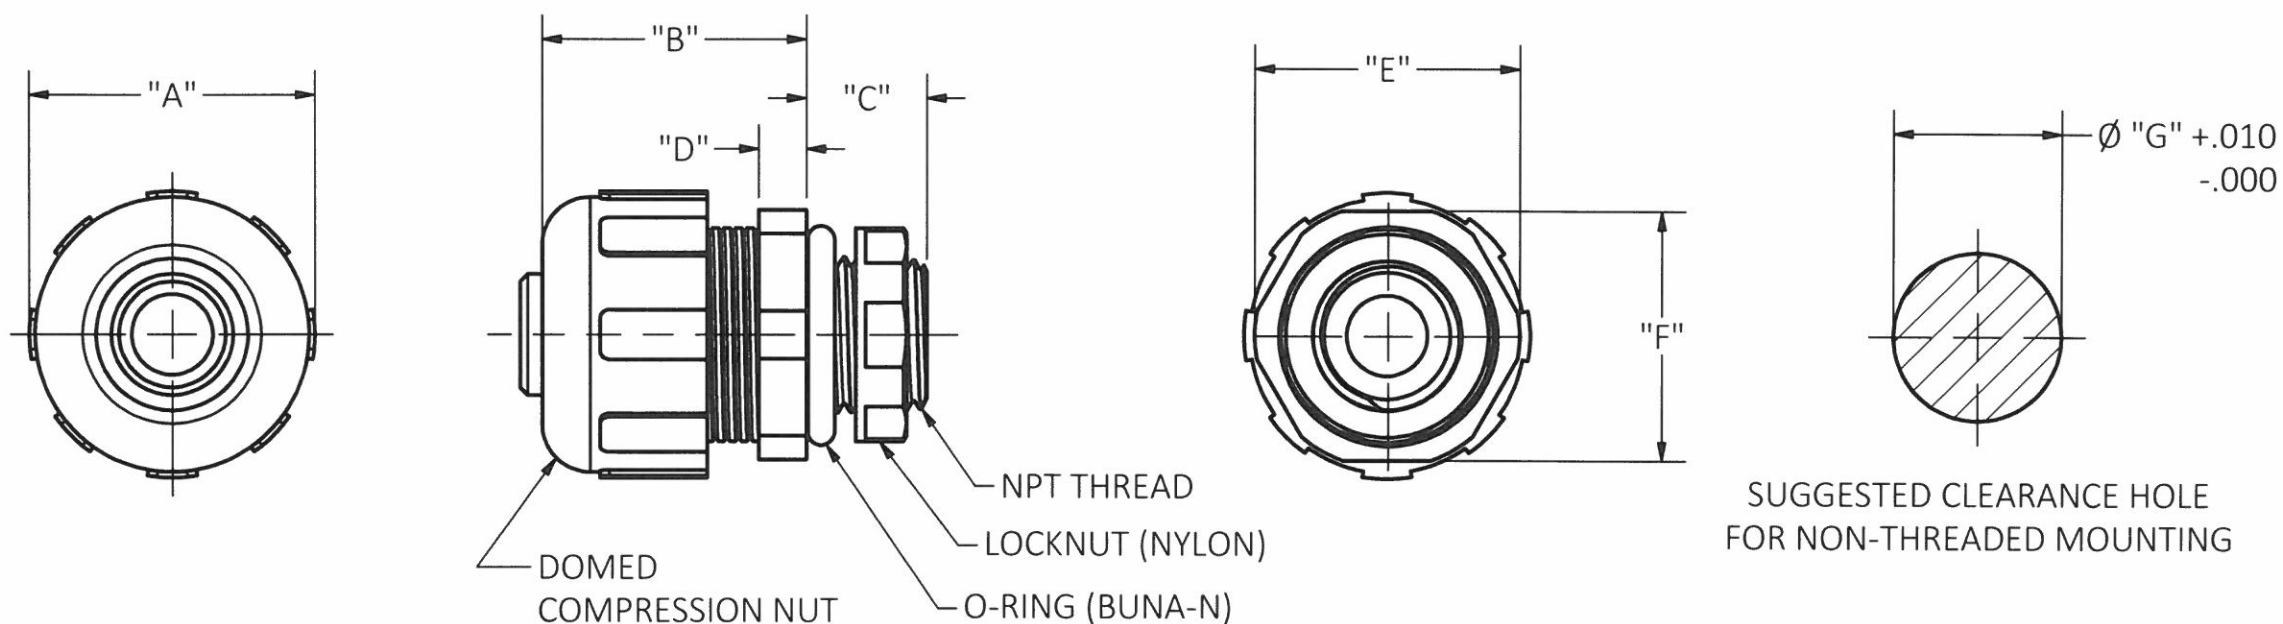

NOTES:

- TEMPERATURE RANGE: -22°F (-30°C) TO 212°F (100°C).
- PROTECTION CLASS: IP 68 UP TO 70 PSI (5 BAR) WATER PRESSURE.
- ROHS COMPLIANCE: THE CONNECTORS MEET EU DIRECTIVE 2011/65/EU (ROHS) AND AMENDMENTS.
- REACH COMPLIANCE: THE CONNECTORS DO NOT CONTAIN THE SUBSTANCES OF VERY HIGH CONCERN (SVHC) IN CONCENTRATIONS GREATER THAN 0.1% BY WEIGHT.
- FLAMMABILITY RATING: 94V-2.
- UL LISTED AND CSA CERTIFIED.
- IN WET LOCATIONS, INSTALL THE O-RING BETWEEN THE BOX AND FITTING.
- INSTALL FITTING TO CONDUIT OR TUBING BY PUSHING CONDUIT INTO THE FITTING UNTIL IT BOTTOMS OUT, AND THEN FULLY HAND TIGHTEN THE COMPRESSION NUT. THERE IS NO NEED TO DISASSEMBLE THE FITTING TO INSTALL OR UNINSTALL IT FROM THE CONDUIT.
- PRIMARY DIMENSIONS ARE IN INCHES. UNITS IN [SI] ARE PROVIDED AS REFERENCE ONLY.
- TOLERANCES: .XX ± .015 .XXX ± .005 ANG. ± 2°; GENERAL TOLERANCES DO NOT APPLY.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
CONNECTOR	NYLON	BLACK/GRAY
O-RING	BUNA-N	BLACK
LOCKNUT	NYLON	BLACK

1	INITIAL RELEASE PER DCN 22738 RM FFS	FFS	11/28/16
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE LIQUID-TIGHT FLEXIBLE
NON-METALLIC CONDUIT OR TUBING
FITTING



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS
OTHERWISE SPECIFIED
.XX = ± .01
.XXX = ± .005
ANGLE TOL. ± 2°

DR. BY R.M.
CHK. BY

SCALE 1 : 1
DATE 11/21/16