


Features

- Ideal for highly corrosive environments
- Non-magnetic
- Protective plastic film helps to prevent scratches and damage

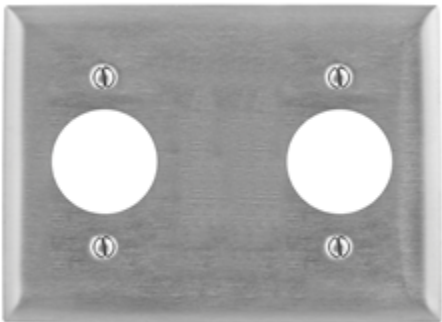

Ordering Information

Description	Catalog Number	UPC
3-Gang, 2-Single Receptacle Opening, 1.40" (40.6) Dia. Hole	SS320	883778200946

Listings

UL Listed
CSA Certified

Specifications

Plate Material	Stainless steel 302/304
Mounting Screws	302/304 SS, Slotted head
Appearance	Horizontal brushed appearance

Online Resources

[eCatalog](#)