

1

DIMENSION SHEET FOR CAT. NO.

SEE TABLE

W

M-14564



1

CATALOG NO. HBL4720CST
(NOT SHOWN TO SCALE)

1	INITIAL RELEASE PER DCN 230906033177	MAM	1/4/24
REV	DESCRIPTION	APP	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].			
TITLE			
2-POLE 3-WIRE TWIST-LOCK® EDGE SCREWLESS TERMINATION PLUG			
		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2°		DR. BY RR	SCALE 1 : 1
		CHK. BY MAM	DATE 1/4/24

CATALOG NO. HBL4720CST
(NOT SHOWN TO SCALE)

- RATING PER TABLE

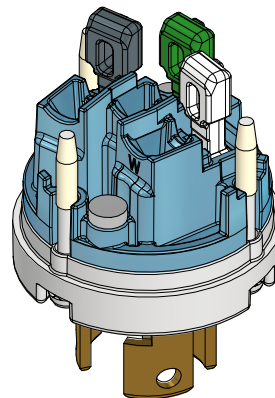

CAT. NO. HBL4720CST
WITHOUT BACK COVER ASSEMBLY
SCALE 1 : 1

CORD CLAMP INSERT ROTATED 180° &
ALIGNED WITH THIS LINE FOR:
CORDType SV: 16/3
CORD Type SJ: 16/3
Cord Diameter: 0.23 to 0.35 inch
(5.8 to 8.9 mm)

REMOVE CORD CLAMP INSERT FOR:
CORD Type S: 14/3 - 10/3
CORD Type SJ: 10/3
Cord Diameter: 0.48 to 0.72 inch (12 to 18.3 mm)

CORD CLAMP INSERT SHIPPED FROM FACTORY
AS SHOWN AND ALIGNED WITH THIS LINE FOR:
CORD: Type S: 16/3
Type SJ: 14/3 - 12/3
Cord Diameter: 0.36 to 0.47 inch (9 to 11.9 mm)

-CAT. NO. PRINTED
ON CORD CLAMP

Technical drawing of a 12V 100Ah battery. The drawing shows the front and side views. The front view features two circular terminals at the top and bottom, and a central rectangular label with the text "12V 100Ah". The side view shows a rectangular battery with a textured surface. Dimensions are provided for the overall width and height.

Dimensions:

- Overall Width: $\varnothing 2.096 \pm .031$ [53.24 $\pm$ 0.79]
- Overall Height: $\varnothing 1.526 \pm .015$ [38.75 $\pm$ 0.38]

NEMA NO.	RATING	POLE/WIRE	CAT. NO.	BLADE CONFIGURATION	VOLTAGE COLOR CODE
L5-15P	15A 125V	2P/3W GROUNDING	HBL4720CST		YELLOW
L6-15P	15A 250V	2P/3W GROUNDING	HBL4570CST		BLUE
L7-15P	15A 277V	2P/3W GROUNDING	HBL4770CST		GRAY

NOTES (UNLESS OTHERWISE SPECIFIED):

1. DIMENSIONS ARE IN INCHES [mm].
2. ALL DEVICES ARE cULus LISTED.
3. WIRING TERMINAL ACCOMMODATION: 16 AWG - 10 AWG STRANDED COPPER WIRE ONLY.
4. ASSEMBLY SCREWS ARE PHILLIPS/SLOTTED.
5. CORD CLAMP SCREWS ARE PHILLIPS/SLOTTED/ROBERTSON HEAD.
6. CATALOG NUMBERS ARE PAD PRINTED ON THE CORD CLAMPS.
7. ALL DEVICES MEET THE PERFORMANCE REQUIREMENTS OF FED. SPEC. W-C-596G/GEN.

CAGE CODE 74545