
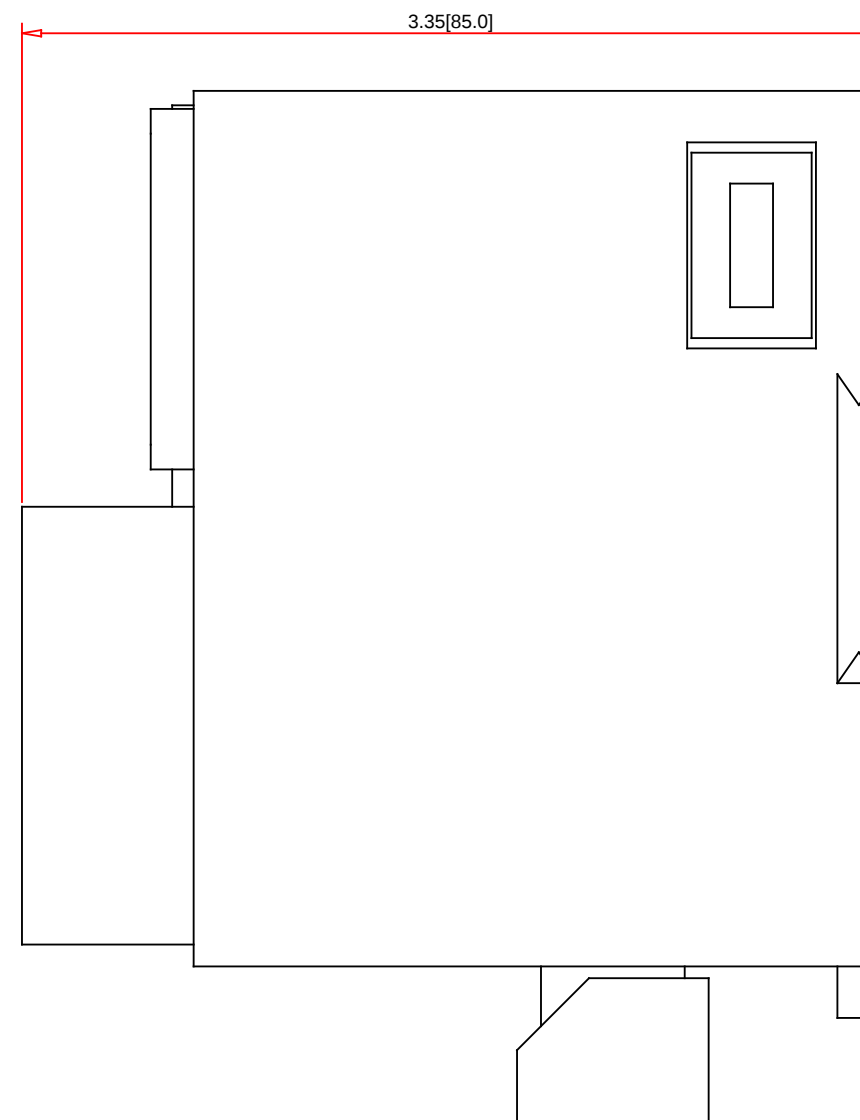


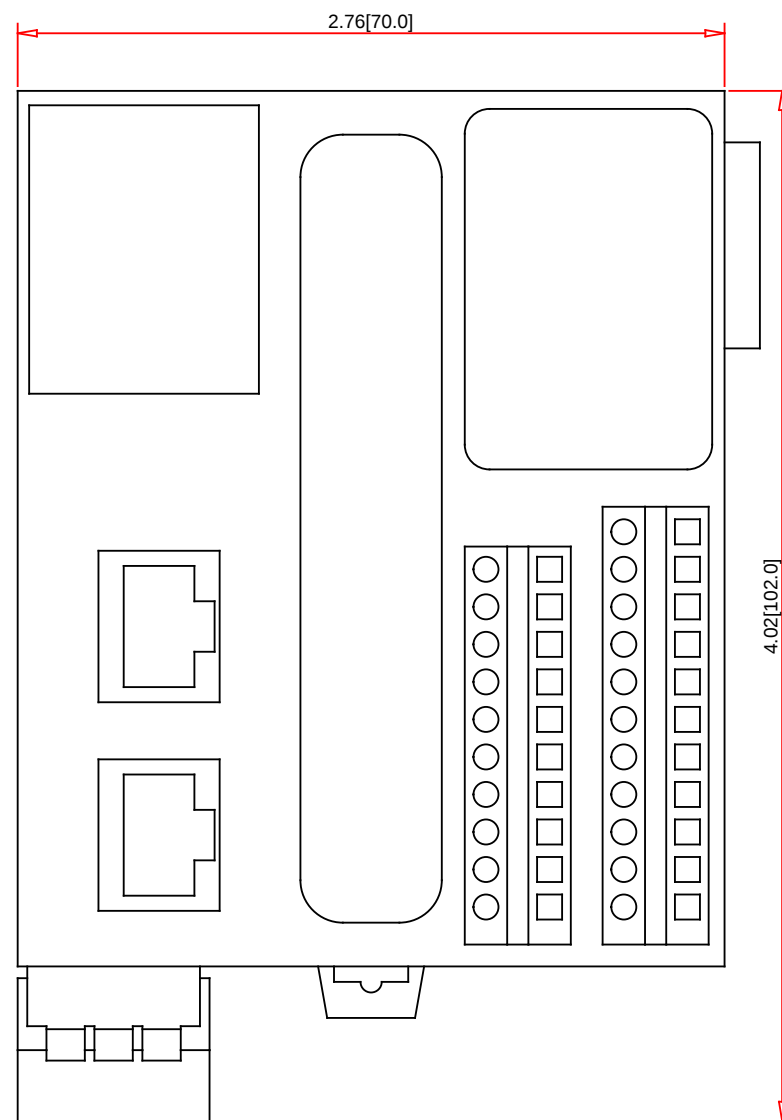


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]
- Connectors are not represented in full detail
- See hardware user manual

Part No.:

TM221ME16R

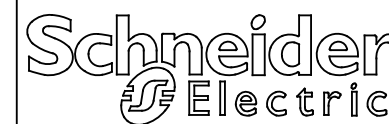

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Discreet Inputs: 8 24V DC incl 4 HSC
Discreet outputs: 8 Relay Out
Analog inputs: 2 0-10V
Operating Temperature: -10°C to 55°C
Storage Temperature: -25°C to 70°C
Certifications: CE, cULus Listing Mark, C-Tick, EAC, LR, ABS, DNV and GL
UL & CSA Standards: UL 508, CSA C22.2 No. 213, No. 142, E61131-2
IEC, EN, ANSI, ISA, ACS Standards: IEC/EN 61131-2, ANSI/ISA 12.12.01-2007, ACS E10
Execution Speed: 0,2 µs / boolean instructions
Program: 10k boolean instructions

Description: Book PLC with 8 inputs (4 high speed), 8 relay outputs, serial/ethernet, screw
Family: Modicon M221
I/O Count: 16
Terminal Type: Screw
Power Supply Voltage: 24 VDC
Serial: 1
Network: 1 ethernet
USB: mini-B
Removable Storage: SD Slot
Weight [lb/kg]: 0.582/0.264

Specification: