

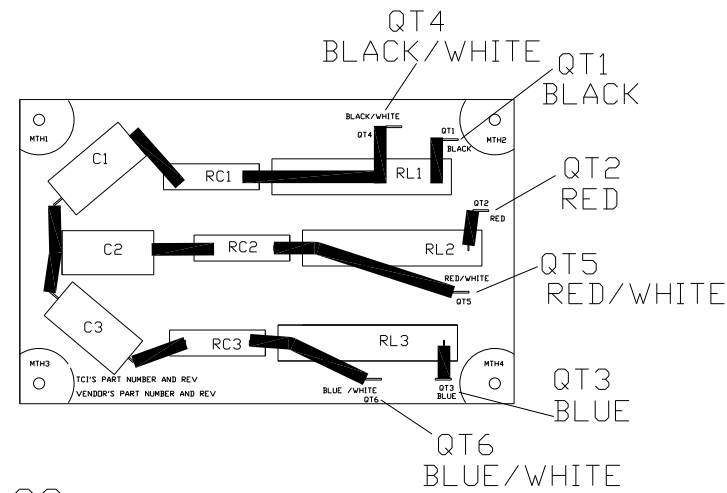
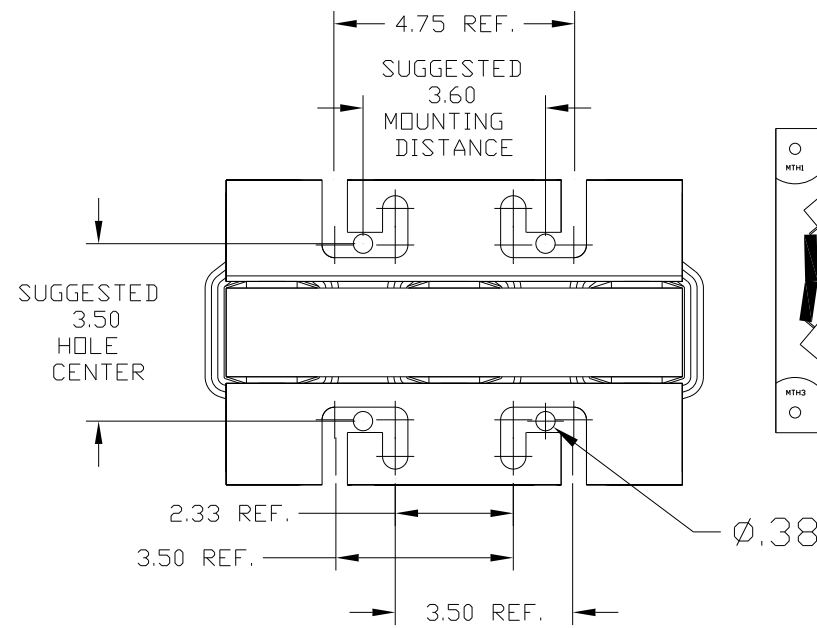
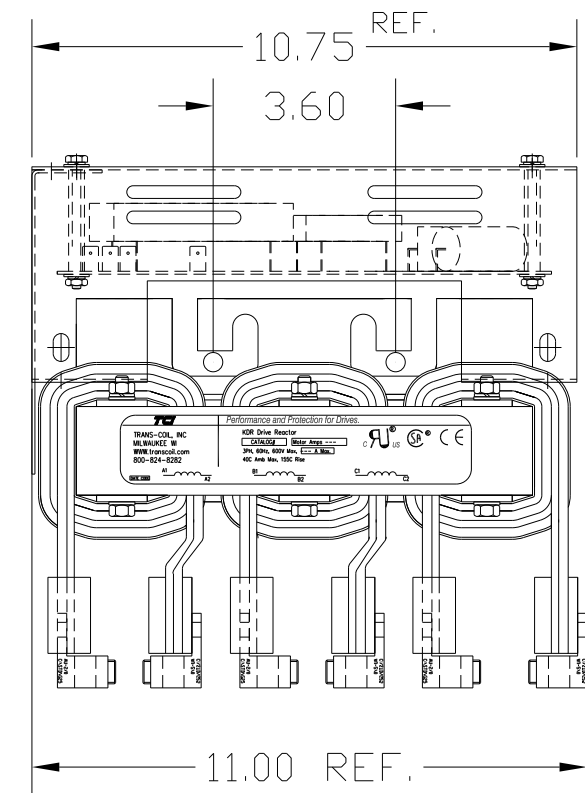
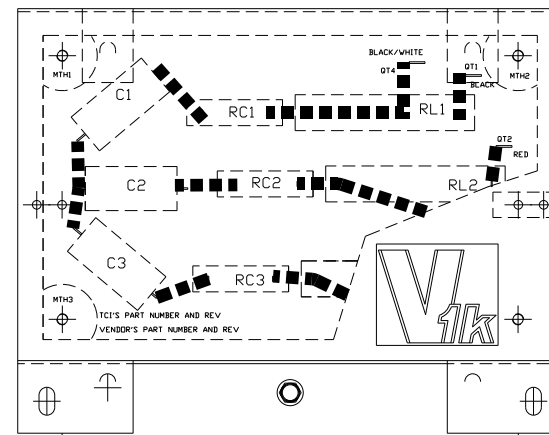
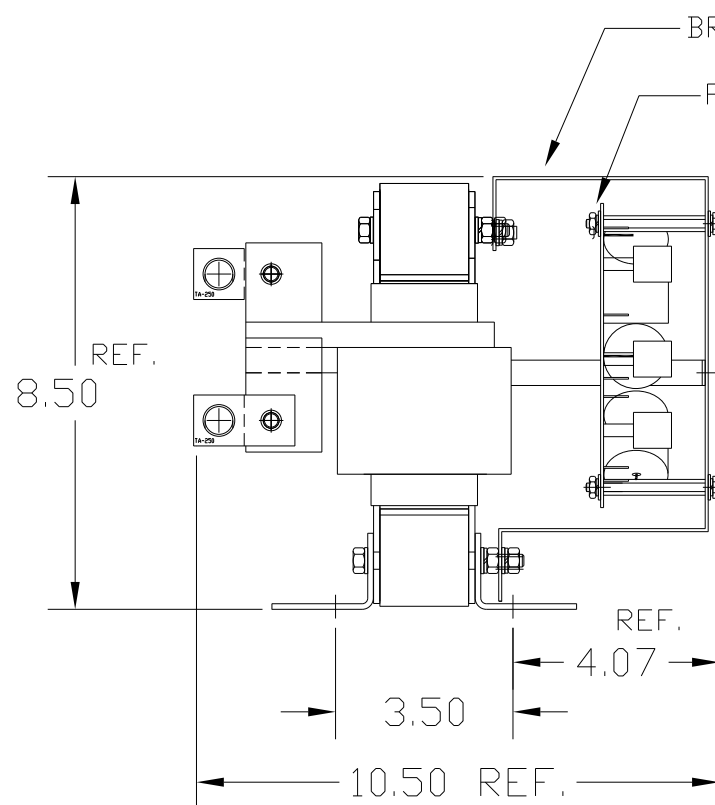


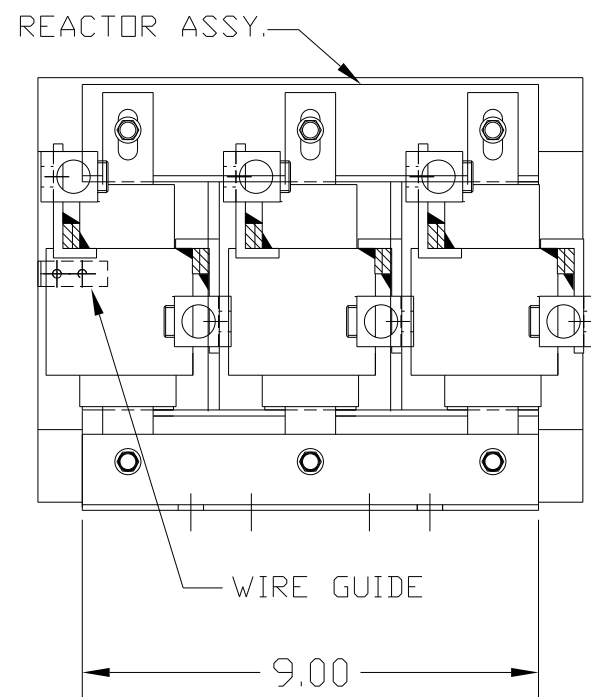

SPECIFICATIONS:					
ENCLOSURE OPEN DESIGN					
AMP.	160	PHASE	3	WGHT.	60 LB.
VOLT	240-600	HZ	60		

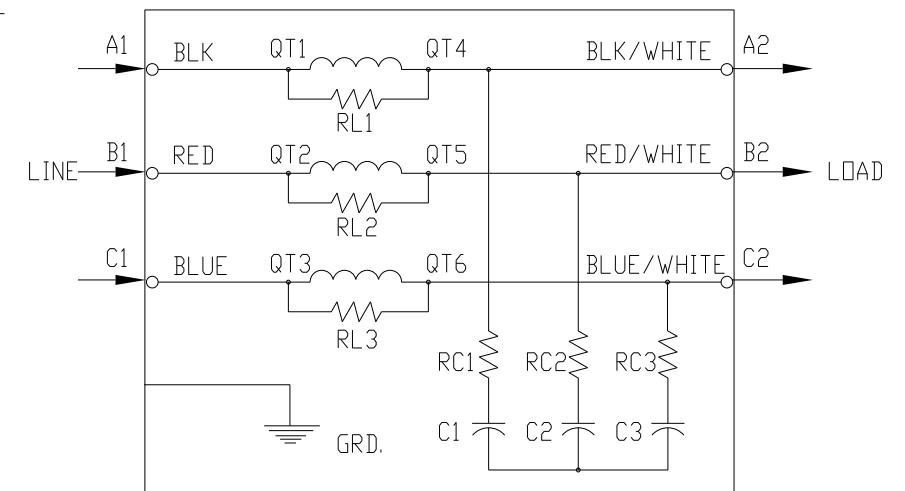

REAR VIEW

WIRE LUG :
RANGE: 250MCM-#6 AWG
275 IN-LB TORQUE

TOLERANCE UNLESS OTHERWISE NOTED:	
MOUNTING	+/- .06
OVERALL	+/- .12

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
F	2716 REMOVE COLOR	1/11/11	DSW	.XX ± .01	V1K160A00 OUTPUT FILTER 160 AMP., OPEN
E	2645, VOLT WAS 480	12/3/09	RJC	.XXX ± .005	
D	2502, NEW WIRE GUIDE	7/17/07	RJC	FRACTIONAL ± 1/32	
NO	REVISION	DATE	BY	ANGULAR ± 1/2°	DRN. BY RJC SCALE -- DATE 5/20/05 APRVD. DWG. NO. 102652DG B SHT. 1 OF 1