
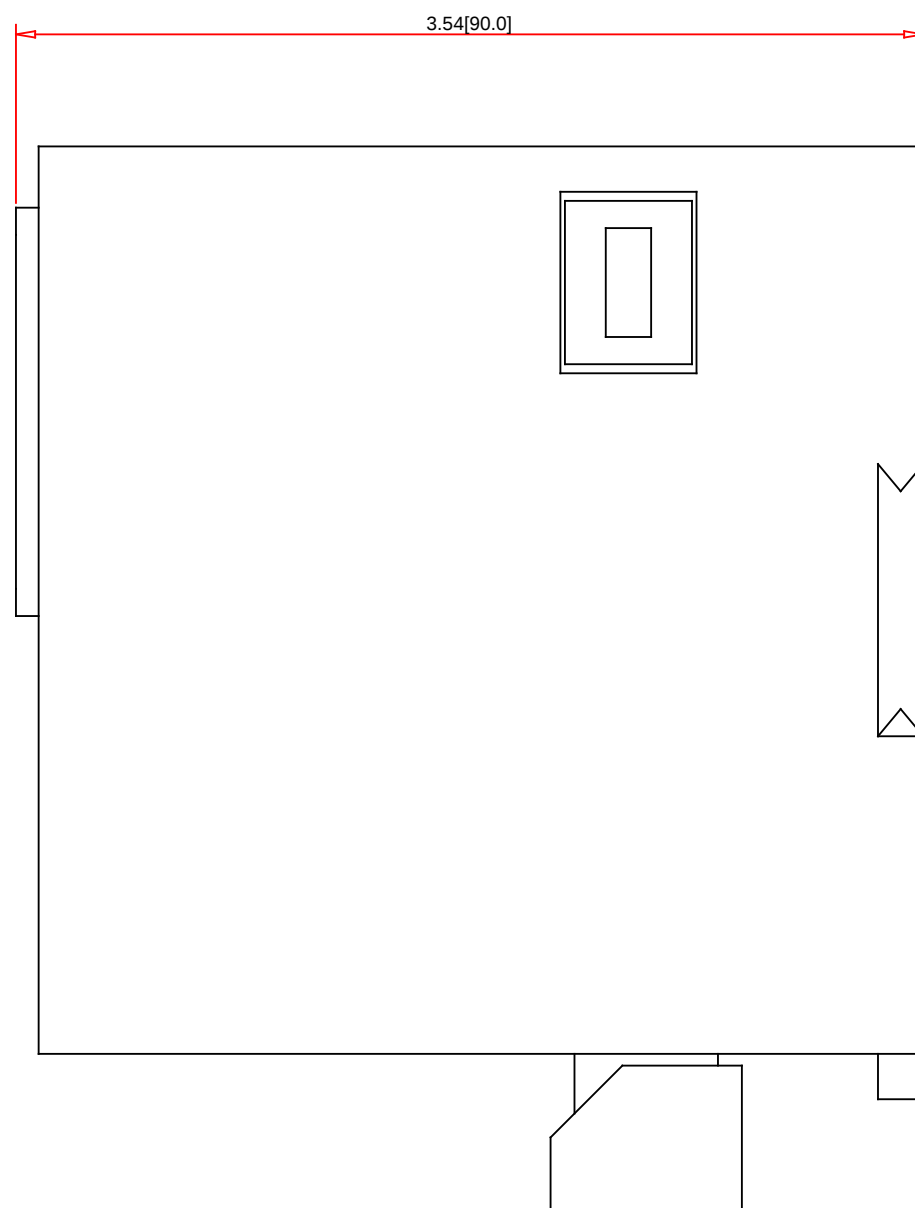


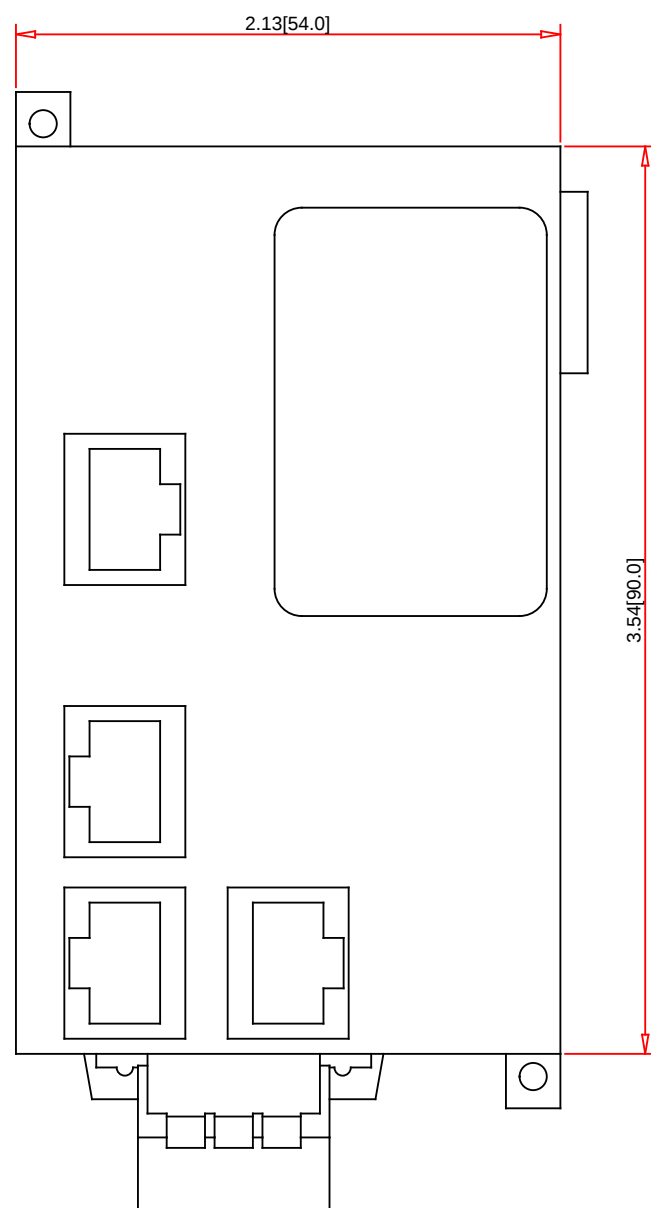

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]
- Connectors are not represented in full detail
- See hardware user manual

Part No.:
TM251MESE

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:
Operating Temperature: -10°C to 55°C
Storage Temperature: -25°C to 70°C
Certifications: CE, cULus/CSA, C-Tick, EAC, LR, ABS, DNV and GL
UL & CSA Standards: UL 508, CSA 22.2 n° 142, CSA E61131-2
IEC, EN, ANSI, ISA, ACS Standards: IEC/EN 61131-2, IACS E10., ANSI/ISA 12.12.01-2007
Execution Speed: 23 ns / boolean instructions
Program: 128k boolean instructions

Specification:
Description: PLC for Distributed Ethernet Control + Ethernet Coms
Family: Modicon M251
Power Supply Voltage: 24 VDC
Serial: 1
Network: 1 dual ethernet, 1 ethernet port for fieldbus
USB: mini-B
Removable Storage: SD Slot
Weight [lb/kg]: 0.22 kg