

# Product data sheet

Specifications

SQUARE D



Loadcentre, QO Canadian, 1 phase, 40 spaces, 80 circuits, 200A main breaker, PoN, NEMA3R, CSA

CQO140M200PRB

Product availability: Stock - Normally stocked in distribution facility

## Main

Marketing Trade Name	QO
Product Type	Load Center

## Complementary

PoN Convertible Mains (lugs)	PoN Convertible Mains (breaker)
Rated Current	200 A
Number of Spaces	40
Max Short Circuit Current Rating	22 kA
Maximum Number of Single Pole Circuits	80
Number of Phases	1 phase
Voltage Rating	240 V AC
Height	33.8 in (858 mm)
Width	14.3 in (362 mm)
Depth	3.7 in (95 mm)

## Environment

Enclosure Rating	NEMA 3R weatherproof enclosure
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	CSA

## Ordering and shipping details

Category	US1DE3A00156
Discount Schedule	DE3A
GTIN	785901971924
Returnability	Yes

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	19.75 in (50.165 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

<b>Package 1 Width</b>	5.25 in (13.335 cm)
<b>Package 1 Length</b>	15.81 in (40.162 cm)
<b>Package weight(Lbs)</b>	25.0004 lb(US) (11.34 kg)

---

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

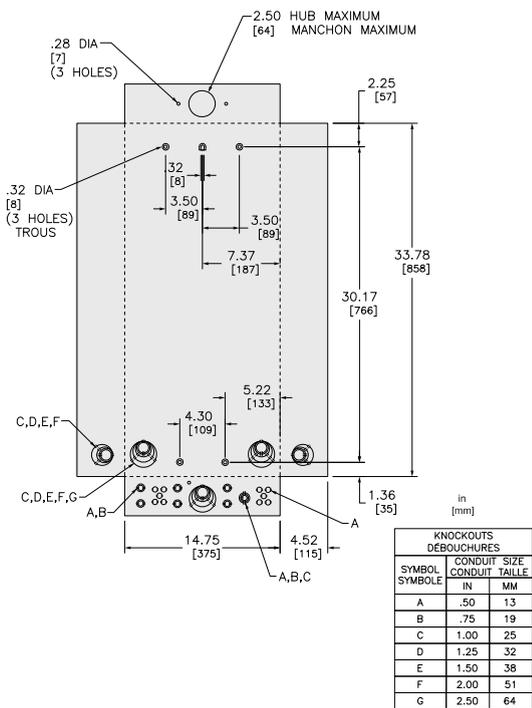

Technical Illustration

Wiring diagram

---