

Product data sheet

Specifications

SQUARE D



Meter center, MP Meter-Pak, 2 sockets, horn bypass, 5 jaws, 200A bus, 125A max breaker rating, ringless

MPH22125

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Meter Center
Socket Rating	125 A
Main Type	Main Lugs
Number of Jaws	5
Number of Meter Sockets	2
Socket Type	Ringless

Complementary

Main Rating	200 A
Bus Rating	200 A
Certifications	UL Listed
Type	Meter-Pak
Busbar Material	Aluminium: busbar
Bypass Type	Horn bypass
Enclosure Material	Steel
Enclosure Rating	NEMA 3R
Maximum Voltage Rating	120/240 V AC
Mounting	Surface
Phase	1 phase
Service Feed Location	UG OH
Wire Size	AWG 4...250 kcmil 1 aluminium AWG 4...250 kcmil 1 copper
Wire Configuration	3-wire

Ordering and shipping details

Category	US10DE400021
Discount Schedule	0DE4
GTIN	785901208105
Returnability	Yes
Country of origin	MX

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	8.300 in (21.082 cm)
Package 1 Width	12.600 in (32.004 cm)
Package 1 Length	38.600 in (98.044 cm)
Package weight(Lbs)	42.8 lb(US) (19.4 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Take-back	No

Technical Illustration

Wiring diagram

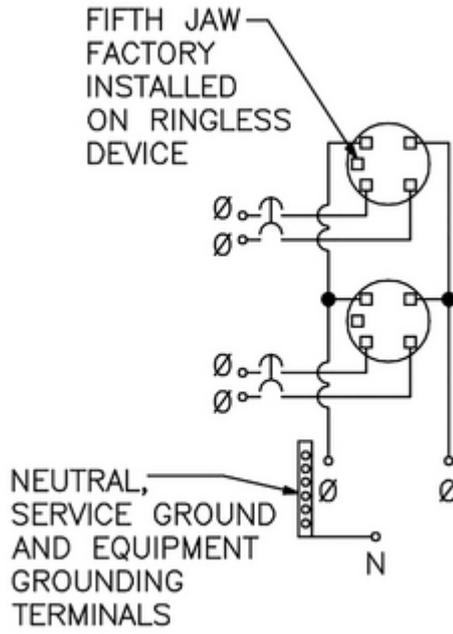


Image of product / Alternate images

Alternative

