



Main

Range	PowerLogic
Product name	PowerLogic PM8000
Device short name	PM8214
Product or Component Type	Power meter

Complementary

Power quality analysis	EN 50160 2010 compliance report IEEE 519 2014 compliance report IEC 61000-4-30 class S power quality measurement Up to the 63rd harmonic Harmonic distortion Waveform capture Voltage sag and swell detection Programmability (logic and math functions) IEC 62586 power quality monitoring
Device Application	Power monitoring WAGES metering
Type of measurement	Current Voltage Frequency Active and reactive power total Apparent power total Power factor total Active and reactive power per phase, rms Apparent power per phase, rms Power factor per phase, rms
Supply voltage	20...60 V DC +/- 10 %
Network Frequency	50 Hz 60 Hz
Line Rated Current	5 A 1 A 10 A
Poles description	3P 1P + N 3P + N
Power consumption in W	17 W
Display Type	Remote LCD display
Display Resolution	320 x 240 pixels QVGA
Sampling rate	256 samples/cycle
Measurement current	50...10000 mA
Analogue input type	Voltage 5 MOhm) Current 0.3 mOhm)
Measurement voltage	57...400 V AC 42...69 Hz between phase and neutral 100...690 V AC 42...69 Hz between phases
Frequency measurement range	42...69 Hz
Number of inputs	3 digital 30 V AC 3 digital 60 V DC

Measurement accuracy	Current +/- 0.1 % Voltage +/- 0.1 % Active energy +/- 0.2 %
Accuracy class	Class 0.2S active energy IEC 62053-22 Class 0.2 active energy ANSI C12.20 Class 0.2 active power IEC 61557-12 Class 0.5S reactive energy IEC 62053-24 Class 0.5 power factor IEC 61557-12 Class 0.2 voltage IEC 61557-12 Class 0.2 current IEC 61557-12
Number of Outputs	1 pulse
Information displayed	Voltage Current Frequency Power Energy consumption Harmonic distortion
Communication port protocol	Modbus RTU 115 kbauds - 2-wire ION 115 kbauds - 2-wire DNP3 IEC 61850 Modbus TCP/IP Ethernet Modbus TCP/IP daisy chain 10/100 Mbit/s RSTP 801.1d 2004
Communication port support	Ethernet Screw terminal block RS485
Communication Network Type	IPv6 (internet protocol)
Data recording	Harmonics logs Waveform logs Trending/Forecasting Event logs Alarm logs Data logs Sequence of event recording Sag and swell logs Min/Max of instantaneous values Time stamping GPS synchronisation
Memory capacity	512 MB
Web services	Customizable home page File upload/download via FTP File upload/download via SFTP Web server Alarm notification by e-mail Viewing of captured waveform (FTP) Viewing of captured waveform (web) HTTPS server
Communication Service	RSTP support DHCP SMTP e-mail notification NTP time synchronization SNMP PTP time synchronization
Cybersecurity	Enable/Disable communication ports Robust security logs Port hardening Password protection Syslog protocol support
Mounting Mode	Clip-on Flush-mounted
Mounting support	DIN rail meter device Framework remote display
Provided Equipment	Remote display
Installation category	III
Safety Construction	III400...690 V conforming to IEC 61010-1:ed. 3 III400...690 V conforming to EN 61010-1:ed. 3 III347...600 V conforming to UL 61010-1:ed. 3 III347...600 V conforming to CSA C22.2 No 61010-1:ed. 3

Standards	IEC 61557-12 IEC 62052-11 IEC 62053-24 IEC 62053-22 IEEE 1588 IEC 62586-2 IEC 61326-1
Product certifications	CE CULus N998
Width	3.56 in (90.5 mm)
Depth	3.57 in (90.8 mm)
Height	3.56 in (90.5 mm)
Net Weight	18.62 oz (528 g)

Environment

Electromagnetic compatibility	Electrostatic discharge IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test IEC 61000-4-3 Electrical fast transient/burst immunity test IEC 61000-4-4 Surge immunity test IEC 61000-4-5 Conducted RF disturbances IEC 61000-4-6 Magnetic field at power frequency IEC 61000-4-8 Voltage dips and interruptions immunity test IEC 61000-4-11 Immunity to impulse waves IEC 61000-4-12 Conducted and radiated emissions EN 55022 Conducted and radiated emissions EN 55011 Conducted and radiated emissions FCC part 15 Conducted and radiated emissions ICES-003 Conducted RF disturbances 2...150 Hz) CLC/TR 50579 Surge withstand IEEE C37.90.1
IP degree of protection	IP30 IEC 60529
Relative humidity	5...95 %
Ambient air temperature for operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Operating altitude	9842.52 ft (3000 m)

Ordering and shipping details

Category	09797-POWERLOGIC PM8000 HARDWARE
Discount Schedule	PL1
GTIN	3606481384560
Nbr. of units in pkg.	1
Package weight(Lbs)	3.17 lb(US) (1.437 kg)
Returnability	No

Packing Units


Unit Type of Package 1	PCE
Package 1 Height	5.51 in (14 cm)
Package 1 width	5.51 in (14 cm)
Package 1 Length	14.57 in (37 cm)
Unit Type of Package 2	P06
Number of Units in Package 2	16
Package 2 Weight	73.32 lb(US) (33.256 kg)
Package 2 Height	17.72 in (45 cm)
Package 2 width	31.50 in (80 cm)
Package 2 Length	23.62 in (60 cm)
Unit Type of Package 3	S03
Number of Units in Package 3	4
Package 3 Weight	13.64 lb(US) (6.189 kg)
Package 3 Height	11.81 in (30 cm)
Package 3 width	11.81 in (30 cm)
Package 3 Length	15.75 in (40 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Approximate Dimensions

PM8000 DIN Rail Mount Meter

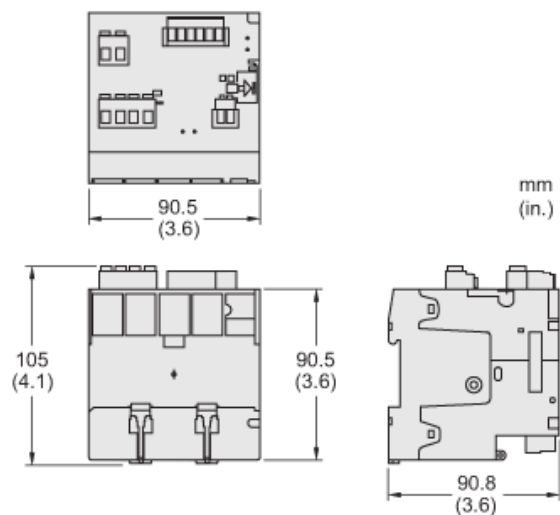

PM8000 Remote Display

