Module Front

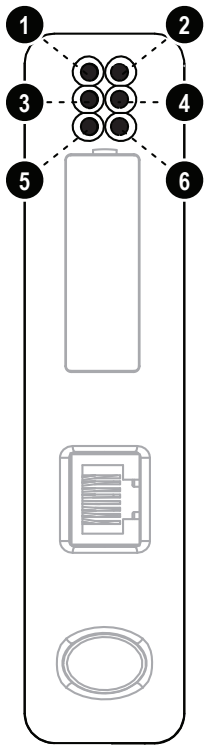

LED Indicators

LED no	Indication	Meaning
1 (Module Status)	Off Green Flashing Green Flashing Red Red Flashing Green/Red	No power The module is operating correctly Not configured or scanner in idle state Minor fault, recoverable Major fault, unrecoverable Self test in progress
2 (Network Status)	Off Green Flashing Green Red Flashing Red Flashing Green/Red	No IP address Online, one or more EtherNet/IP connections established Online, no connection established Duplicate IP address One or more connections timed out Self test in progress
3 (Link)	Off Green	No link Connected to an Ethernet network
4 (Activity)	Off Flashing Green	No Ethernet activity Activity, receiving/transmitting Ethernet packets
5 (Subnet Status)	Flashing green Green Red	Running, but one or more transaction errors Running Transaction error/timeout or subnet stopped
6 (Device Status)	Off Alternating red/green Green Flashing green Red Flashing red	Power off Invalid or missing configuration Initializing Running Bootloader mode Note the flash sequence pattern and contact the HMS support department

Accessories Checklist

The following items are required for installation:

- Anybus Communicator Resource CD (Includes configuration software, manuals, EDS file and application notes)
- RS232 configuration cable
- Subnetwork connector
- Ethernet cable and connector (not included)

Installation and Startup Summary

- Mount the Communicator on the DIN-rail.
- Connect the Communicator to the EtherNet/IP network.
- Connect the module to the subnetwork.
- Turn on the module (+24 V DC).
- Connect the configuration cable between the module and the PC containing the Anybus Configuration Manager software.
- Configure the module using Anybus Configuration Manager.
- Include the Anybus Communicator EDS file in the EtherNet/IP configuration tool.
- Configure and start the EtherNet/IP network.

Bottom View

PC Connector:
1. GND
2. GND
3. RS232 Rx
4. RS232 Tx

Power:
1. +24 V DC
2. GND

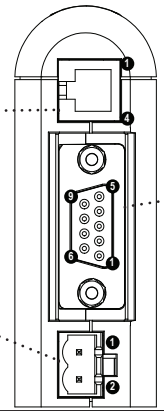

Subnetwork Connector

Pin no.	Description
1	+5V OUT
2	RS232 Rx
3	RS232 Tx
4	NC
5	Signal GND
6	RS422 Rx+
7	RS422 Rx-
8	RS485+ / RS422 Tx+
9	RS485- / RS422 Tx-

EtherNet/IP Connector



Pin no	Description
1	TD+
2	TD-
3	RD+
6	RD-
4, 5, 7, 8	Termination

Further information and documents about this product can be found at the product pages on www.anybus.com.

UL Certification



**IND: CONT. EQ.
FOR HAZ LOC.
CL I, DIV 2
GP A,B,C,D
TEMP
CODE
E203225**

Warnings

- **WARNING - EXPLOSION HAZARD - SUBSTITUTION OF ANY COMPONENTS MAY IMPAIR SUITABILITY FOR CLASS I, DIVISION 2.**
- **WARNING - EXPLOSION HAZARD - WHEN IN HAZARDOUS LOCATIONS, TURN OFF POWER BEFORE REPLACING OR WIRING MODULES.**
- **WARNING - EXPLOSION HAZARD - DO NOT DISCONNECT EQUIPMENT UNLESS POWER HAS BEEN SWITCHED OFF OR THE AREA IS KNOWN TO BE NONHAZARDOUS.**

Additional installation and operating instructions

Max Ambient Temperature: 55°C (for Hazloc environments)

Field wiring terminal markings (wire type (Cu only, 14-30 AWG)).

Use 60/75 or 75°C copper (Cu) wire only.

Terminal tightening torque must be between 5-7 lb-in (0.5 - 0.8 Nm).

Use in overvoltage category 1 pollution degree 2 environment.

Installed in an enclosure considered representative of the intended use.

Secondary circuit intended to be supplied from an isolating source and protected by overcurrent protective devices installed in the field sized per the following:

Control-circuit Wire Size		**Maximum Protective Device Rating**
AWG	(mm^2)	Amperes
22	(0.32)	3
20	(0.52)	5
18	(0.82)	7
16	(1.3)	10
14	(2.1)	20
12	(3.3)	25

EMC Compliance (CE)



This product is in accordance with the EMC directive 89/336/EEC, with amendments 92/31/EEC and 93/68/EEC through conformance with the following standards:

- **EN 50082-2 (1993)**
  EN 55011 (1990) Class A
- **EN 61000-6-2 (1999)**
  EN 61000-4-3 (1996) 10 V/m
  EN 61000-4-6 (1996) 10 V/m (all ports)
  EN 61000-4-2 (1995) ±8 kV Air Discharge
  ±4 kV Contact discharge
  EN 61000-4-4 (1995) ±2 kV Power port
  ±1 kV Other ports
  EN 61000-4-5 (1995) ±0.5 kV Power ports (DM/CM)
  ±1 kV Signal ports

Further information and documents about this product can be found at the product pages on www.anybus.com.