


CONNECTION DIAGRAM



PROVIDED WITH SAFE TOUCH TERMINAL COVERS.
NO INTEGRAL FUSING CAPABILITY.

DIMENSIONS							APPROX.WT. LBS (KG)
	A	B	C	D	E	MTG. SLOTS	
INCHES (MM)	5.13 (130)	5.25 (133)	4.50 (114)	4.38 (111)	4.38 (111)	0.313X1.063 (8.0X27.0)	

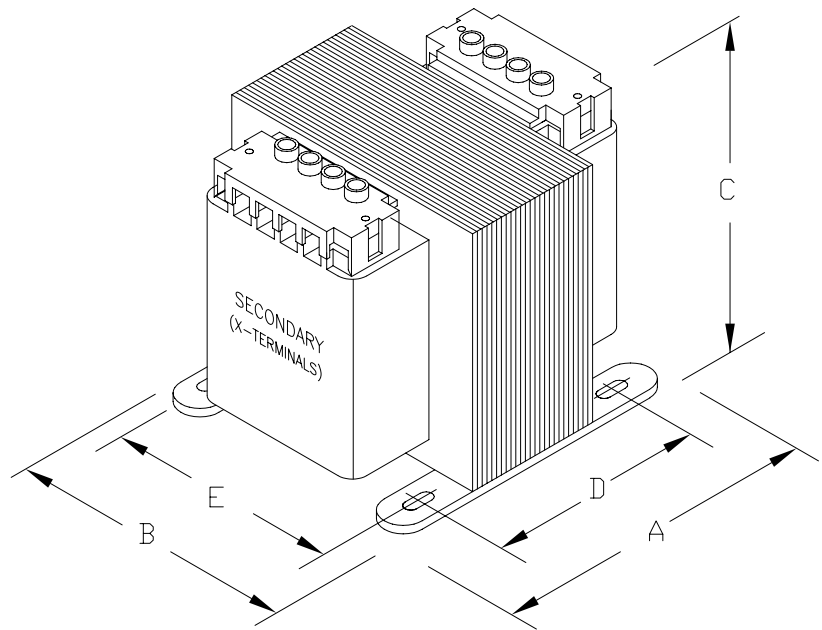

MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800) 664-4660, (630) 516-1222 Fax (630) 516-1820
www.MicronTransformers.com

CAT.NO. B500-2009-GAF				CONST. ENCAPSULATED			 LISTED	
				MODEL GLOBALTRAN				
RATING								 CERTIFIED
OUTPUT AMPS	4.35	PRIMARY V	240X480, 230X460, 220X440		TEMP. CLASS	HZ 50/60	 IEC 61558	
VA	500	SECONDARY V	120, 115, 110		130°C	REVISION G		