

Braces and Brackets - Between Studs

Applications

9004R - 9006R, 9015R

- RACO® Braces and extenders are used for metal or wood stud box positioning

Product Features

- Available for 1-1/2" or 2-1/8" deep boxes
- Locator dimples on face of bar allows for exact positioning of single or multiple boxes
- Dimple feature provides quick start of screws, and reinforcement to prevent box mounting screws from stripping out when box is mounted
- Design of adjustable brace allows ground screw to clear when box is mounted
- Boxes attach easily with self-tapping screws

Compliance

-  US LISTED

Applications - 9001, 9002


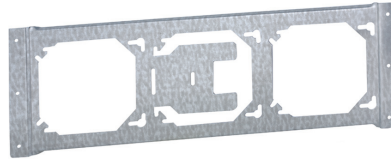
- Positions electrical boxes, plaster rings and low voltage devices between studs

Product Features

- Fold-back stabilizer leg prevents bracket from being pushed back in wall cavity during drywall installation
- Designed for 2-1/2" or 3-1/2" studs.
- Mounts 4" or 4-11/16" sq. boxes
- Box can be mounted on ring without raised cover to save time by providing maximum work area inside box
- When mounted, raised cover is brought to within 1/16" of drywall every time and will not bulge or break out drywall

Compliance

-  US LISTED

**9015R****9004R, 9006R****9001****9002**

Mounting Braces and Brackets

Catalog #	Description	Std. Pkg.	Bar Code
Non-Adjustable Box Mounting Brace - For 4" and 4-11/16" Square Box			
9004R	For 16" stud spacing, 1-1/2" or 2-1/8" deep box	50	—
9006R	For 24" stud spacing, 1-1/2" or 2-1/8" deep box	50	—
Adjustable Box Mounting Brace - For 4" and 4-11/16" square box			
9015R	Adjusts from 15" to 26", 1-1/2" or 2-1/8" deep box	50	—
Fixed Position Box Mounting Brackets - For 4" and 4-11/16" square box			
9001	(3) Box, for 16" O. C. studs	50	—
9002	(4) Box, for 24" O. C. studs	50	—