

# Product data sheet

Specifications



## sub-base - soldered electromechanical relays ABE7 - 16 channels - relay 10 mm

ABE7R16S210

### Main

Range of product	Modicon ABE7
Product or component type	Electromechanical output relay sub-base
[Us] rated supply voltage	24 V DC for PLC end
Number of channels	16
Number of terminal per channel	2

### Complementary

Terminal block type	Removable
Polarity distribution	Volt-free
Fixing mode	By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit)
Maximum current per output common	10 A
Current per channel	5 A for preactuator end
Minimum switching current	10 mA at $\geq 5$ V
Drop-out voltage	2.4 V at 20 °C (PLC end)
Switching frequency	$\leq 0.5$ Hz $\leq 10$ Hz
Threshold tripping voltage	19.7 V at 40 °C
Drop-out current	1 mA at 20 °C
Maximum power dissipation per channel in W	0.36 W (PLC end)
Contacts type and composition	1 NO for preactuator end
Maximum switching voltage	250 V AC 50/60 Hz conforming to IEC 60947-5-1 30 V DC conforming to IEC 60947-5-1
Electrical durability	500000 cycles, maximum switching current: 600 mA at 24 V DC-13 10 ms (preactuator end) 500000 cycles, maximum switching current: 1500 mA at 230 V AC-12 (preactuator end) 500000 cycles, maximum switching current: 1500 mA at 24 V DC-12 (preactuator end) 500000 cycles, maximum switching current: 900 mA at 230 V AC-15 (preactuator end)
electrical reliability	1e-008
Operating time	$\leq 10$ ms coil energisation and NO closing $\leq 5$ ms coil de-energisation and NO opening
Contact bounce time	$\leq 5$ ms 1 NO
Operating rate in Hz	10 Hz no load 0.5 Hz at $I_e$

<b>Mechanical durability</b>	2000000 cycles
<b>[Uiimp] rated impulse withstand voltage</b>	2.5 kV conforming to IEC 60947-1
<b>[Ui] rated insulation voltage</b>	2000 V
<b>Installation category</b>	II conforming to IEC 60664-1
<b>Tightening torque</b>	0.6 N.m with flat Ø 3.5 mm screwdriver
<b>Width</b>	206 mm
<b>Net weight</b>	0.405 kg

## Environment

<b>Max immunity to microbreaks</b>	5 ms
<b>Dielectric strength</b>	2000 V conforming to IEC 60947-1
<b>Product certifications</b>	GL CSA DNV UL EAC
<b>IP degree of protection</b>	IP2X conforming to IEC 60529
<b>Protective treatment</b>	TC
<b>Resistance to incandescent wire</b>	750 °C, extinction time <30 s conforming to IEC 60695-2-11
<b>Shock resistance</b>	15 gn for 11 ms conforming to IEC 60068-2-27
<b>Resistance to radiated fields</b>	10 V/m (26000000...1000000000 Hz) conforming to IEC 61000-4-3 level 3
<b>Resistance to fast transients</b>	2 kV level 3 conforming to IEC 61000-4-4
<b>Ambient air temperature for operation</b>	-5...60 °C conforming to IEC 61131-2
<b>Ambient air temperature for storage</b>	-40...80 °C conforming to IEC 61131-2
<b>Pollution degree</b>	2 conforming to IEC 60664-1

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	7.000 cm
<b>Package 1 Width</b>	8.200 cm
<b>Package 1 Length</b>	21.100 cm
<b>Package 1 Weight</b>	581.000 g
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	15
<b>Package 2 Height</b>	30.000 cm
<b>Package 2 Width</b>	30.000 cm
<b>Package 2 Length</b>	40.000 cm
<b>Package 2 Weight</b>	9.103 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	1040
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	1bbe7d20-74c0-4e7e-b98b-d2946f4ab8b4
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>

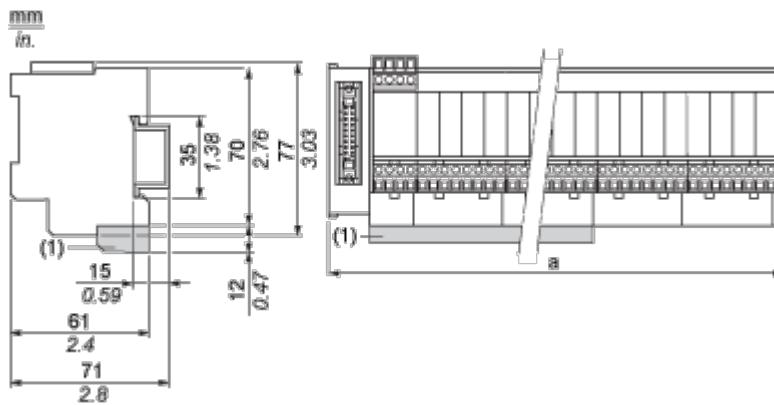
## Use Again

### Repack and remanufacture

End of life manual availability	<a href="#">End of Life Information</a>
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Dimensions Drawings

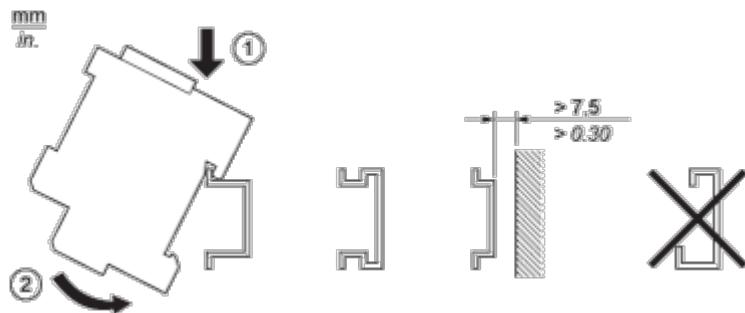
## Dimensions



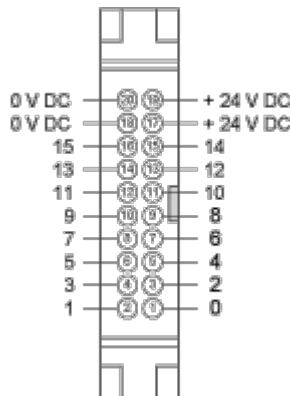
(1) ABE7BV20 / ABE7BV20E

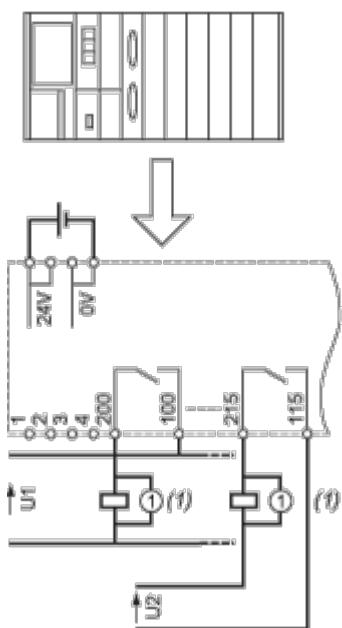
ABE7	a in mm	a in in.
R16S111 / R16S111E	125	4.92
R16S21 / R16S21•E	206	8.11

## Mounting and Clearance

Mounting

## Connections and Schema

HE10 16 Channels

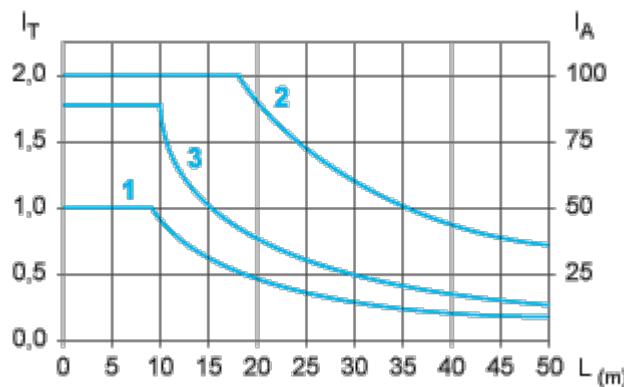
Wiring Diagram

(1) Inductive load

## Performance Curves

Curves for Determining Cable Type and Length According to the Current

## 16-channel Sub-base



L Cable length

$I_T$  Total current per sub base (A)

$I_A$  Average current per channel (mA)

(1) TSXCDP•2 and ABFH20H•0 cables with c.s.a.  $0.08 \text{ mm}^2$  (AWG 28).

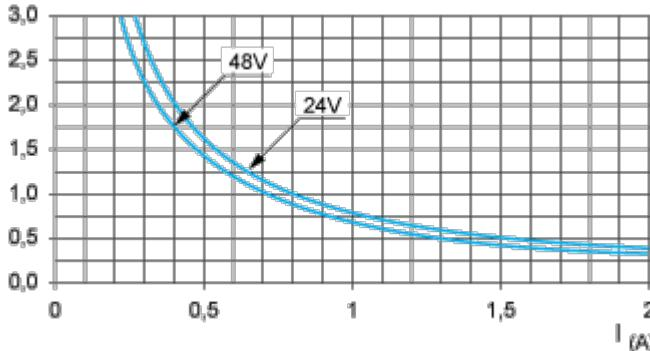
(2) TSXCDP•3 cables with c.s.a.  $0.34 \text{ mm}^2$  (AWG 22).

(3) Cables with c.s.a.  $0.13 \text{ mm}^2$  (AWG 26).

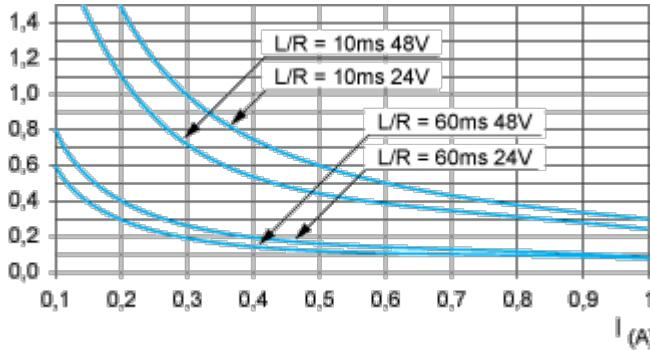
The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.

**Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1****DC Loads**

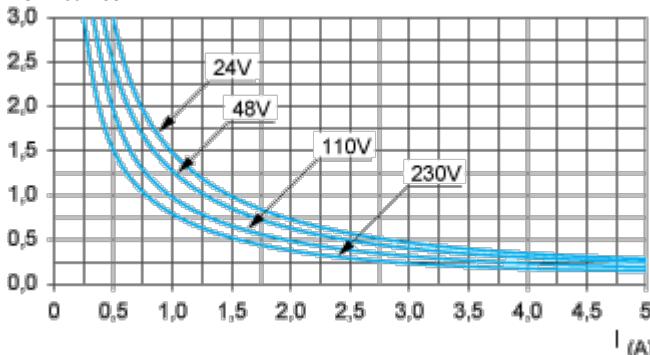
DC12 curves

DC12 control of resistive loads and of solid state loads isolated by optocoupler,  $I/R \leq 1 \text{ ms}$ .

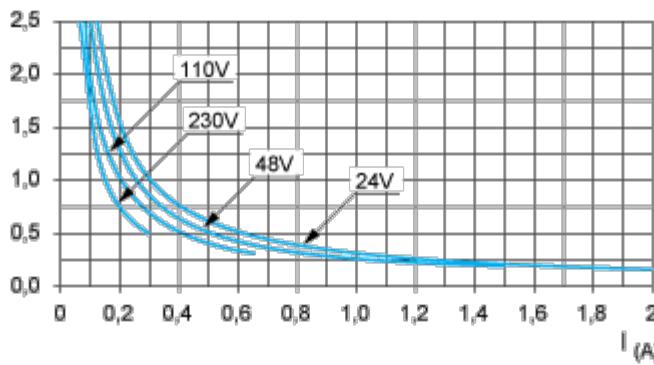
DC13 curves

DC13 switching electromagnets,  $L/R \leq 2 \times (U_e \times I_e)$  in ms,  $U_e$ : rated operational voltage,  $I_e$ : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)**AC Loads**

AC12 curves

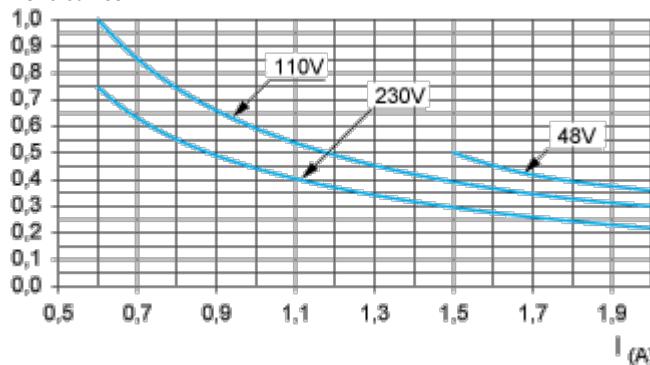
AC12 control of resistive loads and of solid state loads isolated by optocoupler,  $\cos \phi \geq 0.9$ .

AC14 curves



AC14 control of small electromagnetic loads  $\leq 72$  VA, make:  $\cos \phi = 0.3$ , break:  $\cos \phi = 0.3$ .

AC15 curves



AC15 control of electromagnetic loads  $> 72$  VA, make:  $\cos \phi = 0.7$ , break:  $\cos \phi = 0.4$ .

Image of product / Alternate images

Alternative

---

