

# Product data sheet

Specifications



Circuit breaker, PowerPact B, 60A, 3 pole, 600Y/347VAC, 18kA, lugs, thermal magnetic, 80%, control wire ON end

BGL36060LU

**Product availability:** Non-Stock - Not normally stocked in distribution facility

## Main

Range	PowerPact
Product name	PowerPact B
Device short name	BG 060
Product or Component Type	Circuit breaker
Device Application	Distribution

## Complementary

Line Rated Current	60 A
Number of Poles	3P
Protected poles description	3t
Control Type	Toggle
Breaking capacity code	G
Breaking capacity	65 kA 208Y/120 V AC 50/60 Hz UL 489 65 kA 240 V AC 50/60 Hz UL 489 35 kA 480/277 V AC 50/60 Hz UL 489 35 kA 480 V AC 50/60 Hz UL 489 20 kA 250 V DC UL 489 18 kA 600Y/347 V AC 50/60 Hz UL 489
[Ue] rated operational voltage	525 V AC 50/60 Hz UL 489
Network Frequency	50/60 Hz
[Ics] rated service breaking capacity	65 kA 220...240 V AC 50/60 Hz IEC 60947-2 18 kA 500...525 V AC 50/60 Hz IEC 60947-2 35 kA 380...415 V AC 50/60 Hz IEC 60947-2 35 kA 440 V AC 50/60 Hz IEC 60947-2
[Uimp] rated impulse withstand voltage	8 kV IEC 60947-2
Trip unit technology	Thermal-magneticTM-D,
Continuous current rating	80 %
[Ui] rated insulation voltage	800 V IEC 60947-2
Trip unit name	TM-D
Suitability for isolation	Yes IEC 60947-2
Utilisation category	Category A
Mechanical durability	15000 cycles IEC 947-1 Annex K ed 5.2
Electrical durability	10000 cycles IEC 947-1 Annex K ed 5.2 440 V In
Connection pitch	1.06 in (27 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>AWG gauge</b>	AWG 6...AWG 2/0 fine stranded aluminium/copper AWG 14...AWG 3/0 rigid or stranded aluminium/copper
<b>Local signalling</b>	Presence of auxiliary contacts flag green)
<b>Mounting mode</b>	Clip-on 35 mm symmetrical DIN rail) By screws plate)
<b>Electrical connection</b>	Everlink lug, line Everlink lug, load
<b>Tightening torque</b>	44.3 lbf.in (5 N.m) 0.004...0.02 in <sup>2</sup> (2.5...16 mm <sup>2</sup> ) (AWG 14...AWG 4) 79.7 lbf.in (9 N.m) 0.04...0.1 in <sup>2</sup> (25...95 mm <sup>2</sup> ) (AWG 3...AWG 3/0)
<b>Number of slots</b>	1 auxiliary switch OF plug-in) 1 voltage release MN or MX plug-in) 1 alarm switch SD plug-in)
<b>Power wire stripping length</b>	0.8 in (20 mm)
<b>Color</b>	Gray RAL 7016)
<b>9 mm pitches</b>	9
<b>Height</b>	5.4 in (137 mm)
<b>Width</b>	3.2 in (81 mm)
<b>Depth</b>	3.1 in (80 mm)
<b>Net Weight</b>	2.368 lb(US) (1.074 kg)
<b>Quantity per Set</b>	Set of 1
<b>Circuit breaker application</b>	HACR rated

## Environment

<b>Quality labels</b>	CE
<b>Standards</b>	EN/IEC 60947-5-1 NEMA AB1 UL 489 CSA C22.2 No 5 NMX J-266 EN/IEC 60947-2 GB 14048.2
<b>Product certifications</b>	UL IEC CCC EAC CSA NOM
<b>IP degree of protection</b>	Front cover IP40 IEC 60529
<b>IK degree of protection</b>	IK07 conforming to IEC 62262
<b>Pollution degree</b>	3 IEC 60947-1
<b>Ambient Air Temperature for Operation</b>	-13...158 °F (-25...70 °C)
<b>Ambient Air Temperature for Storage</b>	-58...185 °F (-50...85 °C)
<b>Operating altitude</b>	6561.68 ft (2000 m) without derating 5000 m with derating

## Ordering and shipping details

<b>Category</b>	US10DE201131
<b>Discount Schedule</b>	ODE2
<b>GTIN</b>	3606481149435
<b>Returnability</b>	No

---

Country of origin US

## Packing Units

---

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.31 in (8.400 cm)
Package 1 Width	4.69 in (11.900 cm)
Package 1 Length	8.11 in (20.600 cm)
Package weight(Lbs)	2.599 lb(US) (1.179 kg)
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	18.739 lb(US) (8.500 kg)



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	336
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	WARNING: Cancer and Reproductive Harm - <a href="#">www.P65Warnings.ca.gov</a>
Halogen content performance	Halogen free product
PVC free	Yes


## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Technical Illustration

## Dimensions

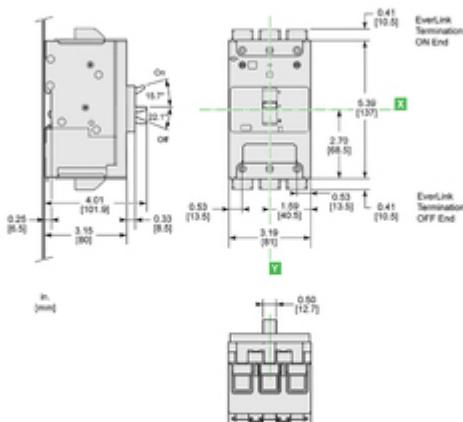

(L) TERMINATION OPTION - EverLink (ON end) | EverLink (OFF end)  
ALL DIMENSIONS ARE APPROXIMATE.  
ALSO REFER TO CAD, TECHNICAL DRAWINGS, AND DOCUMENTATION