

Product data sheet

Specifications



Ethernet TCP/IP network module,
Modicon M340 automation platform,
flash memory card, internal RAM 16
Mb, 1 x RJ45 10/100

BMXNOE0110

Main

Range of product	Modicon M340 automation platform
Product or component type	Ethernet TCP/IP network module
Concept	Transparent Ready
Integrated connection type	Ethernet TCP/IP RJ45 10/100 Mbit/s 1 twisted pair transparent ready class C30
Protective treatment	TC

Complementary

Communication service	Bandwidth management FDR server Rack Viewer SNMP network administrator Global Data I/O scanning Modbus TCP messaging Web server configurable Data Editor (via PC, pocket PC or PDA terminal) SOAP XML Web service (server)
Port Ethernet	10BASE-T/100BASE-TX
Memory description	Supplied Flash memory card (BMXRWSC016M) Internal RAM 16000 kB
Memory usage	User web page size: internal RAM Activating the standard web server: supplied Flash memory card (BMXRWSC016M) Application saving: supplied Flash memory card (BMXRWSC016M)
Supply	Internal power supply via rack
Marking	CE
Local signalling	1 LED (green) for activity on Ethernet network (ETH ACT) 1 LED (green) for processor running (RUN) 1 LED (green) for status of Ethernet network (ETH STS) 1 LED (red) for data rate (ETH 100) 1 LED (red) for memory card fault (CARD ERR) 1 LED (red) for processor or system fault (ERR)
Control type	RESET push-button cold restart
Current consumption	90 mA at 24 V DC
Module format	Standard
Net weight	0.2 kg

Environment

Ambient air temperature for operation	0...60 °C
Relative humidity	10...95 % without condensation
IP degree of protection	IP20

Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
-------------------	--

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.600 cm
Package 1 Width	11.500 cm
Package 1 Length	12.000 cm
Package 1 Weight	238.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.951 kg

Contractual warranty

Warranty	18 months
-----------------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint	114
----------------------------------	-----

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

REACH Regulation	REACH Declaration
------------------	-----------------------------------

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	--

Use Again

Repack and remanufacture


End of life manual availability	End of Life Information
---------------------------------	---

Take-back	No
-----------	----

Dimensions Drawings

Modules Mounted on Racks

Dimensions

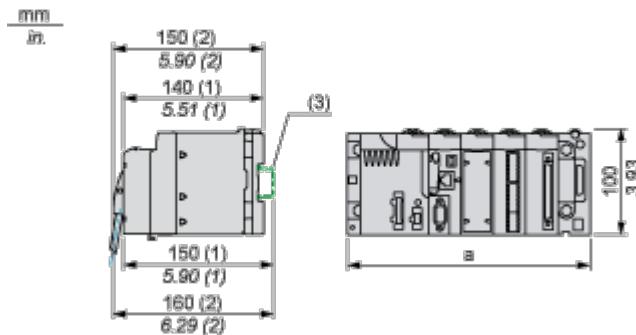

(1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative



