

Product data sheet

Specifications

SQUARE D



Transformer, dry type, DOE 2016, 112.5kVA, 3 phase, 480V delta primary, 208Y/120V secondary, 21M, 150C rise

EXN112T3H

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Square D
Product or Component Type	Transformer
Device short name	DOE 2016
Transformer type	Energy efficient
Device Application	Low voltage electrical distribution

Complementary

Box number	21M
Phase	3 phase
Rated operational power in VA	112.5 kVA
Network Frequency	60 Hz
type of cooling	Natural convection
Primary Voltage	480 V delta
Number of tap-offs	2 2.5 % FCAN 4 2.5 % FCBN
Primary operational current	135.32 A 312.27 A 112.5 kVA
Secondary voltage	208Y/120 V
Coil Material	Aluminium
Basic IMP level (BIL)	10 kV
Temperature Rise	150 °C 220 °C insulated
DOE Efficiency	98.66 % at 35 % load factor , 167 °F (75.0 °C)
Sound Level	47 dB 6 dB NEMA ST-20
%IZ	3.70 %
%IX	2.94 %
X/R Ratio	1.42
Inrush current	1939 A
Let Through Current	8.44 kA
Transformer Losses	222 no load (core loss) 2586 load loss (coil loss)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Transformer BTU/HR	1003 16.6 % 1309 25 % 2963 50 % 5721 75 % 9581 100 %
Height	37.5 in (953 mm)
Depth	28.4 in (722 mm)
Width	31.3 in (795 mm)
Net Weight	724.00 lb(US) (328.40 kg)
Mounting support	Floor Floor, with 7400FMB Ceiling, with 7400CMB21M
Degree of protection	UL type 2 UL type 3R, with 7400WS21M
Electrical connection	4 Hole Nema Pad primary 0.4 in (11.1 mm) 4 Hole Nema Pad secondary 0.4 in (11.1 mm) 6 Hole Nema Pad sec - XO 0.4 in (11.1 mm)
Number of mounting holes	4 Ø: 0.5 in (13 mm)

Environment

Ambient Air Temperature for Operation	104 °F (40 °C)
Average ambient air temperature for operation	30 °C
Standards	UL 1561 CSA C22.2 No 47 NEMA ST-20

Ordering and shipping details

Category	US1PE2X16256
Discount Schedule	PE2X
GTIN	785901357599
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	43.50 in (110.49 cm)
Package 1 Width	34.50 in (87.63 cm)
Package 1 Length	35.00 in (88.9 cm)
Package weight(Lbs)	748.007 lb(US) (339.29 kg)



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	33046
Environmental Disclosure	Product Environmental Profile
 Declare	Red list free

Use Better



Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl Glycidyl Ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No


Technical Illustration

Dimensions

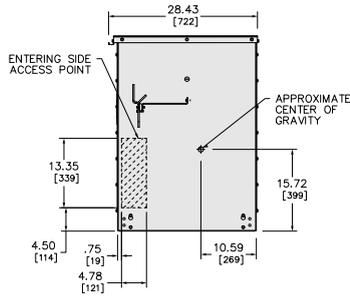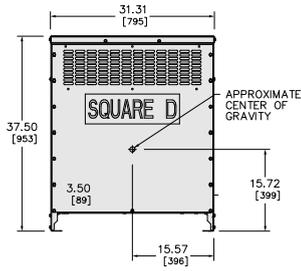

EXN112T3H

in.
[mm]

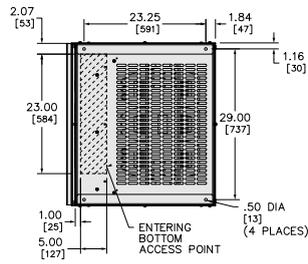

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND
DOCUMENTATION FOR COMPLETE INFORMATION.


Technical Illustration

Wiring diagram

IN EACH PHASE CONNECT TO TAPS	
PRIMARY VOLTS	2-2.5% FCAN 4-2.5% FCBN
504	1
492	2
480	3
468	4
456	5
444	6
432	7

NOTE: ACTUAL VOLTAGES &
NAMEPLATE VALUES MAY NOT
MATCH VOLTAGE IN TABLE

EXN112T3H

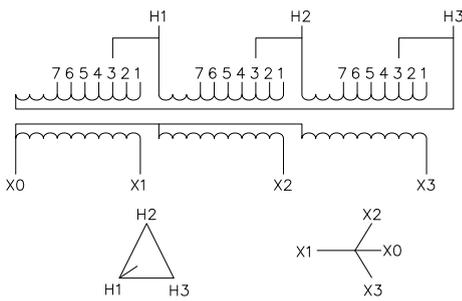

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR
COMPLETE INFORMATION.