

# Product data sheet

Specifications

## Linergy FT, Comb busbar for parallelling 2 contactors



GV3G264

### Main

Range	Linergy
Product name	FT
Device short name	GV3G
Product or component type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys Deca TeSys K TeSys U TeSys GV3
Product compatibility	GV3P LC1D40A...D65A GV3L
Number of tap-offs	2
[I <sub>th</sub> ] conventional free air thermal current	115 A
Connection pitch	64 mm

### Complementary

Fixing mode	Terminals:
[U <sub>i</sub> ] rated insulation voltage	690 V
Net weight	0.15 kg

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 cm
Package 1 Width	5.0 cm
Package 1 Length	12.0 cm
Package 1 Weight	154.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	30
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm

---

Package 2 Weight 4.836 kg

## Contractual warranty

---

Warranty 18 months



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	30
----------------------------------	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Compliant
-----------------------------------	-----------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	--

## Use Again

### Repack and remanufacture


End of life manual availability	<a href="#">End of Life Information</a>
---------------------------------	---

Take-back	No
-----------	----


WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
------------	---

Dimensions Drawings

Mounting of External Operator GV3APN01, GV3APN02 or GV3APN04 for Motor Circuit Breakers GV3L

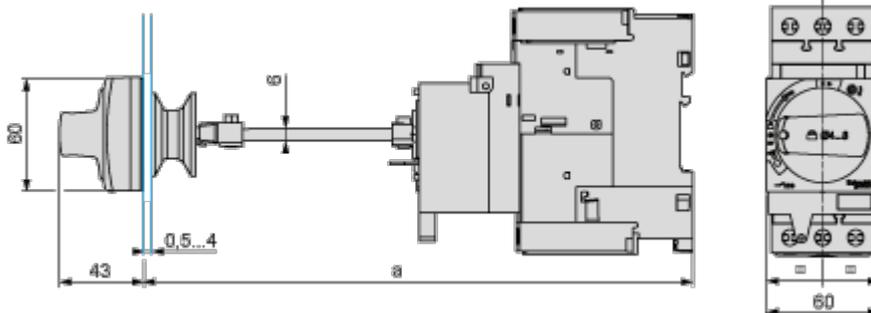


Door cut-out

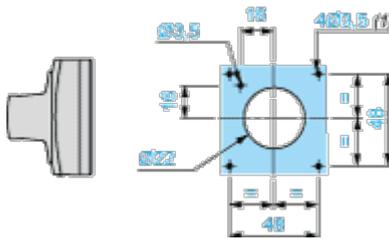


(1) For IP65 only.

Mounting of External Operator GVAPH03 for Motor Circuit Breakers GV3L

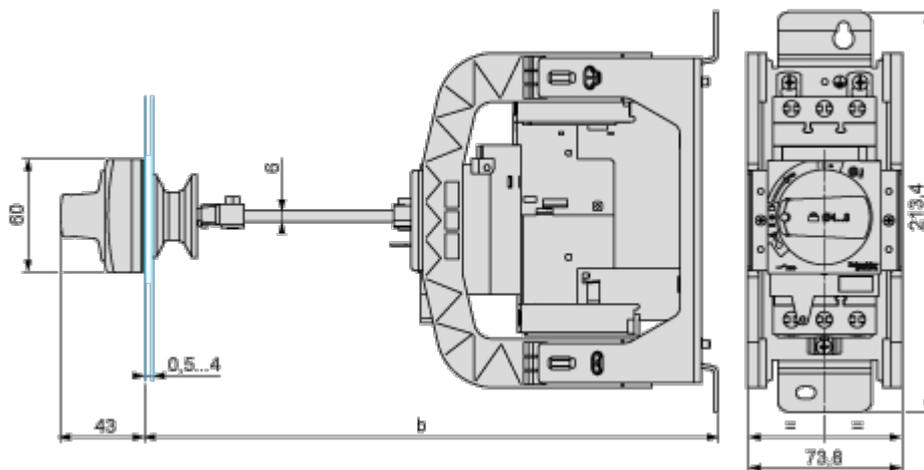

	b	
	Minimum	Maximum
GV3APN $\bullet\bullet$ + GVAPH03	200	300
GV3APN $\bullet\bullet$ + GVAPH03 + GVAPK12	300	492

Door cut-out

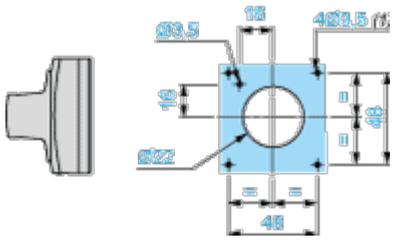

(1) For IP65 only.