

Product data sheet

Specifications



Power quality meter, PowerLogic PM8000, Standard, transducer and remote display, 512 MB, 256 s/c

METSEPM8214

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	PowerLogic
Product name	PowerLogic PM8000
Product or Component Type	Power meter
Device short name	PM8214
Market segment	Buildings large building cost management: billing: sub feeder Buildings small building network management: main incomer Buildings medium building network management: main incomer Buildings large building network management: main incomer Buildings large building network management: sub feeder Buildings multi-site network management: main incomer Buildings multi-site network management: sub feeder Data center network management: main incomer Data center network management: sub feeder Healthcare network management: main incomer Healthcare network management: sub feeder Industry network management: main incomer Industry network management: sub feeder Utility: sub feeder
model type	Standard

Complementary

Power quality analysis	EN 50160 2010 compliance report IEEE 519 2014 compliance report IEC 61000-4-30 class S power quality measurement up to the 63rd harmonic harmonic distortion waveform capture voltage sag and swell detection programmability (logic and math functions) IEC 62586 power quality monitoring disturbance direction detection rapid voltage change
Device Application	Power monitoring WAGES metering
Type of measurement	Current Voltage Frequency Active and reactive power total Apparent power total Power factor total Active and reactive power per phase, rms Apparent power per phase, rms Power factor per phase, rms
supply voltage	20...60 V DC +/- 10 %
Network Frequency	50 Hz 60 Hz

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Line Rated Current	5 A 1 A 10 A
Poles description	3P 1P + N 3P + N
Power Consumption in W	18 W
Display Type	Remote LCD display
Display Resolution	320 x 240 pixels QVGA
Sampling rate	256 samples/cycle
Measurement current	50...10000 mA
Analogue input type	Voltage (impedance 5 MOhm) Current (impedance 0.3 mOhm)
Measurement voltage	57...400 V AC 42...69 Hz between phase and neutral 100...690 V AC 42...69 Hz between phases
Frequency measurement range	42...69 Hz
Number of inputs	3 digital 30 V AC 3 digital 60 V DC
Measurement accuracy	Current +/- 0.1 % Voltage +/- 0.1 % Active energy +/- 0.2 %
Accuracy class	Class 0.2S active energy IEC 62053-22 Class 0.2 active energy ANSI C12.20 Class 0.2 active power IEC 61557-12 Class 0.5S reactive energy IEC 62053-24 Class 0.5 power factor IEC 61557-12 Class 0.2 voltage IEC 61557-12 Class 0.2 current IEC 61557-12
Number of Outputs	1 pulse
Information displayed	Voltage Current Frequency Power Energy consumption Harmonic distortion
Communication port protocol	Modbus RTU 115 kbauds - 2-wire ION 115 kbauds - 2-wire DNP3 IEC 61850 Modbus TCP/IP Ethernet Modbus TCP/IP daisy chain 10/100 Mbit/s RSTP 801.1d 2004
Communication port support	ETHERNET Screw terminal block RS485
Communication Network Type	IPv6 (internet protocol)
Data recording	Harmonics logs Waveform logs Trending/forecasting Event logs Alarm logs Data logs Sequence of event recording Sag and swell logs Min/max of instantaneous values Time stamping GPS synchronisation 50 data recorders
Memory capacity	512 MB

Web services	<ul style="list-style-type: none"> Customizable home page File upload/download via FTP File upload/download via SFTP Web server Alarm notification by e-mail Viewing of captured waveform (FTP) Viewing of captured waveform (web) HTTPS server
Communication Service	<ul style="list-style-type: none"> RSTP support DHCP SMTP e-mail notification NTP time synchronization SNMP PTP time synchronization
Cybersecurity	<ul style="list-style-type: none"> Enable/disable communication ports Robust security logs Port hardening Password protection Syslog protocol support
Mounting Mode	<ul style="list-style-type: none"> Clip-on Flush-mounted
Mounting support	<ul style="list-style-type: none"> DIN rail meter device Framework remote display
Provided Equipment	<ul style="list-style-type: none"> Remote display
Installation category	III
Safety Construction	<ul style="list-style-type: none"> III400...690 V conforming to IEC 61010-1:ed. 3 III400...690 V conforming to EN 61010-1:ed. 3 III347...600 V conforming to UL 61010-1:ed. 3 III347...600 V conforming to CSA C22.2 No 61010-1:ed. 3
Standards	<ul style="list-style-type: none"> IEC 61557-12 IEC 62052-11 IEC 62053-24 IEC 62053-22 IEEE 1588 IEC 62586-2 IEC 61326-1
Product certifications	<ul style="list-style-type: none"> CE CULus N998
Width	3.6 in (90.5 mm)
Depth	3.6 in (90.8 mm)
Height	3.6 in (90.5 mm)
Net Weight	18.6 oz (528 g)

Environment

Electromagnetic compatibility	<ul style="list-style-type: none"> Electrostatic discharge conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test conforming to IEC 61000-4-4 Surge immunity test conforming to IEC 61000-4-5 Conducted RF disturbances conforming to IEC 61000-4-6 Magnetic field at power frequency conforming to IEC 61000-4-8 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11 Immunity to impulse waves conforming to IEC 61000-4-12 Conducted and radiated emissions conforming to EN 55022 Conducted and radiated emissions conforming to EN 55011 Conducted and radiated emissions conforming to FCC part 15 Conducted and radiated emissions conforming to ICES-003 Conducted RF disturbances (2...150 Hz) conforming to CLC/TR 50579 Surge withstand conforming to IEEE C37.90.1
IP degree of protection	IP30 conforming to IEC 60529
Relative humidity	5...95 %

Ambient air temperature for operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Operating altitude	9842.52 ft (3000 m)

Ordering and shipping details

Category	US10PL109797
Discount Schedule	0PL1
GTIN	3606481384560
Returnability	No
Country of origin	CA

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.5 in (14 cm)
Package 1 Width	5.5 in (14 cm)
Package 1 Length	14.6 in (37 cm)
Package weight(Lbs)	3.168 lb(US) (1.437 kg)
Unit Type of Package 2	S03
Number of Units in Package 2	4
Package 2 Height	11.8 in (30 cm)
Package 2 Width	11.8 in (30 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	13.644 lb(US) (6.189 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	16
Package 3 Height	17.7 in (45 cm)
Package 3 Width	31.5 in (80 cm)
Package 3 Length	23.6 in (60 cm)
Package 3 Weight	73.317 lb(US) (33.256 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

SCIP Number

03520ddb-79bb-4c6d-89b9-5e4182b3a577

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

[Circularity Profile](#)

[End of Life Information](#)

Take-back

No


WEEE Label

 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Approximate Dimensions

PM8000 DIN Rail Mount Meter

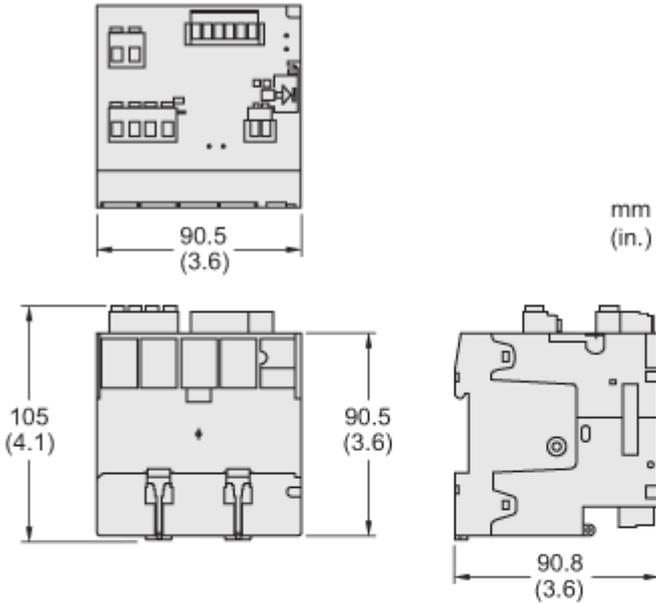

PM8000 Remote Display

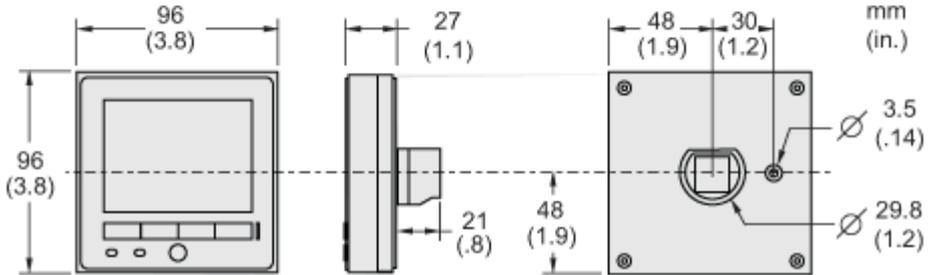


Image of product / Alternate images

Alternative

