


NSYTRR22TB

Terminal block, spring type, Linergy TR,
Removable carrier disconnect, 2 points, 4mm²,
grey

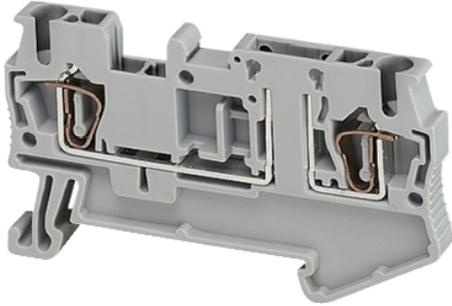

Main

Range	Linergy
Product name	Linergy TR
Product or Component Type	Terminal block
Device short name	TRR
Terminal block type	Removable carrier disconnect
Associated connection component	Blade Diode Cylindrical fuse
Terminal block level	1
Mounting Mode	Clip-on
Nominal cross section	0.004 in ² (2.5 mm ²)
Length	2.4 in (60.5 mm)
Color	Gray
Quantity per Set	Set of 50

Complementary

Fuse size	5 x 20 mm 6 x 32 mm
Width	0.2 in (5.2 mm)
Height	1.4 in (36.5 mm)
Connections - terminals	1 x spring terminal upstream 1 x spring terminal downstream
Number of connections	2
Connection position	Top
Number of measurement input	2
Cable cross section	0.0001...0.004 In ² (0.08...2.5 mm ²), flexible without cable end 0.001...0.006 in ² (0.8...4 mm ²), solid
Wire stripping length	0.4 in (10 mm)
Tool type	Disconnection flat screwdriver Connection flat screwdriver
[Ue] rated operational voltage	400 V EN/IEC 60947-7-1 300 V cURus 300 V CSA
Line Rated Current	20 A EN/IEC 60947-7-1 16 A CSA 16 A cURus
Material	Polyamide 6/6: insulating case
Dielectric loss	0.01 at 1 MHz IEC 60250 0.01 at 1 MHz VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 MΩ.M IEC 60093 10000 MΩ.m VDE 0303-T30
Surface resistance	1000 GΩ IEC 60093 1000 GΩ VDE 0303-T30
Creep resistance	500 CTI (> 400 kV) IEC 60093 500 CTI (> 400 kV) VDE 0303-T30
Flame retardance	V0 0.03 in (0.8 mm) UL 94
Net Weight	0.3 oz (7.7 g)

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product Compatibility	Spacial enclosures

Environment

Product Certifications	cURus[RETURN]EAC[RETURN]CSA
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...266 °F (-40...130 °C) IEC 60216-1 -40...266 °F (-40...130 °C) VDE 0304-T21

Ordering and shipping details

Category	US10CP521715
Discount Schedule	0CP5
GTIN	3606480532955
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.8 in (4.5 cm)
Package 1 Width	2.8 in (7.0 cm)
Package 1 Length	10.6 in (27.0 cm)
Package 1 Weight	0.2 oz (7.0 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	50
Package 2 Height	1.8 in (4.5 cm)
Package 2 Width	2.8 in (7.0 cm)
Package 2 Length	10.6 in (27.0 cm)
Package 2 Weight	13.4 oz (380.0 g)
Unit Type of Package 3	S02
Number of Units in Package 3	650
Package 3 Height	5.9 in (15.0 cm)
Package 3 Width	11.8 in (30.0 cm)
Package 3 Length	15.7 in (40.0 cm)
Package 3 Weight	11.782 lb(US) (5.344 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
Halogen content performance	Halogen free plastic parts product