

Product data sheet

Specifications



Discrete Output Module + Base, 8 Out, 24V DC, 2A, Source, Protected, External Supply, 1 Wire, Modicon Edge I/O NTS

NTSDDO0802K

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Edge I/O NTS
Product or Component Type	Discrete output module kit
Kit composition	NTSDDO0802 module NTSXBA0100H base
Mandatory accessory	NTSXTB12_0_H terminal block
Product Compatibility	NTSN.....
Range Compatibility	Logic/motion controller - Modicon M262 Modicon M580 Third party
Device Application	Industrial Application
Discrete output number	8
Group of output channels	2 groups of 4 channels
Discrete output logic	Positive logic (source)
Discrete output voltage	24 V DC
Operating Mode	Synchronous/Isochronous

Complementary

Discrete output type	8 transistor
Output wiring mode	1 wire
Discrete output current	2 A per channel 4 A per group 8 A per module
Discrete output frequency	1 kHz for resistive load 0.5/LI² Hz for inductive load
Response time on output	90 µs maximum (turn on) 110 µs maximum (turn off)
Maximum leakage current	0.001 mA per channel
Maximum voltage drop	<0.25 V per channel DC
Maximum tungsten load	<12 W
Output protection type	Transient voltage suppression per channel Short circuit protection per channel Overload/thermal protection per channel
Output diagnostic	External power supply error per channel Over current error per channel
Power supply type	Bus power from power supply bus (24 Vdc) Field power from external power supply (24 Vdc)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Rated operational voltage limits	20.4...28.8 V DC
Typical current consumption	33.6 mA 24 V DC on the Bus current 0 mA 24 V DC on the internal field current
Power dissipation in W	1.68 W maximum at 24 V DC
Isolation between channels and bus	1500 V AC
Isolation between channels and ground	1500 V AC
Hot swapping fallback	Yes
Local signalling	1 LED (green) for module operating (RUN) 1 LED per channel (green) for channel diagnostic 1 LED (red) for module error (ERR)
Housing Colour	Grey
Mounting support	Top hat type TH35-7.5 IEC 60715 Top hat type TH35-15 IEC 60715
Height	3.9 in (100 mm)
Width	0.6 in (15 mm)
Depth	3.1 in (80 mm)
Product Weight	0.159 lb(US) (0.072 kg)

Environment

IP Degree of Protection	IP20
Marking	CE UKCA CULus RCM
Product certifications	CE UKCA CULus RCM Merchant Navy - EU RO MR (pending) EAC (pending) ATEX Zone 2 (pending) IECEx zone 2 (pending) CCC Ex zone 2 (pending)
Standards	EN/IEC 61131-2 EN 61010-2-201 UL 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G EN/IEC 60079-0 EN 50155 EN 50121-4 EN 50121-5
Directives	2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive 2014/35/EU
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	5...95 % without condensation
Operating altitude	0...6561.68 ft (0...2000 m) without derating 2000...5000 m with derating
pollution degree	2
Vibration resistance	1 g without accessory 2 g with accessory

Shock resistance	15 g 11 ms with and without accessory)
------------------	--

Ordering and shipping details

Category	US1PC3318213
Discount Schedule	PC33
GTIN	3606486877692
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.10 in (2.800 cm)
Package 1 Width	3.35 in (8.500 cm)
Package 1 Length	4.72 in (12.000 cm)
Package 1 Weight	3.527 oz (100.000 g)
Unit Type of Package 2	S01
Number of Units in Package 2	16
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	5.91 in (15.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	4.193 lb(US) (1.902 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	28
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

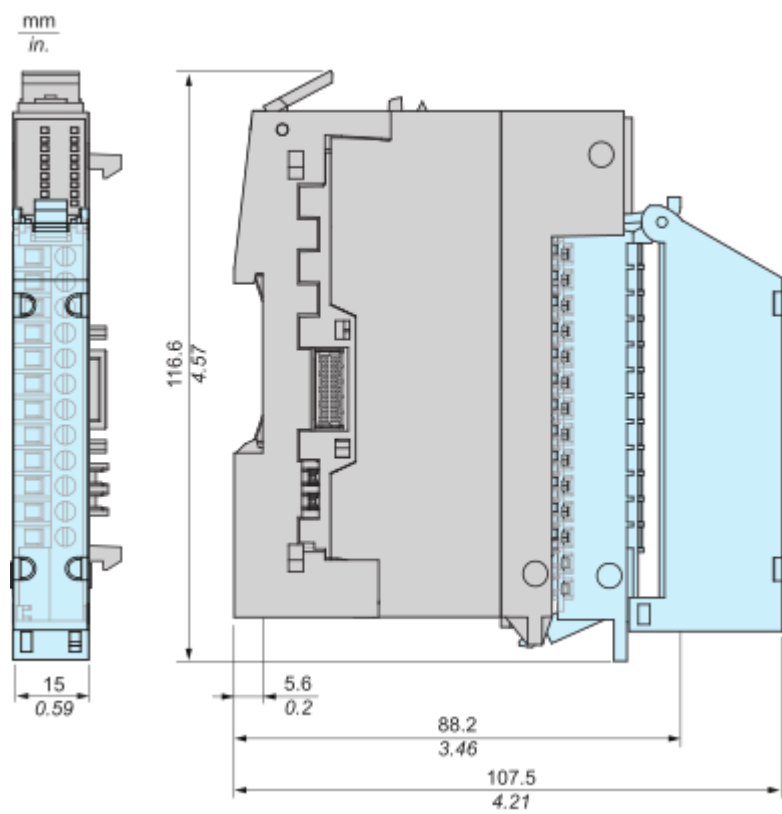

Mounting and Clearance

Minimum clearances

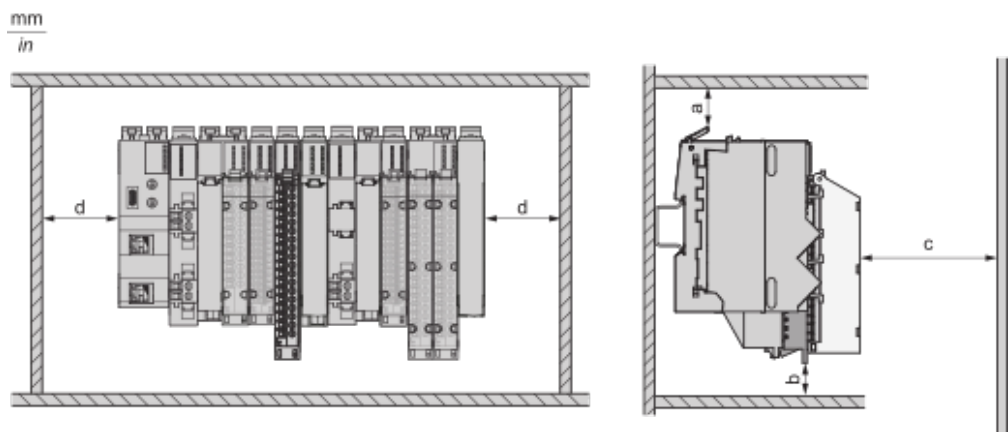


a : 50 mm (1.97 in) **b** : Without EMC kit: 25 mm (0.98 in), with EMC 55 kit: 55 mm (2.16 in) **c** : 80 mm (3.15 in) **d** : 25 mm (0.98 in)

Connections and Schema


Wiring

2-wire or 3-wire connection

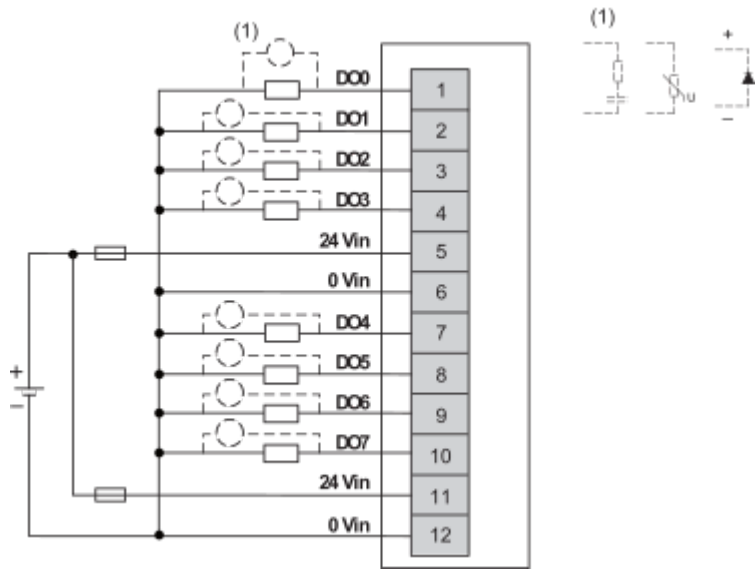

Technical Illustration

Dimensions

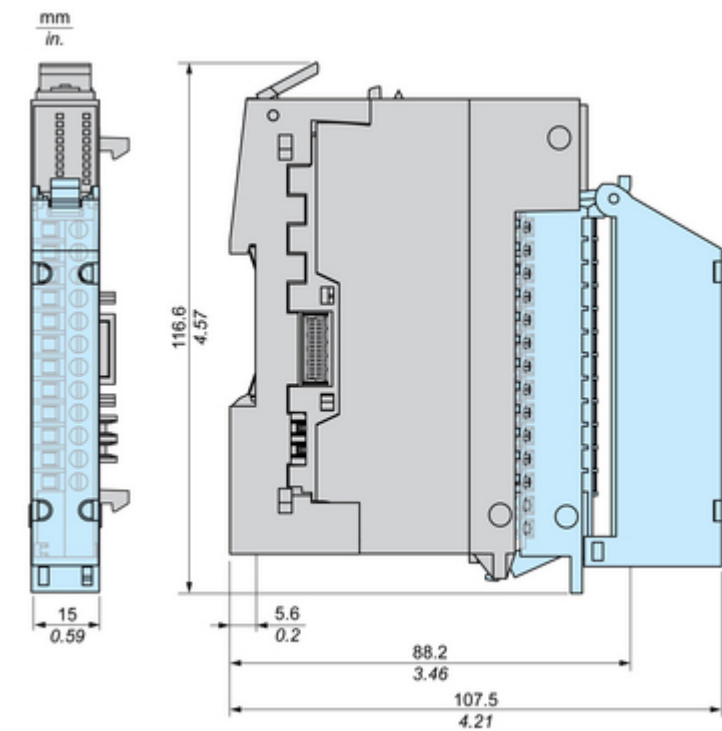

Technical Illustration

Wiring diagram

2-wire or 3-wire connection

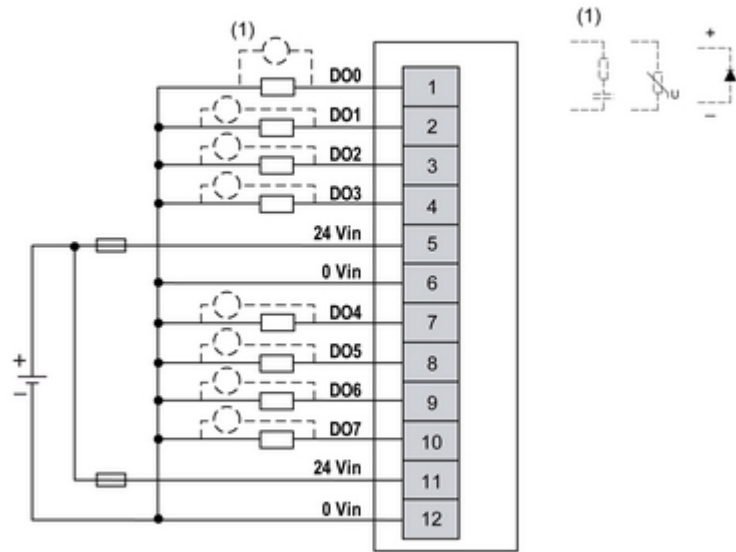


Image of product / Alternate images

Alternative

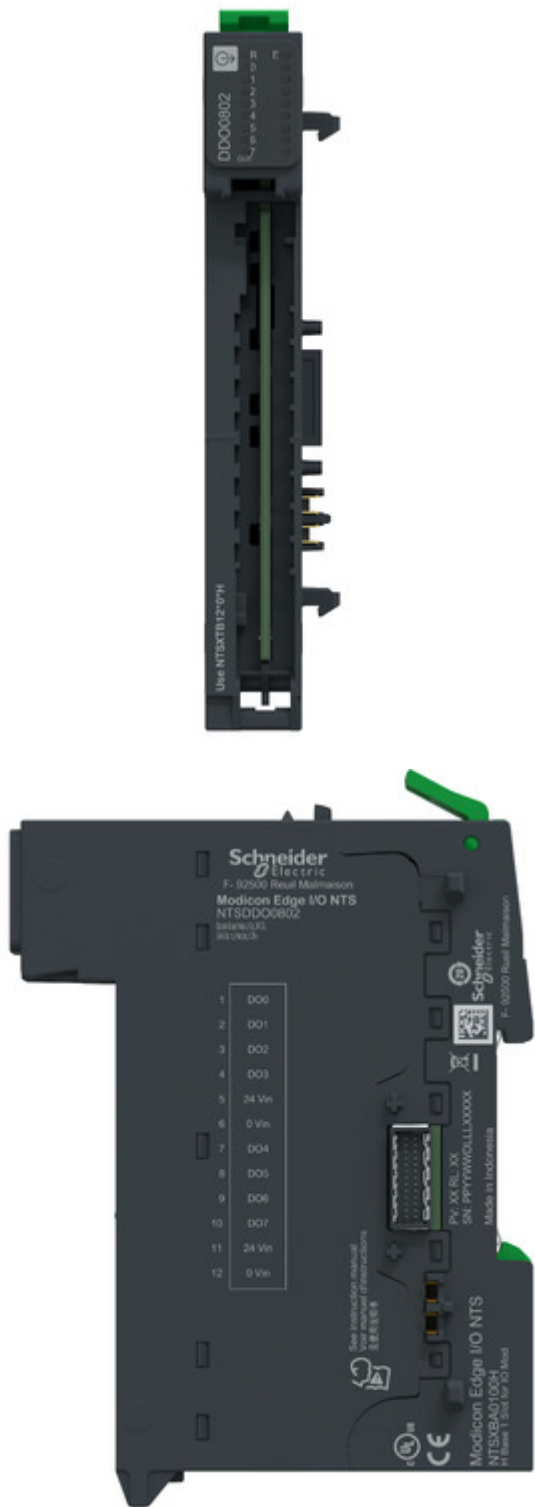






Image of product in real life situation

