


# Product data sheet

Specifications

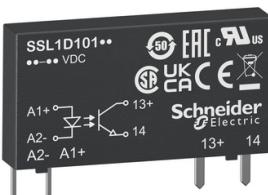

plug in relay, Harmony Solid State  
Slim Relays, 0.1A, DC switching,  
input 16 to 30V DC, output 1 to 48V  
DC

SSL1D101BD

**Product availability:** Stock - Normally stocked in distribution facility

## Main

Range of Product	Harmony Solid State Relays
Device short name	SSL
Product or Component Type	Plug-in relay
Phase	1 phase
[Uc] control circuit voltage	16...30 V
Output switching mode	DC switching
Ui rated insulation voltage	48 V
Insulation resistance	> 100 MOhm 500 V DC
Electromagnetic compatibility	Electrostatic discharge - test level: 4 kV criteria B (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV criteria B (air discharge) conforming to IEC 61000-4-2 Conducted RF disturbances - test level: 10 V criteria A (0.15...80 MHz) conforming to IEC 61000-4-6 Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m criteria A (80 MHz to 1 GHz) conforming to IEC 61000-4-3 Radiated radio-frequency electromagnetic field immunity test - test level: 3 V/m criteria A (1.4...6 GHz) conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test - test level: 2 kV criteria B (5 kHz) conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV criteria B (5 kHz) conforming to IEC 61000-4-4 Surge immunity test - test level: 0.5 kV criteria B (line to line) conforming to IEC 61000-4-5 Surge immunity test - test level: 1 kV criteria B (line to earth) conforming to IEC 61000-4-5 Radiated emission - test level: 30...1000 MHz conforming to IEC 60947-1 Conducted emission - test level: 0.15...30 MHz conforming to IEC 60947-1
[Uiimp] rated impulse withstand voltage	5.3 kV for input to case IEC 62314 5.3 kV for input/output circuit IEC 62314 5.3 kV for input/output circuit UL 508 5.3 kV output to case 5.3 kV output to case IEC 62314 5.3 kV for input to case UL 508 5.3 kV output to case UL 508

## Complementary

Mounting Support	Socket
Line Rated Current	0.1 A
Output voltage	1...48 V DC
[Uc] control circuit voltage	16...30 V DC
Capacitance unbalance	2.5 pF input/output

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Minimum switching voltage	16 V DC turn-on
Maximum switching voltage	9 V DC turn-off
Input current	5 mA
Input impedance	4500 Ohm
Solid state output type	DC switching Transistor output
Load current	0.001...0.1 A
Transient Overvoltage	60 V
Maximum operating frequency	500 Hz
Surge current	0.3 A 10 ms
Maximum voltage drop	<1 V on-state
Maximum leakage current	0.001 mA off-state
Response time	0.02 ms (turn-on) 0.13 ms (turn-off)
Overvoltage category	III
Width	0.2 in (5 mm)
Height	1.1 in (28 mm)
Depth	0.6 in (15 mm)
Net Weight	0.0090 lb(US) (0.0041 kg)
Device presentation	Complete product

## Environment

Flame retardance	V0 conforming to UL 94
Dielectric strength	3750 V for input/output
Pollution degree	2
Standards	IEC/EN 60947-1 IEC/EN 62314 UL 508 C22.2 No. 14
Product Certifications	cURus CSA EAC CE UKCA
Marking	CE
IP degree of protection	IP00
Ambient Air Temperature for Operation	-4...176 °F (-20...80 °C)
Ambient Air Temperature for Storage	-4...185 °F (-20...85 °C)

## Ordering and shipping details

Category	US10CP222375
Discount Schedule	OCP2
GTIN	3606480579684
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.28 in (0.700 cm)
Package 1 Width	0.98 in (2.500 cm)
Package 1 Length	14.57 in (37.000 cm)
Package weight(Lbs)	0.141 oz (4.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	12
Package 2 Height	0.28 in (0.700 cm)
Package 2 Width	0.98 in (2.500 cm)
Package 2 Length	14.57 in (37.000 cm)
Package 2 Weight	2.187 oz (62.000 g)
Unit Type of Package 3	S01
Number of Units in Package 3	1080
Package 3 Height	5.91 in (15.000 cm)
Package 3 Width	5.91 in (15.000 cm)
Package 3 Length	15.75 in (40.000 cm)
Package 3 Weight	12.531 lb(US) (5.684 kg)



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO<sub>2</sub> eq, Total Life cycle) **3**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Pro-active compliance (Product out of EU RoHS legal scope)**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)**


## Use Again

### Repack and remanufacture


Take-back **No**

## Dimensions Drawings

## Dimensions

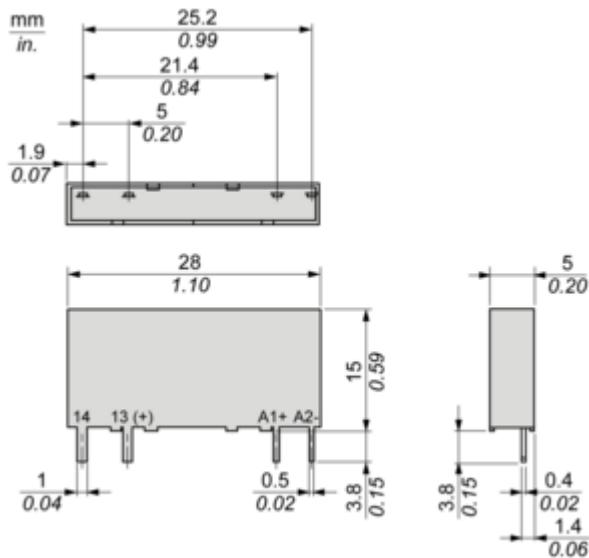


## Mounting and Clearance

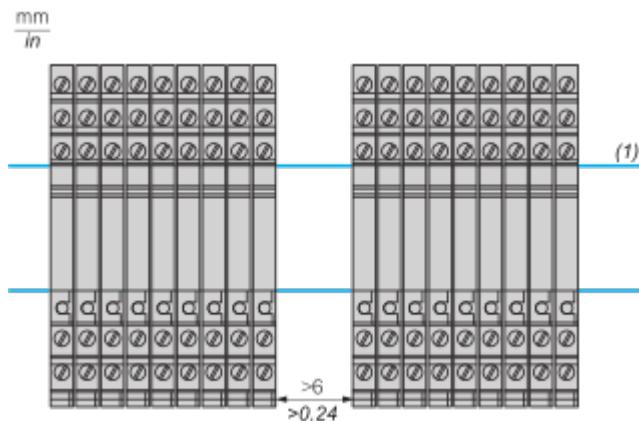Mounting

**(1)** : DIN Rail Mount

## Performance Curves

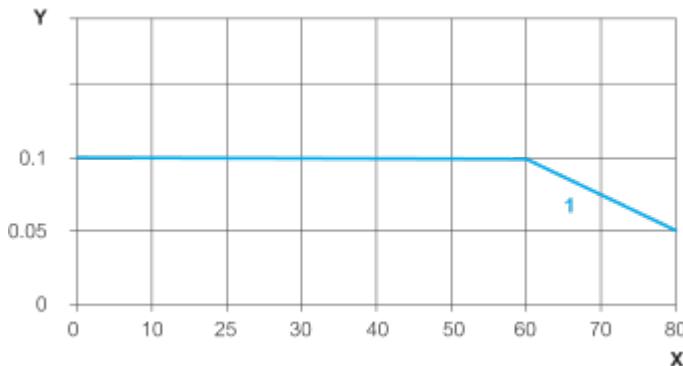
Derating Curves

X : Ambient Temperature (°C)

Y : Load Current (Amperes)

1 : Same derating curve when installed single unit with 6.2 mm gap and multiple unit with no gap.

## Connections and Schema

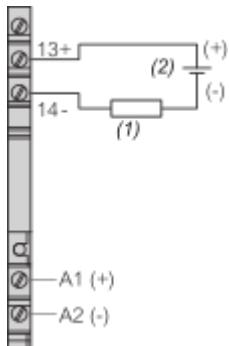Wiring

(1) Load

(2) DC Source

## Technical Illustration

## Dimensions

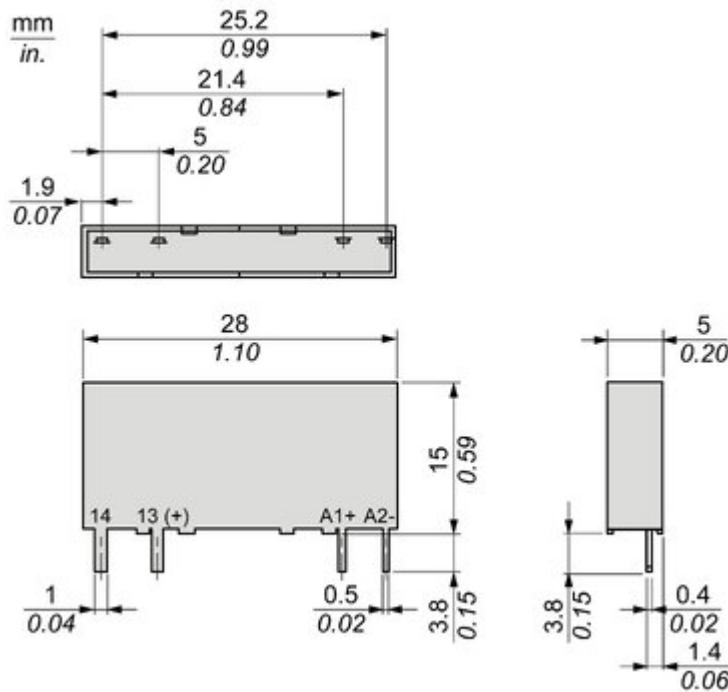
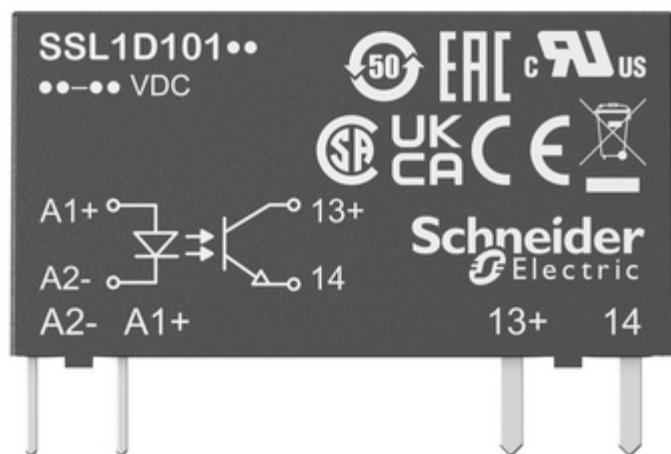



Image of product / Alternate images


Alternative

---





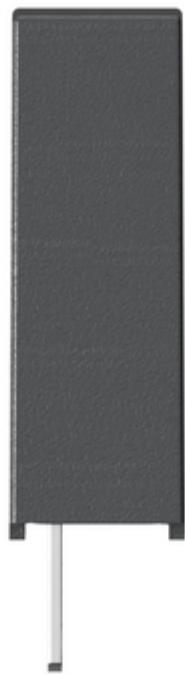

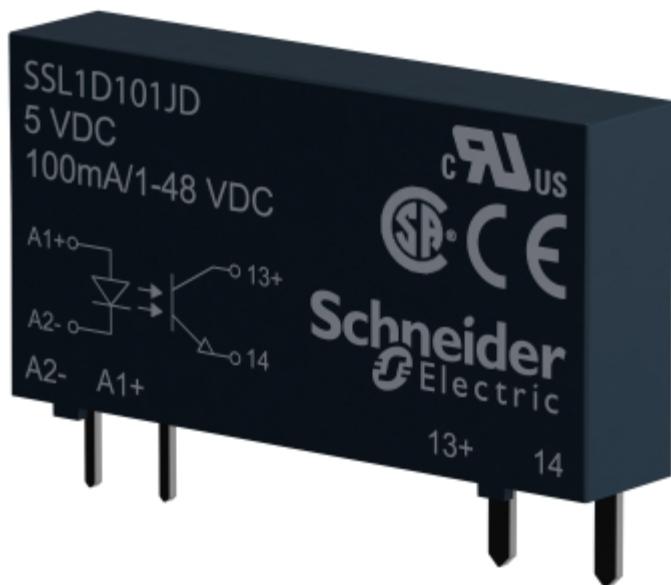

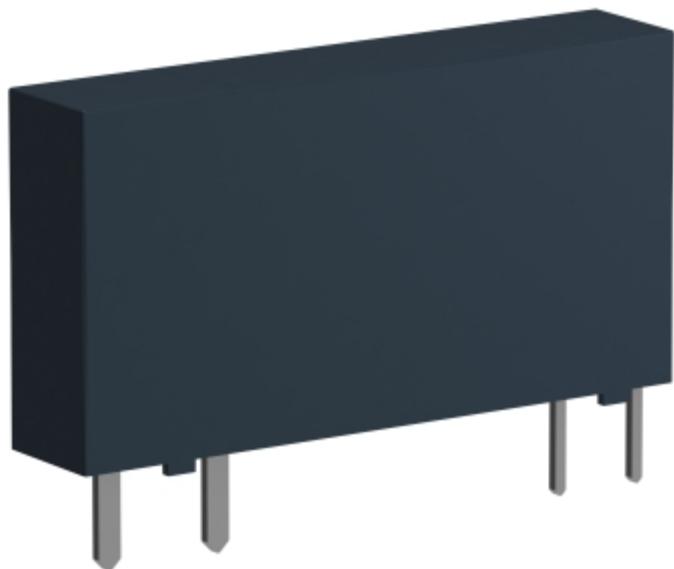


Image of product in real life situation

