

Product data sheet

Specifications



Die cast empty control station,
Harmony XAP, XB2 SL, zinc alloy,
grey, 1 cut out, 22mm,
80x80x51.5mm

XAPG19201

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XAP
Product or Component Type	Die-cast empty control station
Device short name	XAPG
Product destination	For Ø 22 mm control and signalling units
Number of cut-out	1 cut-out
Colour of base of enclosure	Grey RAL 7032)
Colour of cover	Grey RAL 7032)
Control station type	Metal
Material	Die cast zinc
Sale per indivisible quantity	1
IP degree of protection	IP65 IEC 60529 IP657 IEC 60529
Resistance to chemical agents	Special treatment can be obtained on request

Complementary

Number of vertical rows	1
Number of horizontal rows	1
Cut-out dimensions	Ø 22 mm
Cable entry	cable gland 1 x cable gland
Thread type	3/4 NPT
CAD overall width	3.1 in (80 mm)
CAD overall height	3.1 in (80 mm)
CAD overall depth	2.03 in (51.5 mm)
Net Weight	1.155 lb(US) (0.524 kg)
Compatibility code	XAPG

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Electrical shock protection class	Class I conforming to IEC 60536 Class I conforming to NF C 20-030
IK degree of protection	IK07 IEC 62262

Ordering and shipping details

Category	US10CS222475
Discount Schedule	OCS2
GTIN	3389118381926
Returnability	Yes
Country of origin	MA

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.386 in (8.600 cm)
Package 1 Width	3.543 in (9.000 cm)
Package 1 Length	3.543 in (9.000 cm)
Package weight(Lbs)	18.695 oz (530.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	12
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	14.991 lb(US) (6.800 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	4
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Offer Marketing Illustration

Product benefits / Features

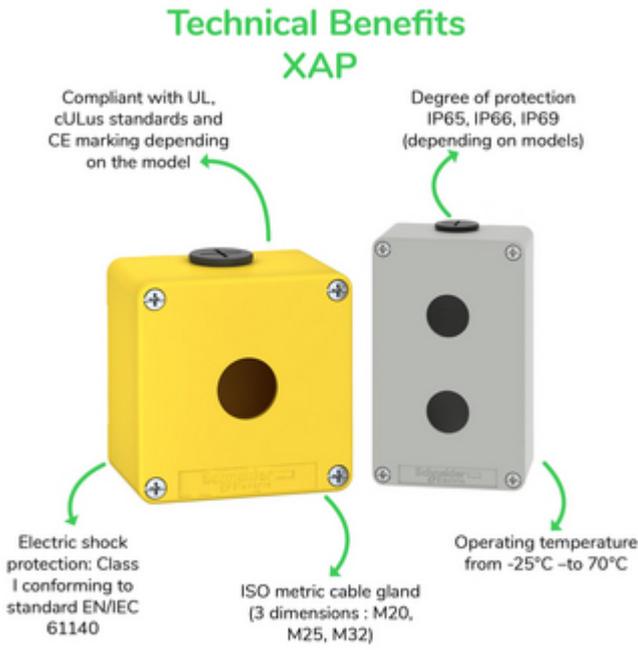

Offer Marketing Illustration

Product benefits / Features

Features XAP

- Empty stations for customer assembly with 1 to 10 holes depending on the model
- Metal offer for use in a wide range of environments
- Operating simplicity, flexibility, and robustness
- Full compatibility with Harmony XB4 or Harmony XB5 pushbutton ranges
- Pre-drilled or undrilled zinc or aluminium alloy enclosures

Image of product / Alternate images

Alternative



