



Circuit breaker Universal current 440 V DC 400 V AC 10kA, 2-pole, C, 01A

| Model   |                                      |
|---|--------------------------------------|
| product brand name  | SENTRON                              |
| product designation   | Miniature circuit breaker            |
| General technical data  |                                      |
| number of poles   | 2                                    |
| design of pole  | 2P                                   |
| tripping characteristic class   | C                                    |
| mechanical service life (operating cycles) typical                                  | 10 000                               |
| overvoltage category  | III                                  |
| degree of pollution   | 3                                    |
| Voltage   |                                      |
| type of voltage of the operating voltage  | AC/DC                                |
| <b>insulation voltage (Ui)</b>  |                                      |
| • at DC rated value   | 250 V                                |
| • with single-phase operation at AC rated value                                     | 440 V                                |
| • with multi-phase operation at AC rated value                                      | 440 V                                |
| operational current   |                                      |
| • at 40 °C rated value  | 0.95 A                               |
| • at 50 °C rated value  | 0.9 A                                |
| • at 55 °C rated value  | 0.88 A                               |
| • at 60 °C rated value  | 0.85 A                               |
| • at AC rated value   | 1 A                                  |
| Supply voltage  |                                      |
| supply voltage  |                                      |
| • at AC   | 400 V                                |
| • at DC rated value   | 440 V                                |
| value range of the supply voltage frequency   | 50/60 Hz                             |
| operating voltage at DC rated value maximum   | 500 V                                |
| Protection class  |                                      |
| protection class IP   | IP20, with connected conductors      |
| Breaking Capacity   |                                      |
| switching capacity current  |                                      |
| • at DC according to IEC 60947-2 rated value  | 15 kA                                |
| • according to EN 60898 rated value   | 10 kA                                |
| energy limitation class   | 3                                    |
| Dissipation   |                                      |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 1.2 W                                |
| suitability for operation   | Infrastructure / Industry / Mobility |
| Product details   |                                      |

|  |  |
|--|--|
| product feature touch protection   | Yes  |
| product component  |  |
| • combined terminal top  | Yes  |
| • combined terminal bottom   | Yes  |
| • neutral conductor switching  | No   |
| <b>product feature</b>   |  |
| • properties for main switches in accordance with EN 60204-1                 | Yes  |
| • halogen-free   | Yes  |
| • sealable   | Yes  |
| • silicon-free   | Yes  |
| product extension installable supplementary devices                          | Yes  |
| <b>Short circuit</b>   |  |
| short-circuit current breaking capacity (Icn)                                |  |
| • at DC according to EN 60898-2  | 10 kA  |
| <b>Connections</b>   |  |
| connectable conductor cross-section solid                                    |  |
| • minimum  | 0.75 mm <sup>2</sup>                                 |
| • maximum  | 35 mm <sup>2</sup>                                   |
| connectable conductor cross-section stranded                                 |  |
| • minimum  | 0.75 mm <sup>2</sup>                                 |
| • maximum  | 35 mm <sup>2</sup>                                   |
| connectable conductor cross-section finely stranded with core end processing |  |
| • minimum  | 0.75 mm <sup>2</sup>                                 |
| • maximum  | 25 mm <sup>2</sup>                                   |
| AWG number as coded connectable conductor cross section                      |  |
| • minimum  | 18   |
| • maximum  | 4  |
| tightening torque [lbf·in] with screw-type terminals                         |  |
| • minimum  | 22 lbf·in  |
| • maximum  | 31 lbf·in  |
| tightening torque with screw-type terminals                                  |  |
| • minimum  | 2.5 N·m  |
| • maximum  | 3.5 N·m  |
| position of power supply cord  | AC as required, observe DC polarity                  |
| <b>Mechanical Design</b>   |  |
| height   | 90 mm  |
| width  | 36 mm  |
| depth  | 76 mm  |
| installation depth   | 70 mm  |
| number of modular width units  | 2  |
| <b>fastening method</b>  | Quick assembly system                                |
| mounting position  | any  |
| net weight   | 326 g  |
| <b>Environmental conditions</b>  |  |
| standard   | IEC / EN 60898-2, UL1077                             |
| vibration resistance according to IEC 60068-2-6                              | ±1mm at 5 to 25Hz; 50m/s <sup>2</sup> at 25 to 150Hz |
| ambient temperature during operation   |  |
| • minimum  | -40 °C   |
| • maximum  | 70 °C  |
| ambient temperature during storage   |  |
| • minimum  | -40 °C   |
| • maximum  | 75 °C  |
| number of test cycles for environmental testing according to IEC 60068-2-30  | 6  |
| <b>Approvals Certificates</b>  |  |
| <b>General Product Approval</b>  |  |



EG-Konf.

[Confirmation](#)



CCC



UR



VDE

|                          |                   |                   |       |
|--------------------------|-------------------|-------------------|-------|
| General Product Approval | Test Certificates | Marine / Shipping | other |
|--------------------------|-------------------|-------------------|-------|

[Miscellaneous](#)



[Miscellaneous](#)

[Special Test Certificate](#)



LRS

[Miscellaneous](#)

|       |         |                 |             |
|-------|---------|-----------------|-------------|
| other | Railway | Dangerous goods | Environment |
|-------|---------|-----------------|-------------|

[Confirmation](#)

[Special Test Certificate](#)

[Confirmation](#)

[Transport Information](#)



[Environmental Confirmations](#)

|             |
|-------------|
| Environment |
|-------------|

[Environmental Confirmations](#)

|                     |
|---------------------|
| Further information |
|---------------------|

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SY5201-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SY5201-7>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SY5201-7](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY5201-7)

CAx-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>



# CB

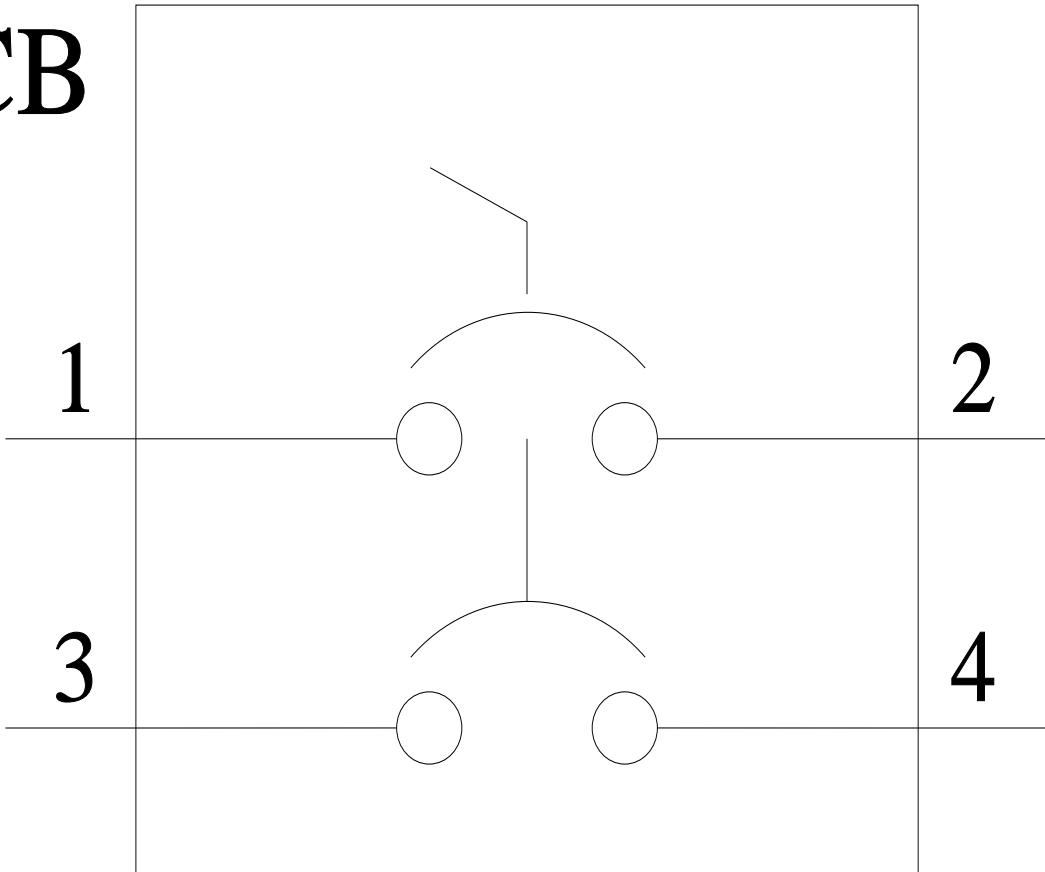

last modified:

7/18/2024 

