



power contactor, AC-3e/AC-3, 51 A, 22 kW / 400 V, 3-pole, 24 V DC, 0.8-1.2\* Us, with integrated varistor, auxiliary contacts: 2 NO + 2 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2, suitable for PLC outputs, captive auxiliary switch

|                                                                                                              |                                                            |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| product brand name                                                                                           | SIRIUS                                                     |
| product designation                                                                                          | Coupling contactor                                         |
| product type designation                                                                                     | 3RT2                                                       |
| <b>General technical data</b>                                                                                |                                                            |
| size of contactor                                                                                            | S2                                                         |
| product extension                                                                                            |                                                            |
| • function module for communication                                                                          | No                                                         |
| • auxiliary switch                                                                                           | No                                                         |
| power loss [W] for rated value of the current                                                                |                                                            |
| • at AC in hot operating state                                                                               | 12 W                                                       |
| • at AC in hot operating state per pole                                                                      | 4 W                                                        |
| • without load current share typical                                                                         | 1 W                                                        |
| type of calculation of power loss depending on pole                                                          | quadratic                                                  |
| insulation voltage                                                                                           |                                                            |
| • of main circuit with degree of pollution 3 rated value                                                     | 690 V                                                      |
| • of auxiliary circuit with degree of pollution 3 rated value                                                | 690 V                                                      |
| surge voltage resistance                                                                                     |                                                            |
| • of main circuit rated value                                                                                | 6 kV                                                       |
| • of auxiliary circuit rated value                                                                           | 6 kV                                                       |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                                                      |
| shock resistance at rectangular impulse                                                                      |                                                            |
| • at DC                                                                                                      | 6.1g / 5 ms, 3.7g / 10 ms                                  |
| shock resistance with sine pulse                                                                             |                                                            |
| • at DC                                                                                                      | 9.6g / 5 ms, 5.8g / 10 ms                                  |
| mechanical service life (operating cycles)                                                                   |                                                            |
| • of contactor typical                                                                                       | 10 000 000                                                 |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                                                  |
| • of the contactor with added auxiliary switch block typical                                                 | 10 000 000                                                 |
| reference code according to IEC 81346-2                                                                      | Q                                                          |
| Substance Prohibitation (Date)                                                                               | 10/01/2014                                                 |
| SVHC substance name                                                                                          | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8 |
| Weight                                                                                                       | 1.21 kg                                                    |
| <b>Ambient conditions</b>                                                                                    |                                                            |
| installation altitude at height above sea level maximum                                                      | 2 000 m                                                    |
| ambient temperature                                                                                          |                                                            |
| • during operation                                                                                           | -25 ... +60 °C                                             |
| • during storage                                                                                             | -55 ... +80 °C                                             |
| relative humidity minimum                                                                                    | 10 %                                                       |

|                                                                   |                    |
|-------------------------------------------------------------------|--------------------|
| relative humidity at 55 °C according to IEC 60068-2-30 maximum    | 95 %               |
| <b>Environmental footprint</b>                                    |                    |
| Environmental Product Declaration(EPD)                            | Yes                |
| Global Warming Potential [CO2 eq] total                           | 107 kg             |
| Global Warming Potential [CO2 eq] during manufacturing            | 5.88 kg            |
| Global Warming Potential [CO2 eq] during operation                | 102 kg             |
| Global Warming Potential [CO2 eq] after end of life               | -0.988 kg          |
| <b>Main circuit</b>                                               |                    |
| number of poles for main current circuit                          | 3                  |
| number of NO contacts for main contacts                           | 3                  |
| operating voltage                                                 |                    |
| • at AC-3 rated value maximum                                     | 690 V              |
| • at AC-3e rated value maximum                                    | 690 V              |
| operational current                                               |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value       | 70 A               |
| • at AC-1                                                         |                    |
| — up to 690 V at ambient temperature 40 °C rated value            | 70 A               |
| — up to 690 V at ambient temperature 60 °C rated value            | 60 A               |
| • at AC-3                                                         |                    |
| — at 400 V rated value                                            | 51 A               |
| — at 500 V rated value                                            | 51 A               |
| — at 690 V rated value                                            | 24 A               |
| • at AC-3e                                                        |                    |
| — at 400 V rated value                                            | 51 A               |
| — at 500 V rated value                                            | 51 A               |
| — at 690 V rated value                                            | 24 A               |
| • at AC-4 at 400 V rated value                                    | 41 A               |
| • at AC-5a up to 690 V rated value                                | 61.6 A             |
| • at AC-5b up to 400 V rated value                                | 41.5 A             |
| • at AC-6a                                                        |                    |
| — up to 230 V for current peak value n=20 rated value             | 43.2 A             |
| — up to 400 V for current peak value n=20 rated value             | 43.2 A             |
| — up to 500 V for current peak value n=20 rated value             | 43.2 A             |
| — up to 690 V for current peak value n=20 rated value             | 24 A               |
| • at AC-6a                                                        |                    |
| — up to 230 V for current peak value n=30 rated value             | 28.8 A             |
| — up to 400 V for current peak value n=30 rated value             | 28.8 A             |
| — up to 500 V for current peak value n=30 rated value             | 28.8 A             |
| — up to 690 V for current peak value n=30 rated value             | 24 A               |
| minimum cross-section in main circuit at maximum AC-1 rated value | 25 mm <sup>2</sup> |
| operational current for approx. 200000 operating cycles at AC-4   |                    |
| • at 400 V rated value                                            | 24 A               |
| • at 690 V rated value                                            | 20 A               |
| operational current                                               |                    |
| • at 1 current path at DC-1                                       |                    |
| — at 24 V rated value                                             | 55 A               |
| — at 60 V rated value                                             | 23 A               |
| — at 110 V rated value                                            | 4.5 A              |
| — at 220 V rated value                                            | 1 A                |
| — at 440 V rated value                                            | 0.4 A              |
| — at 600 V rated value                                            | 0.25 A             |
| • with 2 current paths in series at DC-1                          |                    |
| — at 24 V rated value                                             | 55 A               |
| — at 60 V rated value                                             | 45 A               |
| — at 110 V rated value                                            | 45 A               |
| — at 220 V rated value                                            | 5 A                |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1 A<br>0.8 A                                                                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>● <b>with 3 current paths in series at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● <b>with 3 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | 55 A<br>55 A<br>55 A<br>45 A<br>2.9 A<br>1.4 A<br><br>35 A<br>6 A<br>1 A<br>0.1 A<br>0.06 A<br><br>55 A<br>45 A<br>25 A<br>5 A<br>0.27 A<br>0.16 A<br><br>55 A<br>55 A<br>55 A<br>25 A<br>0.6 A<br>0.35 A                                        |
| <b>operating power</b> <ul style="list-style-type: none"> <li>● at AC-2 at 400 V rated value</li> <li>● at AC-3               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e               <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 22 kW<br><br>15 kW<br>22 kW<br>30 kW<br>22 kW<br><br>15 kW<br>22 kW<br>30 kW<br>22 kW                                                                                                                                                            |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 12.6 kW<br>18.2 kW                                                                                                                                                                                                                               |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=20 rated value</li> <li>● up to 400 V for current peak value n=20 rated value</li> <li>● up to 500 V for current peak value n=20 rated value</li> <li>● up to 690 V for current peak value n=20 rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 17.2 kVA<br>29.9 kVA<br>37.4 kVA<br>28.6 kVA                                                                                                                                                                                                     |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=30 rated value</li> <li>● up to 400 V for current peak value n=30 rated value</li> <li>● up to 500 V for current peak value n=30 rated value</li> <li>● up to 690 V for current peak value n=30 rated value</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 11.4 kVA<br>19.9 kVA<br>24.9 kVA<br>28.6 kVA                                                                                                                                                                                                     |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> <li>● limited to 10 s switching at zero current maximum</li> <li>● limited to 30 s switching at zero current maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 937 A; Use minimum cross-section acc. to AC-1 rated value<br>697 A; Use minimum cross-section acc. to AC-1 rated value<br>468 A; Use minimum cross-section acc. to AC-1 rated value<br>282 A; Use minimum cross-section acc. to AC-1 rated value |

|                                                                                                       |                                                           |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 229 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b>                                                                    |                                                           |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>                                             | 1 500 1/h                                                 |
| <b>operating frequency</b>                                                                            |                                                           |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> </ul>                                   | 1 000 1/h                                                 |
| <ul style="list-style-type: none"> <li>• at AC-2 maximum</li> </ul>                                   | 600 1/h                                                   |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>                                   | 800 1/h                                                   |
| <ul style="list-style-type: none"> <li>• at AC-3e maximum</li> </ul>                                  | 800 1/h                                                   |
| <ul style="list-style-type: none"> <li>• at AC-4 maximum</li> </ul>                                   | 250 1/h                                                   |
| <b>Control circuit/ Control</b>                                                                       |                                                           |
| <b>type of voltage of the control supply voltage</b>                                                  | DC                                                        |
| <b>control supply voltage at DC rated value</b>                                                       | 24 V                                                      |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b>                 |                                                           |
| <ul style="list-style-type: none"> <li>• initial value</li> </ul>                                     | 0.8                                                       |
| <ul style="list-style-type: none"> <li>• full-scale value</li> </ul>                                  | 1.2                                                       |
| <b>design of the surge suppressor</b>                                                                 | with varistor                                             |
| <b>inrush current peak</b>                                                                            | 2.6 A                                                     |
| <b>duration of inrush current peak</b>                                                                | 50 µs                                                     |
| <b>locked-rotor current mean value</b>                                                                | 0.9 A                                                     |
| <b>locked-rotor current peak</b>                                                                      | 2.1 A                                                     |
| <b>duration of locked-rotor current</b>                                                               | 230 ms                                                    |
| <b>holding current mean value</b>                                                                     | 40 mA                                                     |
| <b>closing power of magnet coil at DC</b>                                                             | 21.5 W                                                    |
| <b>holding power of magnet coil at DC</b>                                                             | 1 W                                                       |
| <b>closing delay</b>                                                                                  |                                                           |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>                                             | 35 ... 80 ms                                              |
| <b>opening delay</b>                                                                                  |                                                           |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>                                             | 30 ... 55 ms                                              |
| <b>arcing time</b>                                                                                    | 10 ... 20 ms                                              |
| <b>control version of the switch operating mechanism</b>                                              | Standard A1 - A2                                          |
| <b>Auxiliary circuit</b>                                                                              |                                                           |
| <b>design of the auxiliary switch</b>                                                                 | on the front, non-detachable                              |
| number of NC contacts for auxiliary contacts instantaneous contact                                    | 2                                                         |
| number of NO contacts for auxiliary contacts instantaneous contact                                    | 2                                                         |
| operational current at AC-12 maximum                                                                  | 10 A                                                      |
| <b>operational current at AC-15</b>                                                                   |                                                           |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>                              | 6 A                                                       |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>                              | 3 A                                                       |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>                              | 2 A                                                       |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>                              | 1 A                                                       |
| <b>operational current at DC-12</b>                                                                   |                                                           |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                               | 10 A                                                      |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                               | 6 A                                                       |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                               | 6 A                                                       |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                              | 3 A                                                       |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                              | 2 A                                                       |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                              | 1 A                                                       |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                              | 0.15 A                                                    |
| <b>operational current at DC-13</b>                                                                   |                                                           |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                               | 6 A                                                       |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                               | 2 A                                                       |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                               | 2 A                                                       |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                              | 1 A                                                       |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                              | 0.9 A                                                     |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                              | 0.3 A                                                     |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                              | 0.1 A                                                     |
| <b>contact reliability of auxiliary contacts</b>                                                      | 1 faulty switching per 100 million (17 V, 1 mA)           |
| <b>UL/CSA ratings</b>                                                                                 |                                                           |

|                                                                   |                                                                                                                                      |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>full-load current (FLA) for 3-phase AC motor</b>               |                                                                                                                                      |
| • at 480 V rated value                                            | 52 A                                                                                                                                 |
| • at 600 V rated value                                            | 52 A                                                                                                                                 |
| <b>yielded mechanical performance [hp]</b>                        |                                                                                                                                      |
| • for single-phase AC motor                                       |                                                                                                                                      |
| — at 110/120 V rated value                                        | 3 hp                                                                                                                                 |
| — at 230 V rated value                                            | 10 hp                                                                                                                                |
| • for 3-phase AC motor                                            |                                                                                                                                      |
| — at 200/208 V rated value                                        | 15 hp                                                                                                                                |
| — at 220/230 V rated value                                        | 15 hp                                                                                                                                |
| — at 460/480 V rated value                                        | 40 hp                                                                                                                                |
| — at 575/600 V rated value                                        | 50 hp                                                                                                                                |
| <b>contact rating of auxiliary contacts according to UL</b>       | A600 / Q600                                                                                                                          |
| <b>Short-circuit protection</b>                                   |                                                                                                                                      |
| <b>design of the fuse link</b>                                    |                                                                                                                                      |
| • for short-circuit protection of the main circuit                |                                                                                                                                      |
| — with type of coordination 1 required                            | gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)                                                      |
| — with type of assignment 2 required                              | gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)                                                                    |
| • for short-circuit protection of the auxiliary switch required   | gG: 10 A (500 V, 1 kA)                                                                                                               |
| <b>Installation/ mounting/ dimensions</b>                         |                                                                                                                                      |
| <b>mounting position</b>                                          | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method side-by-side mounting                            | Yes                                                                                                                                  |
| <b>fastening method</b>                                           | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715                                                             |
| <b>height</b>                                                     | 114 mm                                                                                                                               |
| <b>width</b>                                                      | 55 mm                                                                                                                                |
| <b>depth</b>                                                      | 178 mm                                                                                                                               |
| <b>required spacing</b>                                           |                                                                                                                                      |
| • with side-by-side mounting                                      |                                                                                                                                      |
| — forwards                                                        | 10 mm                                                                                                                                |
| — upwards                                                         | 10 mm                                                                                                                                |
| — downwards                                                       | 10 mm                                                                                                                                |
| — at the side                                                     | 0 mm                                                                                                                                 |
| • for grounded parts                                              |                                                                                                                                      |
| — forwards                                                        | 10 mm                                                                                                                                |
| — upwards                                                         | 10 mm                                                                                                                                |
| — at the side                                                     | 6 mm                                                                                                                                 |
| — downwards                                                       | 10 mm                                                                                                                                |
| • for live parts                                                  |                                                                                                                                      |
| — forwards                                                        | 10 mm                                                                                                                                |
| — upwards                                                         | 10 mm                                                                                                                                |
| — downwards                                                       | 10 mm                                                                                                                                |
| — at the side                                                     | 6 mm                                                                                                                                 |
| <b>Connections/ Terminals</b>                                     |                                                                                                                                      |
| <b>type of electrical connection</b>                              |                                                                                                                                      |
| • for main current circuit                                        | screw-type terminals                                                                                                                 |
| • for auxiliary and control circuit                               | spring-loaded terminals                                                                                                              |
| • at contactor for auxiliary contacts                             | Spring-type terminals                                                                                                                |
| • of magnet coil                                                  | Spring-type terminals                                                                                                                |
| <b>type of connectable conductor cross-sections</b>               |                                                                                                                                      |
| • for main contacts                                               |                                                                                                                                      |
| — solid or stranded                                               | 2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )                                                                       |
| — finely stranded with core end processing                        | 2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )                                                                       |
| • for AWG cables for main contacts                                | 2x (18 ... 2), 1x (18 ... 1)                                                                                                         |
| <b>connectable conductor cross-section for main contacts</b>      |                                                                                                                                      |
| • finely stranded with core end processing                        | 1 ... 35 mm <sup>2</sup>                                                                                                             |
| <b>connectable conductor cross-section for auxiliary contacts</b> |                                                                                                                                      |
| • solid or stranded                                               | 0.5 ... 2.5 mm <sup>2</sup>                                                                                                          |
| • finely stranded with core end processing                        | 0.5 ... 1.5 mm <sup>2</sup>                                                                                                          |
| • finely stranded without core end processing                     | 0.5 ... 2.5 mm <sup>2</sup>                                                                                                          |

|                                                                                                                                                                                                                                                                                                               |                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                           |                                                                                                                               |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul> | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 14) |
| <b>AWG number as coded connectable conductor cross section</b>                                                                                                                                                                                                                                                |                                                                                                                               |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• for auxiliary contacts</li> </ul>                                                                                                                                                                                                       | 18 ... 1<br>20 ... 14                                                                                                         |

|                                                                                                                                                                                                         |                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| <b>Safety related data</b>                                                                                                                                                                              |                                                  |
| <b>product function</b>                                                                                                                                                                                 |                                                  |
| <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> <li>• suitable for safety function</li> </ul> | Yes<br>No<br>Yes                                 |
| suitability for use safety-related switching OFF                                                                                                                                                        | Yes                                              |
| <b>service life maximum</b>                                                                                                                                                                             | 20 a                                             |
| <b>test wear-related service life necessary</b>                                                                                                                                                         | Yes                                              |
| <b>proportion of dangerous failures</b>                                                                                                                                                                 |                                                  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>                                                   | 40 %<br>73 %                                     |
| <b>B10 value with high demand rate according to SN 31920</b>                                                                                                                                            | 1 000 000                                        |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>                                                                                                                                    | 100 FIT                                          |
| <b>ISO 13849</b>                                                                                                                                                                                        |                                                  |
| <b>device type according to ISO 13849-1</b>                                                                                                                                                             | 3                                                |
| <b>overdimensioning according to ISO 13849-2 necessary</b>                                                                                                                                              | Yes                                              |
| <b>IEC 61508</b>                                                                                                                                                                                        |                                                  |
| <b>safety device type according to IEC 61508-2</b>                                                                                                                                                      | Type A                                           |
| <b>Electrical Safety</b>                                                                                                                                                                                |                                                  |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                                                                          | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                             | finger-safe, for vertical contact from the front |

|                                 |  |
|---------------------------------|--|
| <b>Approvals Certificates</b>   |  |
| <b>General Product Approval</b> |  |



[Confirmation](#)



[KC](#)

|                                 |            |                                                                                                |                          |
|---------------------------------|------------|------------------------------------------------------------------------------------------------|--------------------------|
| <b>General Product Approval</b> | <b>EMV</b> | <b>Test Certificates</b>                                                                       | <b>Marine / Shipping</b> |
|                                 |            | <a href="#">Special Test Certificate</a><br><a href="#">Type Test Certificates/Test Report</a> | <br>                     |

|                          |                                                                          |                |
|--------------------------|--------------------------------------------------------------------------|----------------|
| <b>Marine / Shipping</b> | <b>other</b>                                                             | <b>Railway</b> |
| <br><br><br>             | <a href="#">Confirmation</a><br><a href="#">Special Test Certificate</a> |                |

|                    |                                             |
|--------------------|---------------------------------------------|
| <b>Environment</b> |                                             |
|                    | <a href="#">Environmental Conformations</a> |

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2036-3KB44-3MA0>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2036-3KB44-3MA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-3KB44-3MA0>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2036-3KB44-3MA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2036-3KB44-3MA0&lang=en)


### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-3KB44-3MA0/char>

### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2036-3KB44-3MA0&objecttype=14&gridview=view1>

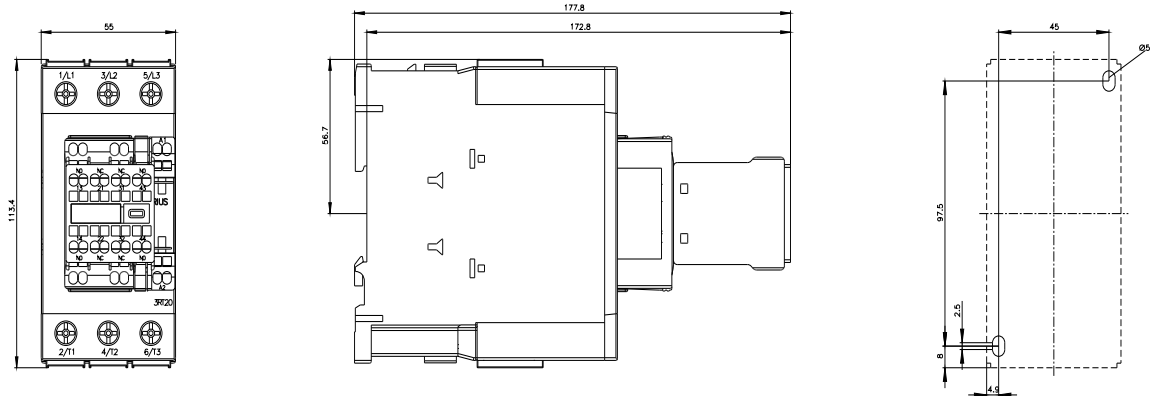

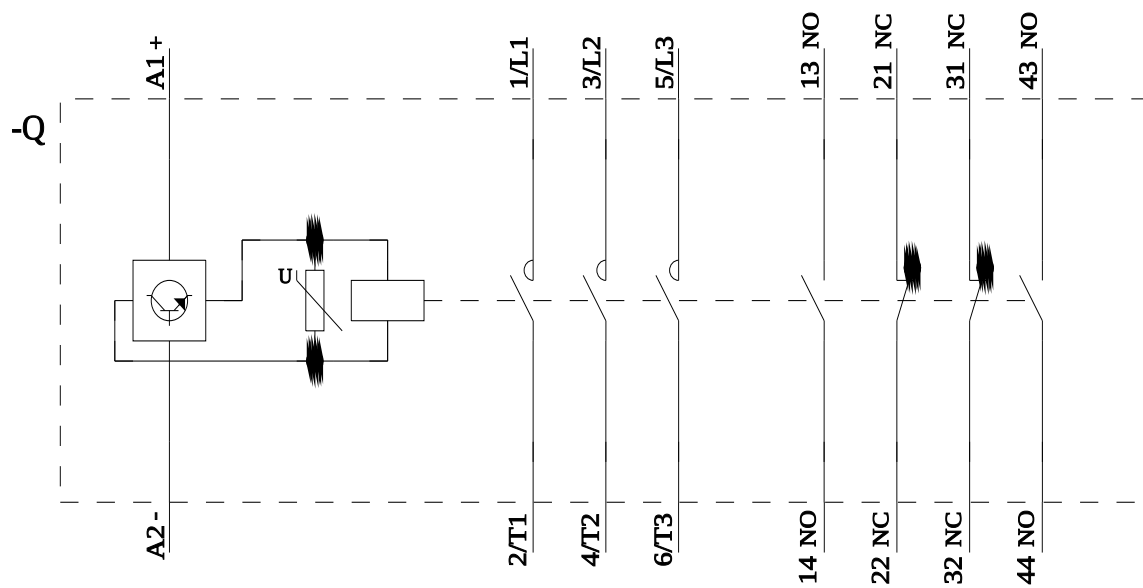

last modified:

8/12/2024