



mechanical latch, 24 V AC/DC, for contactors 3RT202, 3RT232, 3RT252

product brand name	SIRIUS
product category	Latching blocks
product designation	mechanical latch
General technical data	
size of contactor	S0
insulation voltage with degree of pollution 3 at AC rated value	300 V
power loss [W] of magnet coil at DC typical	4 W
power loss [V·A] of magnet coil at AC typical	4 VA
surge voltage resistance rated value	4 kV
protection class IP on the front	IP20
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Weight	0.121 kg
type of voltage of the control supply voltage	AC/DC
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage 1 at DC rated value	24 V
operating range factor control supply voltage rated value of magnet coil	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.85 ... 1.1
• at 60 Hz	0.85 ... 1.1
number of NC contacts for auxiliary contacts	0
• instantaneous contact	0
• lagging switching	0
number of NO contacts for auxiliary contacts	0
• instantaneous contact	0
• leading contact	0
Ambient conditions	
ambient temperature	

- during operation -25 ... +60 °C
- during storage -50 ... +80 °C

Environmental footprint

Environmental Product Declaration(EPD)	Yes
Global Warming Potential [CO2 eq] total	7.04 kg
Global Warming Potential [CO2 eq] during manufacturing	0.089 kg
Global Warming Potential [CO2 eq] during operation	6.96 kg
Global Warming Potential [CO2 eq] after end of life	-0.0061 kg

Installation/ mounting/ dimensions

mounting position	any
fastening method	clip-on
height	48.4 mm
width	22 mm
depth	84.3 mm

Connections/ Terminals

type of electrical connection for auxiliary and control circuit	screw-type terminals
connectable conductor cross-section for auxiliary contacts	
• solid or stranded	0.5 ... 4 mm ²
• finely stranded with core end processing	0.5 ... 2.5 mm ²
type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	2x (0.5 ... 2.5 mm ²), 1x 4 mm ²
— finely stranded with core end processing	2x (0.5 ... 2.5 mm ²), 1x 2.5 mm ²
• for AWG cables for auxiliary contacts	2x 14, 1x 12
AWG number as coded connectable conductor cross section for auxiliary contacts	14 ... 12

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV	Test Certificates	other	Railway
	Special Test Certificate	Type Test Certificates/Test Report	Special Test Certificate
		Miscellaneous	Confirmation

Environment



[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-3AB31>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-3AB31>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-3AB31>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-3AB31&lang=en

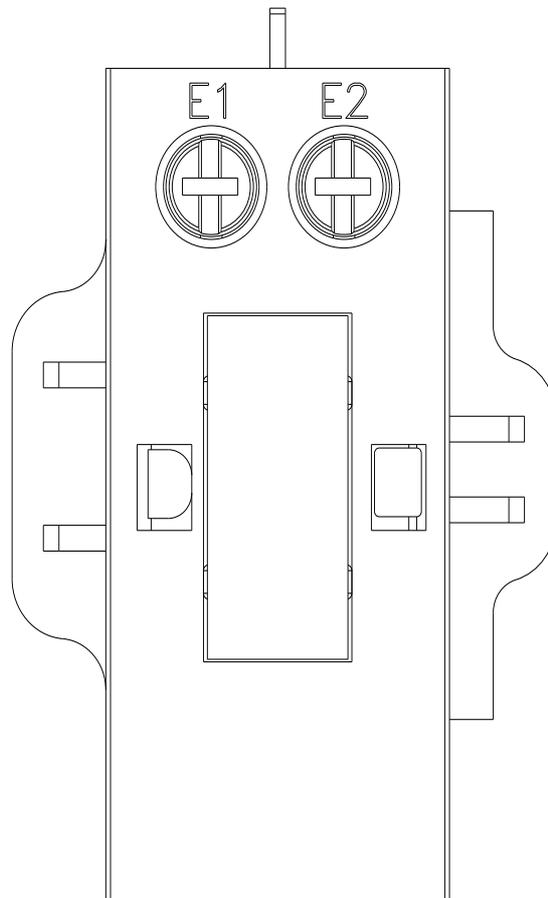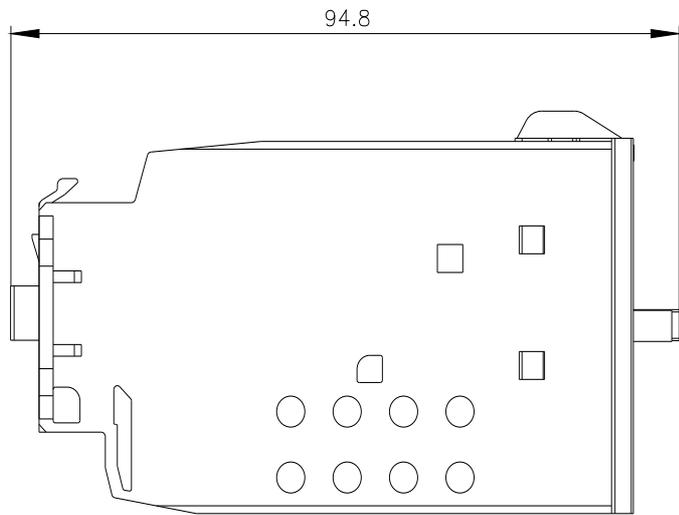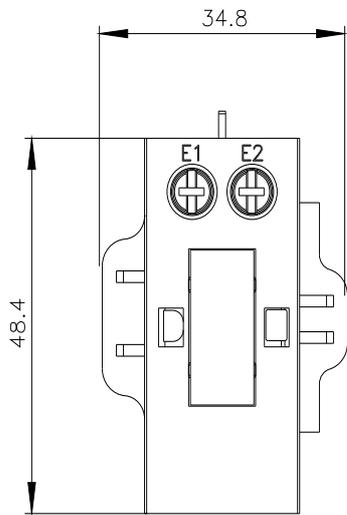

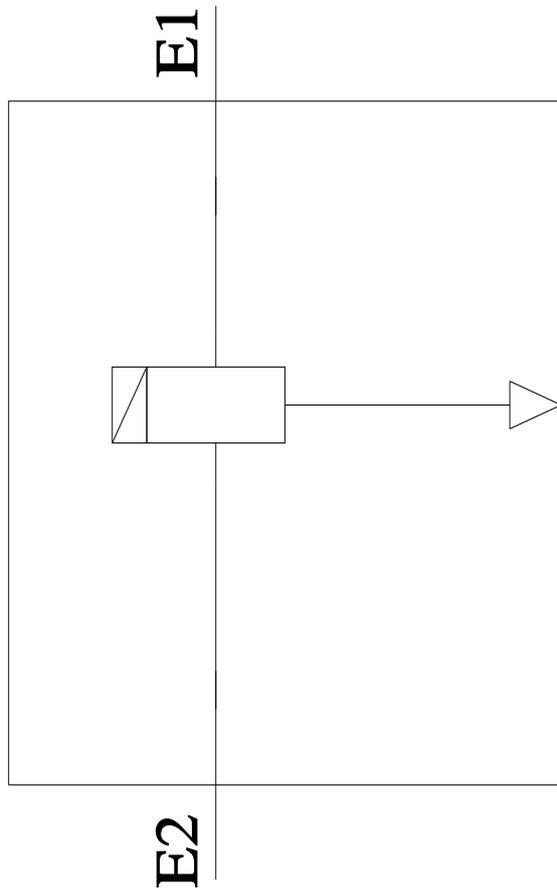

last modified:

5/29/2024 