




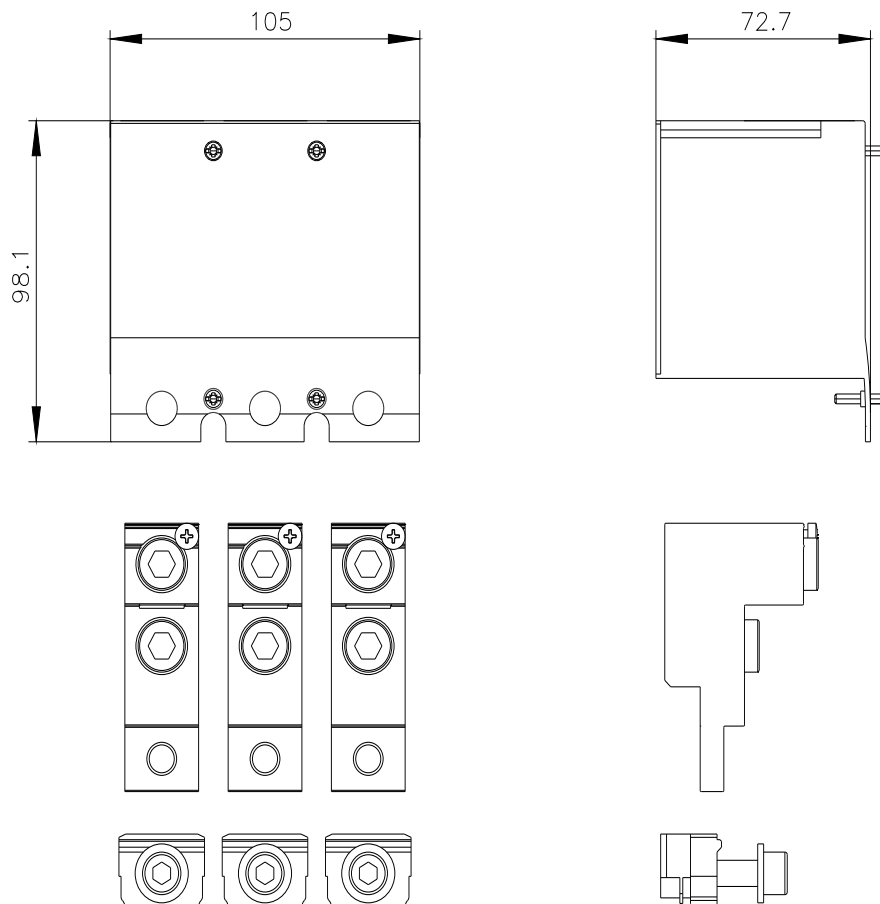




wire connector TA2.3 2 x 4 AWG...300 kcmil with control wire tap; for 2 cables; 3 units; incl. terminal cover extended with holes for voltage testing; accessory for: 3VA52

Model		
product brand name	SENTRON	
product designation	Circular conductor terminal 2 cables 3 units	
accessories	Wire connector	
General technical data		
designation / of the terminal	TA2.3	
type of electrical connection / with control wire tap	Yes	
Connections according IEC		
connectable conductor cross-section		
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	25 mm ² 150 mm ² 25 mm ² 150 mm ²	
stripped length	26 / 51 mm	
tightening torque / when using copper cables		
<ul style="list-style-type: none"> stranded finely stranded finely stranded / with core end processing 	25 - 150 mm ² : 31.1 Nm 25 - 150 mm ² : 31.1 Nm 25 - 70 mm ² : 31.1 Nm	
Connections according UL		
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C	
stripped length	1.0 / 2.0 in	
connectable conductor cross-section		
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	4 AWG 300 kcmil 4 AWG 300 kcmil	
tightening torque / when using copper cables		
<ul style="list-style-type: none"> stranded 	4 AWG - 300 kcmil: 275 lb-in	
Certificates		
General Product Approval	EMV	Maritime application
 EG-Konf.		Miscellaneous
		 RCM
		 LRS
other	Environment	

Further information**Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information for data generation and storage**<https://support.industry.siemens.com/cs/ww/en/view/109995012>**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3VA9233-0JC28>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3VA9233-0JC28>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mifb=3VA9233-0JC28**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**<http://www.siemens.com/specifications>

last modified:

8/8/2025

