



Miniature circuit breaker 240 V 14kA, 1-pole, D, 10A, D=70 mm according to UL 489

Figure similar

| Model  |  |
|--|--|
| product brand name   | SENTRON  |
| product designation  | Miniature circuit breakers   |
| design of the product  | Miniature circuit-breaker 5SJ4                                       |
| General technical data   |  |
| number of poles  | 1  |
| design of pole   | 1P   |
| tripping characteristic class  | D  |
| mechanical service life (operating cycles) typical   | 10 000   |
| installation environment regarding EMC   | Suitable for environment B (immunity to interference not applicable) |
| reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750 | F  |
| overvoltage category   | 3  |
| degree of pollution  | 3  |
| Voltage  |  |
| insulation voltage (U <sub>i</sub> ) at AC rated value                                     | 440 V  |
| operational current  |  |
| • at 30 °C rated value   | 10 A   |
| • at 40 °C rated value   | 10 A   |
| • at 50 °C rated value   | 9.4 A  |
| • at 55 °C rated value   | 9.1 A  |
| • at 60 °C rated value   | 0.88 A   |
| • at AC rated value  | 10 A   |
| Supply voltage   |  |
| supply voltage   |  |
| • at AC  | 400 V  |
| • at DC rated value  | 60 V   |
| operating voltage  |  |
| • at AC according to UL 489 and CSA C22.2 No. 5-02 maximum                                 | 240 V  |
| • at DC rated value maximum  | 60 V   |
| • at DC 1-channel according to UL 489 and CSA C22.2 No. 5-02 maximum                       | 60 V   |
| • at DC 2-channel according to UL 489 and CSA C22.2 No. 5-02 maximum                       | 125 V  |
| supply voltage frequency rated value   | 50 Hz  |
| Protection class   |  |
| protection class IP  | IP20, with connected conductors, IP 40 in the handle range           |
| Breaking Capacity  |  |
| switching capacity current   |  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• according to EN 60898 rated value</li> </ul>         | 10 kA  |
| <ul style="list-style-type: none"> <li>• according to IEC 60947-2 rated value</li> </ul>      | 15 kA  |
| <b>Dissipation</b>  |  |
| power loss [W] for rated value of the current at AC in hot operating state per pole           | 1.3 W  |
| <b>Main circuit</b>   |  |
| type of voltage supply at AC according to UL 489 and CSA C22.2 No. 5-02                       | 240  |
| suitability for operation   | Infrastructure / Industry  |
| <b>Product details</b>  |  |
| product feature touch protection  | Yes  |
| product component   |  |
| <ul style="list-style-type: none"> <li>• tunnel terminals top</li> </ul>                      | No   |
| <ul style="list-style-type: none"> <li>• tunnel terminals bottom</li> </ul>                   | No   |
| <ul style="list-style-type: none"> <li>• combined terminal top</li> </ul>                     | Yes  |
| <ul style="list-style-type: none"> <li>• combined terminal bottom</li> </ul>                  | Yes  |
| <ul style="list-style-type: none"> <li>• neutral conductor switching</li> </ul>               | No   |
| <b>product feature</b>  |  |
| <ul style="list-style-type: none"> <li>• halogen-free</li> </ul>                              | Yes  |
| <ul style="list-style-type: none"> <li>• sealable</li> </ul>                                  | Yes  |
| <ul style="list-style-type: none"> <li>• silicon-free</li> </ul>                              | Yes  |
| product extension installable supplementary devices   | Yes  |
| <b>Product function</b>   |  |
| set values setting current (Ii) for I-tripping  | 14   |
| reference value setting current (Ii) for I-tripping   | x In   |
| product function note   | Terminal tightening torque for Cu, 60/75°C; 3.5Nm/31lb.in                |
| <b>Short circuit</b>  |  |
| short-circuit current breaking capacity (Icn) at AC according to UL 1077 and CSA C22.2 No.235 | 14 kA  |
| <b>Connections</b>  |  |
| connectable conductor cross-section finely stranded with core end processing                  |  |
| <ul style="list-style-type: none"> <li>• minimum</li> </ul>                                   | 0.75 mm <sup>2</sup>   |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>                                   | 25 mm <sup>2</sup>   |
| tightening torque with screw-type terminals maximum   | 3.5 N·m  |
| position of power supply cord   | Any  |
| <b>Mechanical Design</b>  |  |
| height  | 110 mm   |
| width   | 18 mm  |
| depth   | 70 mm  |
| installation depth  | 70 mm  |
| number of modular width units   | 1  |
| <b>fastening method</b>   | on standard mounting rail  |
| mounting position   | any  |
| net weight  | 171 g  |
| <b>Environmental conditions</b>   |  |
| standard  | IEC / EN 60947-2 / UL 489  |
| vibration resistance  | 50 m/s <sup>2</sup> at 25 to 150Hz and 60m/s <sup>2</sup> at 35Hz (4sec) |
| vibration resistance according to IEC 60068-2-6   | ±1 mm at 5 to 25 Hz; 50 m/s <sup>2</sup> at 25 to 150 Hz                 |
| ambient temperature during operation  |  |
| <ul style="list-style-type: none"> <li>• minimum</li> </ul>                                   | -25 °C   |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>                                   | 55 °C  |
| ambient temperature during operation  | max. 95% humidity  |
| ambient temperature during storage  |  |
| <ul style="list-style-type: none"> <li>• minimum</li> </ul>                                   | -40 °C   |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>                                   | 75 °C  |
| <b>Approvals Certificates</b>   |  |
| <b>General Product Approval</b>   |  |



[Confirmation](#)



|                          |  |                              |                               |   |   |
|--------------------------|--|------------------------------|-------------------------------|---|---|
| General Product Approval | Test Certificates                        | other                        | Environment                   |   |   |
|                          | <a href="#">Special Test Certificate</a> | <a href="#">Confirmation</a> | <a href="#">Miscellaneous</a> | <a href="#">Environmental Confirmations</a> | <a href="#">Environmental Confirmations</a> |

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SJ4110-8HG41>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SJ4110-8HG41>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SJ4110-8HG41](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SJ4110-8HG41)

#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>

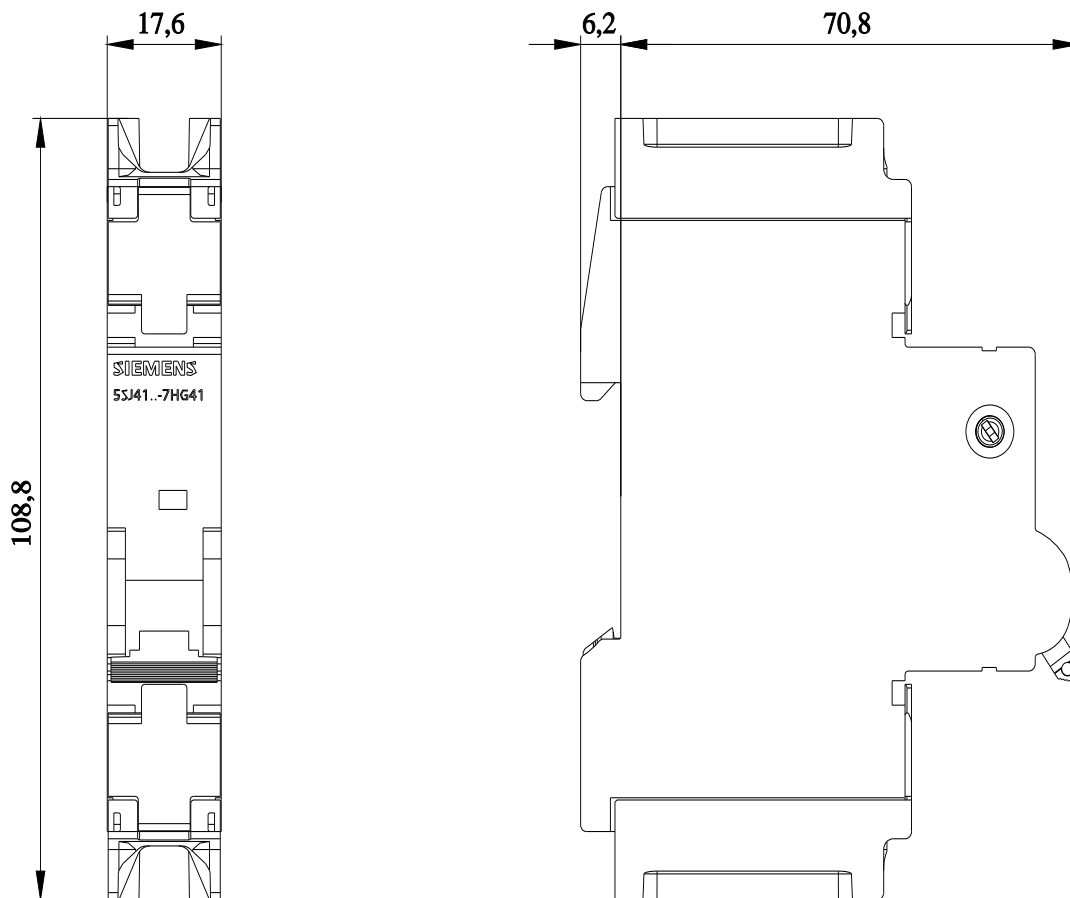

last modified:

8/22/2024

