



Transformer, Type T, industrial control, 100VA, 1 phase, 120V primary, 120V secondary, 55C rise

9070T100D24

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product Type	Industrial Control Transformer		
Туре	T		

Complementary

Number of Phases	1 phase
Power Rating	100 VA UL
	100 VA CSA
	100 VA NOM
	100 VA CE
Primary to Secondary Voltage	120 V 120 V
	115 V 115 V
	110 V 110 V
Temperature Rise	55 °C
Electrical Connection	Screw clamp terminals
Height	2.89 in (73.41 mm)
Width	3.38 in (85.85 mm)
Depth	3.34 in (84.84 mm)
Material	Copper: winding
Fingersafe Cover Compatibility	FSC1

Environment

Certifications	CSA file LR37055 guide 184-N-90 UL listed file E61239 Not rated (open device)		
Enclosure Type			
Insulation Temperature	221 °F (105 °C)		

Ordering and shipping details

Category	US10CP816206		
Discount Schedule	0CP8		
GTIN	785901737810		
Returnability	No		
Country of origin	US		

Packing Units

Unit Type of Package 1	PCF	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nbr. of units in pkg.	1		
Package 1 Height	3.70 in (9.398 cm)		
Package 1 Width	4.00 in (10.16 cm)		
Package 1 Length	4.10 in (10.414 cm)		
Package weight(Lbs)	3.801 lb(US) (1.724 kg)		

Contractual warranty

Warranty 10 Years



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Environmental Disclosure

Product Environmental Profile

Use Better


⊗ Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

○ Repack and remanufacture		
Circularity Profile	No need of specific recycling operations	
Take-back	No	


Technical Illustration

Dimensions

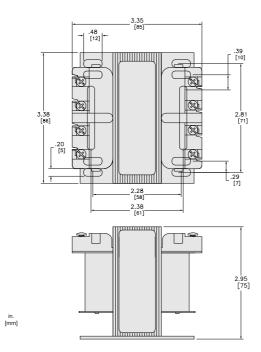

Technical Illustration

Wiring diagram



Options

puono				
Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D3	208	120	Connect to H1 and H2	Connect to X1 and X2
D4	277	120		
D5	550 575 600	110 115 120		
D6	380	110		
D17	415	110		
D24	110 115 120	110 115 120		
D93	200	115		
D103	400	120		

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.