

Product data sheet

Specifications

SQUARE D



Terminal block, Linergy, fuse holder, Class CC, 30A, 600V, 1 pole

9080FB1611CC

Product availability: Stock - Normally stocked in distribution facility

Main

Range	9080FB
Product	Fuse holder

Complementary

Current Rating	30 A
[Ue] rated operational voltage	<= 600 V AC/DC
Fuse type	CC
Fuse size	0.4063 x 1.5 in
Number of poles	1
Electrical Connection	Pressure wire clamp
Wire Gauge	AWG 14...AWG 10 copper or aluminium
SCCR	200 kA UL 512
Product Certifications	UL recognized E40747 CCN IZLT2 CSA file 70360 class 6225 01 CE
Operating Temperature	-40...125 °C (-40...257 °F)
Mounting Type	Surface mount
Block Material	Thermoplastic: block
Wire stripping length	0.4375 in (11.125 mm)
Terminal Tightening Torque	screw terminals 25 lbf.in (2.8 N.m) AWG 14...AWG 10 copper
Height	3.13 in (79.50 mm)
Width	0.85 in (21.59 mm)
Depth	1.29 in (32.77 mm)

Ordering and shipping details

Category	US10CP121701
Discount Schedule	0CP1
GTIN	785901097198
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nbr. of units in pkg.	1
Package 1 Height	0.90 in (2.286 cm)
Package 1 Width	1.40 in (3.556 cm)
Package 1 Length	3.10 in (7.874 cm)
Package weight(Lbs)	1.440 oz (40.823 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	50
Package 2 Height	3.90 in (9.906 cm)
Package 2 Width	6.90 in (17.526 cm)
Package 2 Length	9.70 in (24.638 cm)
Package 2 Weight	4.579 lb(US) (2.077 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Take-back	No

Technical Illustration

Dimensions

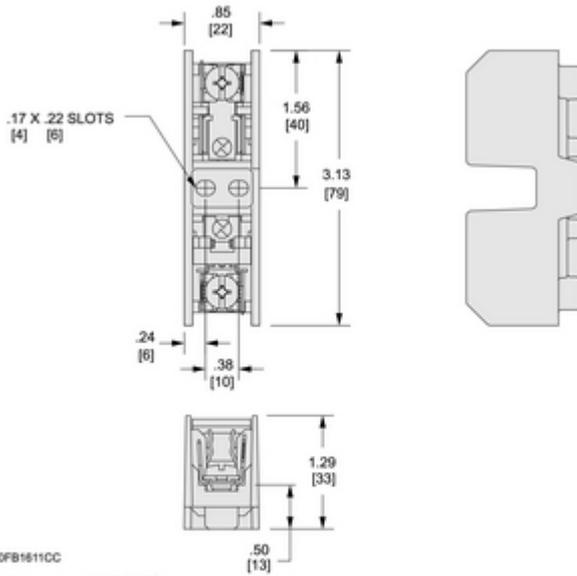

9080FB1611CC

Wire Size: #14-#10 AWG
Terminal torque: 25 lb./in.
Mounting Hwd.: #8 SCREWS

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.