Product data sheet

Specifications

SQUARE D

Terminal block, Linergy, fuse holder, Class J, 60A, 600V, 3 pole

9080FB3621J

Product availability: Stock - Normally stocked in distribution facility

Main

Range	9080FB
Product	Fuse holder

Complementary

Current Rating	60 A
[Ue] rated operational voltage	<= 600 V AC/DC
Fuse type	J
Fuse size	1.0625 x 2.375 in
Number of poles	3
Electrical Connection	Box lugs
Wire Gauge	AWG 14...AWG 2 copper or aluminium
SCCR	200 kA UL 512
Product Certifications	CSA file 70360 class 6225 01 UL listed file E40747 CCN IZLT CE
Operating Temperature	-40…125 °C (-40…257 °F)
Mounting Type	Surface mount
Block Material	Thermoplastic: block
Wire stripping length	0.5625 in (14.2875 mm)
Terminal Tightening Torque	lugs 50 lbf.in (5.6 N.m) AWG 3...AWG 2 copper or aluminium lugs 45 lbf.in (5.08 N.m) AWG 6...AWG 4 copper or aluminium lugs 40 lbf.in (4.5 N.m) AWG 8 copper or aluminium lugs 35 lbf.in (4.0 N.m) AWG 12...AWG10 copper or aluminium lugs 35 lbf.in (4.0 N.m) AWG 14 copper
Height	4.07 in (103.38 mm)
Width	4.72 in (119.89 mm)
Depth	2.09 in (53.09 mm)

Ordering and shipping details

Category	US10CP121701
Discount Schedule	0CP1
GTIN	785901139669
Returnability	Yes
Country of origin	US

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Life Is On | **Schneider Electric**

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.20 in (5.588 cm)
Package 1 Width	4.10 in (10.414 cm)
Package 1 Length	4.80 in (12.192 cm)
Package weight(Lbs)	12.480 oz (353.802 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Height	5.00 in (12.7 cm)
Package 2 Width	12.00 in (30.48 cm)
Package 2 Length	19.70 in (50.038 cm)
Package 2 Weight	15.871 lb(US) (7.199 kg)

Contractual warranty

Warranty	18 months

Life Is On | Schneider Electric

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained 〉
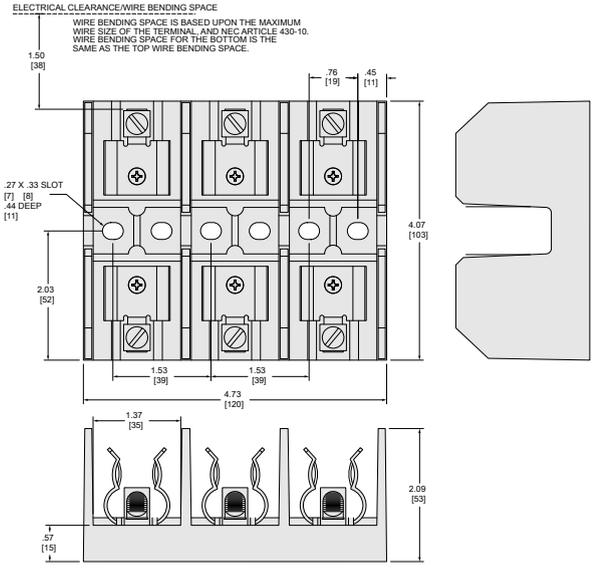
How we assess product sustainability 〉

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**REACh Declaration**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

Repack and remanufacture

Take-back	**No**

Technical Illustration

Dimensions

ELECTRICAL CLEARANCE/WIRE BENDING SPACE

WIRE BENDING SPACE IS BASED UPON THE MAXIMUM
WIRE SIZE OF THE TERMINAL, AND NEC ARTICLE 430-10.
WIRE BENDING SPACE FOR THE BOTTOM IS THE
SAME AS THE TOP WIRE BENDING SPACE.

1.50
[38]

.76
[19]

.45
[11]

.27 X .33 SLOT
[7]   [8]
.44 DEEP
[11]

4.07
[103]

2.03
[52]

1.53
[39]

1.53
[39]

4.73
[120]

1.37
[35]

2.09
[53]

.57
[15]

ALL DIMENSIONS ARE APPROXIMATE.
ALSO SEE TECHNICAL DRAWINGS AND DOCUMENTATION.