

# Product data sheet

Specifications

SQUARE D



Power distribution block, Linergy, 3 pole, 2 line, 6 load, 350A Cu, 270A Al, 600V

9080LBA363206

Product availability: Stock - Normally stocked in distribution facility

## Main

Range	9080LB
Product	Power Distribution Block
Current Rating	270 A aluminium 350 A copper
Short Circuit Current Rating	65 kA

## Complementary

Voltage Rating	600 V AC/DC
Mounting Type	Surface mount
Number of poles	3
Terminals per Pole	2 load 6 line
Wire Size	Line 2, AWG 14...AWG 2/0, copper or aluminium Load 6, AWG 14...AWG 4, copper or aluminium
Electrical Connection	Tin plated aluminium lugs
SCCR	100 kA UL 508 A
Ambient Air Temperature for Operation	-40...150 °C (-40...302 °F)
Block Material	Phenolic: block
Terminal Tightening Torque	Line lug 40 lbf.in (4.5 N.m) AWG 8 copper or aluminium Line lug 120 lbf.in (13.6 N.m) AWG 6...AWG 2/0 copper or aluminium Line lug 35 lbf.in (4.0 N.m) AWG 14...AWG 10 copper or aluminium Load lug 35 lbf.in (4.0 N.m) AWG 14...AWG 4 copper or aluminium
Wire stripping length	Load: 0.44 in (11.18 mm) for top connection Load: 0.75 in (19.05 mm) for bottom connection Line: 1.06 in (26.92 mm)
Height	4 in (101.6 mm)
Width	5 in (127 mm)
Depth	2.61 in (66.29 mm)
End Barrier	9080LB33

## Environment

Certifications	UL recognized E60616 CCN XCFR2 CSA file 70361 class 6228 01 CE
----------------	--

## Ordering and shipping details

Category	US10CP121711
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

Discount Schedule	0CP1
GTIN	785901097488
Returnability	Yes
Country of origin	US

---

## Packing Units

---

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.00 in (7.62 cm)
Package 1 Width	4.30 in (10.922 cm)
Package 1 Length	5.20 in (13.208 cm)
Package weight(Lbs)	19.840 oz (562.455 g)

---

## Contractual warranty

---

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>


## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No

## Technical Illustration

## Dimensions

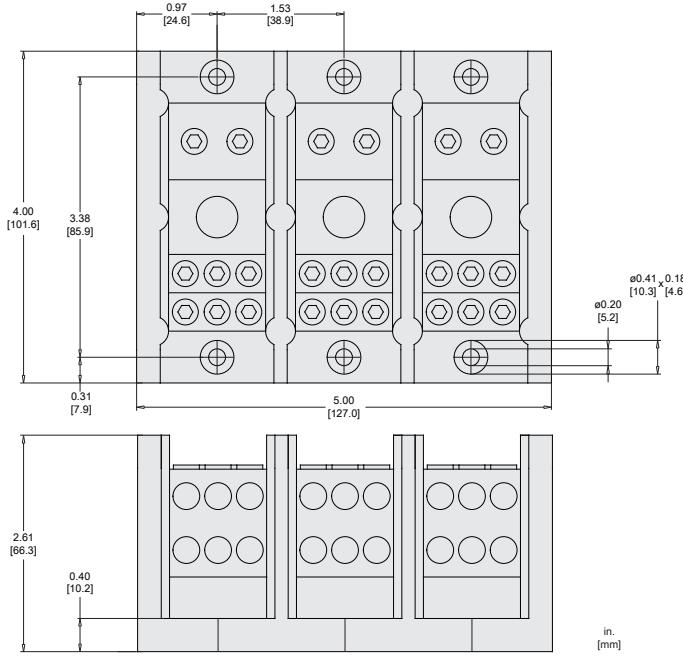

9080LBA363206