

# Product data sheet

Specifications

SQUARE D



## Automatic switch, PowerPacT H, 150A, 3 pole, 600VAC, 50kA, lugs, magnetic

HLL36000S15

Product availability: Stock - Normally stocked in distribution facility

### Main

Product or Component Type	Automatic switch
Range of Product	PowerPact H
Trip unit technology	Magnetic

### Complementary

Line Rated Current	150 A
[Ue] rated operational voltage	600 V AC 250 V DC
Mounting Mode	Unit mount
Poles description	3P
Short-circuit withstand	125 kA 240 V UL 489 100 kA 480 V UL 489 50 kA 600 V UL 489
Breaking capacity code	L
Electrical connection	Lugs, line Lugs, load
AWG gauge	x AWG 14...AWG 3/0 ( aluminium/copper )
Terminal identifier	AL150HD
Magnetic tripping current	2250 A
Height	6.4 in (162.6 mm)
Width	2.12 in (53.85 mm)
Depth	4.36 in (110.74 mm)
Tightening torque	44.3 lbf.in (5 N.m) 0.004...0.1 in <sup>2</sup> (2.5...95 mm <sup>2</sup> ) (AWG 14...AWG 3/0)

### Environment

Product Certifications	CE IEC CCC CSA NMX UL Listed
------------------------	---

### Ordering and shipping details

Category	US10DE201120
Discount Schedule	0DE2
GTIN	785901683186

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

<b>Returnability</b>	Yes
----------------------	-----

---

<b>Country of origin</b>	MX
--------------------------	----

---

## Packing Units

---

<b>Unit Type of Package 1</b>	PCE
-------------------------------	-----

---

<b>Nbr. of units in pkg.</b>	1
------------------------------	---

---

<b>Package 1 Height</b>	5.80 in (14.732 cm)
-------------------------	---------------------

---

<b>Package 1 Width</b>	7.50 in (19.05 cm)
------------------------	--------------------

---

<b>Package 1 Length</b>	9.00 in (22.86 cm)
-------------------------	--------------------

---

<b>Package weight(Lbs)</b>	4.61 lb(US) (2.09 kg)
----------------------------	-----------------------

---

## Contractual warranty

---

<b>Warranty</b>	18 months
-----------------	-----------

---

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 450

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

California proposition 65 **WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

PVC free Yes

## Use Again


### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back No

Technical Illustration

Dimensions

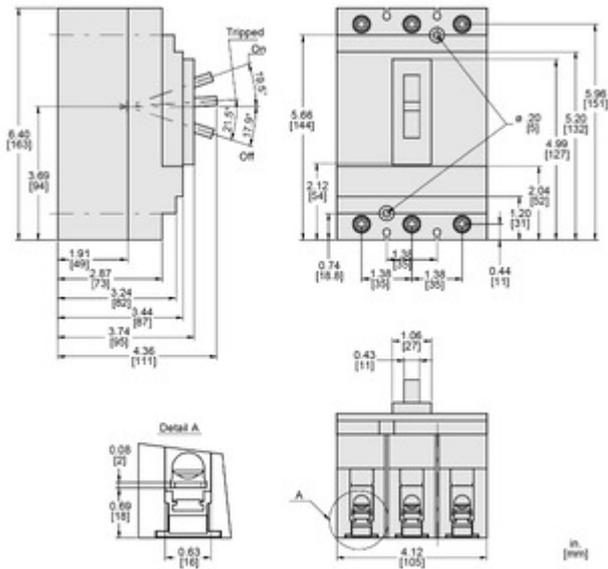

All dimensions are approximate. Also refer to technical drawings and documentation.