

Product data sheet

Specifications

SQUARE D



Load center, Homeline, 1 phase, 30 spaces, 60 circuits, 200A convertible main breaker, PoN, NEMA3R, value pack

HOM3060M200PRBVP

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Load Center
Marketing Trade Name	Homeline
Load Center Type	PoN Convertible Mains (breaker)
Rated Current	200 A
Number of Spaces	30
Maximum Number of Single Pole Circuits	60
Enclosure Rating	NEMA 3R weatherproof enclosure
Cover Type	Surface cover
Electrical Connection	Lugs
Provided Equipment	Circuit-breaker 1) 2P 200 A 120/240 V CA main supply ready assembled Circuit-breaker 3) 1P 20 A 120/240 V CA Circuit-breaker 2) 2P 30 A 120/240 V CA

Complementary

Max Short Circuit Current Rating	22 kA
Maximum Number of Tandem Breakers	30
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 4...250 kcmil aluminium/copper
Ground Bar	Grounding bar (ordered separately)
Busbar Material	Tin plated aluminium: busbar
Enclosure Material	Welded galvanized steel
Surface Finish	Baked enamel Gray
Box Number	7R
Bus Rated Current	225.0 A
Height	33.8 in (858 mm)
Width	14.8 in (375 mm)
Depth	4.5 in (115 mm)

Environment

Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
---------------------------------------	---------------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Product Certifications	UL listed file E-6294
------------------------	-----------------------

Ordering and shipping details

Category	US1DE3C00185
Discount Schedule	DE3C
GTIN	785901978107
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	48.00 in (121.92 cm)
Package 1 Width	154.00 in (391.16 cm)
Package 1 Length	355.00 in (901.7 cm)
Package weight(Lbs)	40.841 lb(US) (18.525 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	24
Package 2 Height	44.00 in (111.76 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	878.0005 lb(US) (398.254 kg)



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **97**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **No**

EU RoHS Directive **Under investigation**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

Repack and remanufacture


Circularity Profile **No need of specific recycling operations**

Take-back **No**

Product data sheet HOM3060M200PRBVP

Technical Illustration

Dimensions

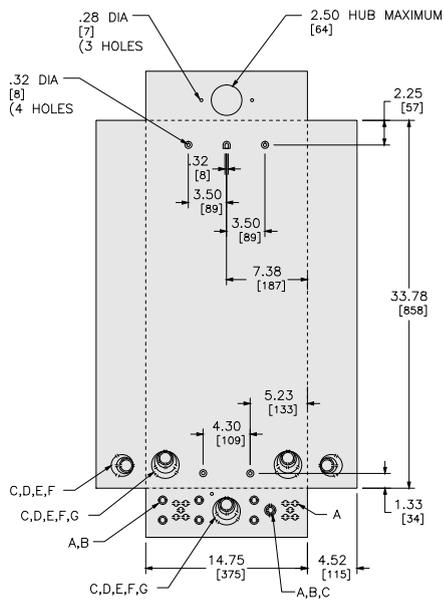

in.
[mm]


KNOCKOUTS							
SYMBOL	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

Dimensions are approximate. Refer to technical documentation for additional detail.

Product data sheet HOM3060M200PRBVP

Technical Illustration


Wiring diagram

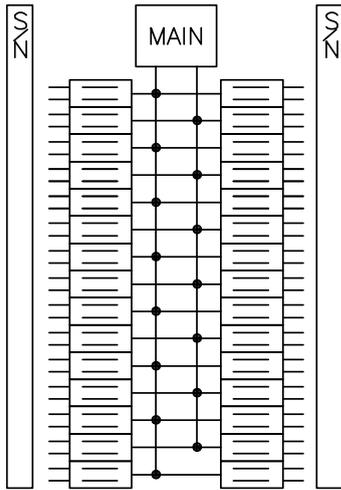

HOM3060M150PRB
HOM3060M200PRB

Image of product / Alternate images

Alternative

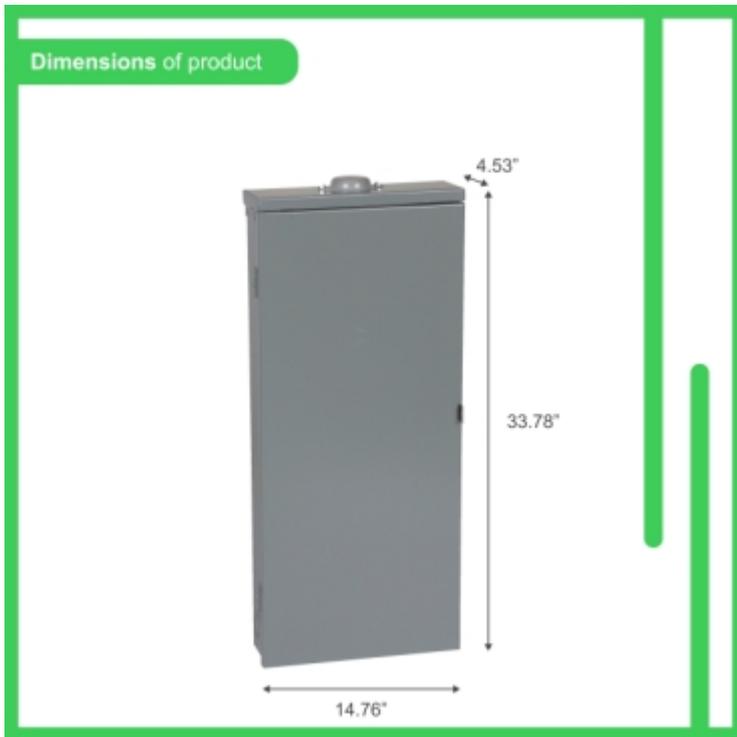

200A
120/240 V- Max., 1Ø, 50/60 Hz

30 Spaces
Espacios

60 Circuits
Circuitos

Main Breaker
Interruptor Principal

Rainproof
Resistente a la intemperie

INCLUDES INCLUIDOS

Surface
Sobreponer

40.9 lbs / 18.5 kg
W14.8" x H34.2" x D4.5"

A red vertical banner on the left contains specifications: 200A, 120/240 V- Max., 1Ø, 50/60 Hz, 30 Spaces/Espacios, 60 Circuits/Circuitos, Main Breaker/Interruptor Principal, and Rainproof/Resistente a la intemperie. To the right, under 'INCLUDES INCLUIDOS', is an image of the panel with its door open. Below that, the text reads 'Surface/Sobreponer', '40.9 lbs / 18.5 kg', and 'W14.8" x H34.2" x D4.5"'. The Schneider Electric logo is at the bottom right of the banner area.