

Product data sheet

Specifications

SQUARE D



Circuit breaker, PowerPact L,
250A, 3 pole, 600VAC, 18kA,
busbar, MicroLogic 3.3, 80%

LGF36250U31X

Product availability: Stock - Normally stocked in distribution facility

Main

Range	PowerPact
Product name	PowerPact L
Device short name	L-Frame
Product or Component Type	Circuit breaker
Device Application	Distribution

Complementary

Line Rated Current	250 A
Number of Poles	3P
Control Type	Toggle
Breaking capacity code	G
Breaking capacity	65 kA 240 V AC 50/60 Hz UL 489 35 kA 480 V AC 50/60 Hz UL 489 18 kA 600 V AC 50/60 Hz UL 489 20 kA 250 V DC UL 489 20 kA 500 V DC UL 489
[Ue] rated operational voltage	600 V AC 50/60 Hz IEC 60947-3
Network Frequency	50/60 Hz
[Ics] rated service breaking capacity	65 kA 220/240 V AC 50/60 Hz IEC 60947-2 35 kA 380/440/415 V AC 50/60 Hz IEC 60947-2 18 kA 500/525 V AC 50/60 Hz IEC 60947-2 20 kA 250 V DC IEC 60947-2 20 kA 500 V DC IEC 60947-2
[Uimp] rated impulse withstand voltage	8 kV IEC 60947-2
Trip unit technology	Electronic, standard, MicroLogic 3.3, LI
Continuous current rating	80 %
[Ui] rated insulation voltage	750 V IEC 60947-2
Trip unit name	MicroLogic 3.3
Protection technology	Current limiter
Suitability for isolation	Yes IEC 60947-2
Utilisation category	Category A
AWG gauge	AWG 2...600 kcmil copper AWG 2...500 kcmil aluminium
Local signalling	Ready 1 LED green) Alarm 1 LED 90 % Ir orange) Alarm LED 105 % Ir red) Switched off (OFF) 1 trip indicator green)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Mounting mode	Unit mount busbar)
Mounting Support	Busbar
Electrical connection	Busbar connection, line Busbar connection, load
Terminal identifier	AL400L61K3
Long time pick-up adjustment range	0.25...1 x In
Tightening torque	442.5 lbf.in (50 N.m) 0.05...0.5 in ² (35...300 mm ²) (AWG 2...600 kcmil) 442.5 lbf.in (50 N.m) 0.05...0.4 in ² (35...240 mm ²) (AWG 2...500 kcmil)
Number of slots	2 auxiliary switch OF plug-in) 1 alarm switch SD plug-in) 1 overcurrent trip switch SDE plug-in) 1 voltage release MN or MX plug-in)
Power wire stripping length	1.2 in (31 mm)
Color	Black
Height	13.4 in (340 mm)
Width	5.5 in (140 mm)
Depth	4.3 in (110 mm)
Net Weight	13.7 lb(US) (6.2 kg)
Communication interface	Modbus Ethernet
Circuit breaker application	HACR rated

Environment

Standards	UL CSA NEMA NOM-003-SCFI-2000 IEC 60947-2
Product certifications	UL CSA NOM
IP degree of protection	Front cover IP40
Pollution degree	3 IEC 60947-1
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Storage	-58...185 °F (-50...85 °C)
Operating altitude	< 6561.68 ft (2000 m) without derating 5000 m with derating

Ordering and shipping details

Category	US10DE201116
Discount Schedule	0DE2
GTIN	3606486284230
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
-------------------------------	-----

Nbr. of units in pkg.	1
Package 1 Height	9.70 in (24.638 cm)
Package 1 Width	11.30 in (28.702 cm)
Package 1 Length	19.90 in (50.546 cm)
Package weight(Lbs)	14.590 lb(US) (6.618 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	32
Package 2 Height	44.00 in (111.760 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	491.999 lb(US) (223.167 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 796

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free Yes

Use Again


Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back No

Technical Illustration

Dimensions

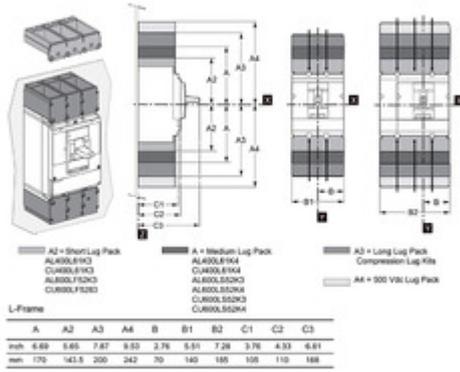

All dimensions are approximate.
 Also see CAD, technical drawings, and technical documentation.