

Product data sheet

Specifications

SQUARE D



Circuit breaker, PowerPacT L,
400A, 3 pole, 500VDC, 20kA, lugs,
thermal magnetic, 80%

LGL37040D30

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	PowerPact
Product name	PowerPact L
Device short name	L-Frame
Product or Component Type	Circuit breaker
Device Application	Distribution

Complementary

Line Rated Current	400 A
Number of Poles	3P
Control Type	Toggle
Breaking capacity code	G
Breaking capacity	65 kA 240 V AC 50/60 Hz UL 489 35 kA 480 V AC 50/60 Hz UL 489 18 kA 600 V AC 50/60 Hz UL 489 20 kA 250 V DC UL 489 20 kA 500 V DC UL 489
[Ue] rated operational voltage	500 V DC
[Ics] rated service breaking capacity	65 kA 220/240 V AC 50/60 Hz IEC 60947-2 35 kA 380/440/415 V AC 50/60 Hz IEC 60947-2 18 kA 500/525 V AC 50/60 Hz IEC 60947-2 20 kA 250 V DC IEC 60947-2 20 kA 500 V DC IEC 60947-2
[Uimp] rated impulse withstand voltage	8 kV IEC 60947-2
Trip unit technology	Thermal-magnetic
Magnetic tripping current	1000...2000 A
[Ui] rated insulation voltage	750 V IEC 60947-2
Protection technology	Current limiter
Suitability for isolation	Yes IEC 60947-2
Utilisation category	Category A
AWG gauge	2 x AWG 2/0...500 kcmil aluminium/copper
Local signalling	Switched off (OFF) 1 trip indicator green)
Mounting mode	Unit mount lug)
Mounting Support	Lug
Electrical connection	Lugs, line Lugs, load

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Terminal identifier	AL600LS52K3
Tightening torque	442.5 lbf.in (50 N.m) 0.1...0.4 in ² (70...240 mm ²) (AWG 2/0...500 kcmil) 442.5 lbf.in (50 N.m) 0.05...0.5 in ² (35...300 mm ²) (AWG 2...600 kcmil)
Power wire stripping length	1.2 in (31 mm) 2.4 in (61 mm)
Color	Black
Height	13.4 in (340 mm)
Width	5.5 in (140 mm)
Depth	4.3 in (110 mm)
Net Weight	13.7 lb(US) (6.2 kg)
Communication interface	Modbus Ethernet
Circuit breaker application	HACR rated

Environment

Standards	UL CSA NEMA NOM-003-SCFI-2000 IEC 60947-2
Product certifications	UL CSA NOM
IP degree of protection	Front cover IP40
Pollution degree	3 IEC 60947-1
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Storage	-58...185 °F (-50...85 °C)
Operating altitude	< 6561.68 ft (2000 m) without derating 5000 m with derating

Ordering and shipping details

Category	US10DE201116
Discount Schedule	0DE2
GTIN	785901942856
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	13.44 in (34.131 cm)
Package 1 Width	7.38 in (18.733 cm)
Package 1 Length	31.44 in (79.851 cm)
Package weight(Lbs)	25.501 lb(US) (11.567 kg)

Contractual warranty

Warranty

18 months



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

 Repack and remanufacture	
Take-back	No

Technical Illustration

Dimensions

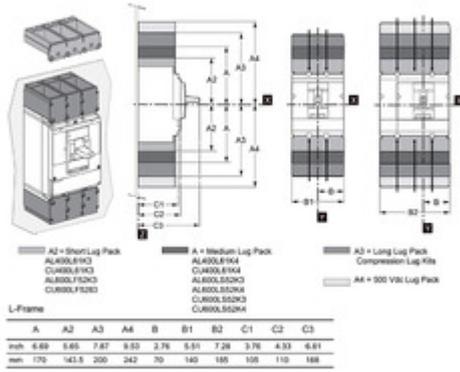

All dimensions are approximate.
 Also see CAD, technical drawings, and technical documentation.