

Product data sheet

Specifications

SQUARE D



Load center, QO, 1 phase, 8 spaces, 16 circuits, 200A convertible main breaker, NEMA3R, feedthru lugs

QO1816M200FTRB

Product availability: Stock - Normally stocked in distribution facility

Main

Marketing Trade Name	QO
Product Type	Load Center
Cover Type	Surface cover

Complementary

PoN Convertible Mains (lugs)	Main breaker
Rated Current	200 A
Number of Spaces	8
Max Short Circuit Current Rating	22 kA
Maximum Number of Single Pole Circuits	16
Maximum Number of Tandem Breakers	8
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 4...250 kcmil aluminium/copper
Ground Bar	Grounding bar (ordered separately)
Electrical Connection	Feed-thru lugs
Busbar Material	Tin plated copper: busbar
Enclosure Material	Welded galvannealed steel
Surface Finish	Baked enamel Gray
Box Number	6R
Height	29.8 in (758 mm)
Width	14.8 in (375 mm)

Environment

Enclosure Rating	NEMA 3R weatherproof enclosure
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

Ordering and shipping details

Category	US1DE3A00101
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discount Schedule	DE3A
GTIN	785901868187
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	31.30 in (79.502 cm)
Package 1 Width	4.80 in (12.192 cm)
Package 1 Length	15.50 in (39.370 cm)
Package weight(Lbs)	32.099 lb(US) (14.560 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	21
Package 2 Height	38.00 in (96.520 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	702.0009 lb(US) (318.422 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	112
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No


Technical Illustration

Dimensions

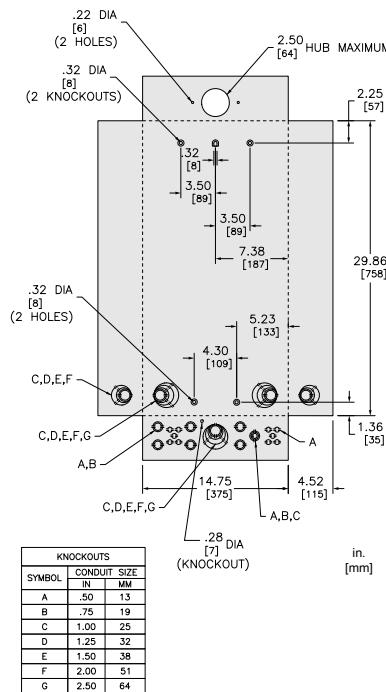

All dimensions are approximate.
Also refer to technical drawings and documentation.

Technical Illustration

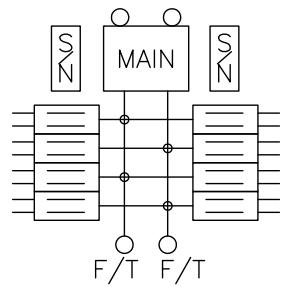Wiring diagram

QO1816M150FTRB
QO1816M200FTRB

Image of product / Alternate images

Alternative

