

VSSC4 MOV 120VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

Surge protection with individual components

• With suppressor diodes

Suppressor diodes work similarly as conventional Zener diodes. The diode becomes conductive within 10– 100ps after a certain breakdown voltage, set by the manufacturer, is exceeded. Compared to Zener diodes, suppressor diodes have a higher current-carrying capacity and a shorter reaction time.

General ordering data

Version	Surge protection for instrumentation and control, Surge protection for measurement and control, $U_P(L/N-PE) < 600\text{ V}$
Order No.	1063990000
Type	VSSC4 MOV 120VAC/DC
GTIN (EAN)	4032248829415
Qty.	5 pc(s).

VSSC4 MOV 120VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	58.5 mm	Depth (inches)	2.303 inch
Height	76 mm	Height (inches)	2.992 inch
Width	12.4 mm	Width (inches)	0.488 inch
Net weight	44.6 g		

Temperatures

Storage temperature	-40 °C...80 °C	Operating temperature	-40 °C...70 °C
Humidity	5...96 %		

Probability of failure

SIL in compliance with IEC 61508	3	MTTF	4,391 a
SFF	100 %	λ_{ges}	26
PFH in $1 \cdot 10^{-9}$ per hour	0		

Rated data UL

Certificate No. (UL)	E311081	UL certificate	UL Zertifikat
----------------------	---------	----------------	---------------

CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input current, max. I_i	500 mA
Input voltage, max. U_i	212 V	Internal capacity, max. C_i	2 nF
Internal inductance, max. L_i	0 μ H		

General data

Number of poles	1	Protection degree	IP20
Colour	black		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Capacitance	1.48 nF	Discharge current I_{max} (8/20 μ s) wire-PE	15 kA
Discharge current I_n (8/20 μ s) wire-PE	3.7 kA	Discharge current, max. (8/20 μ s)	15 kA
Max. continuous voltage, U_c (AC)	150 V	Max. continuous voltage, U_c (DC)	212 V
Number of poles	1	Overload - failure mode	Mode 1
Protection level U_p (typ.)	< 600 V	Rated current I_N	20 A
Rated voltage (AC)	120 V	Rated voltage (DC)	170 V
Requirements category acc. to IEC 61643-21	C1, C2	Standards	IEC 61643-21
Surge current-carrying capacity C1	0.5 kA 8/20 μ s 1 kV 1.2/50 μ s	Surge current-carrying capacity C2	1 kA 8/20 μ s
Voltage type	AC/DC	Volume resistance	<0.1 Ω

Further details of approvals

GOST certificate	GOST-Zertifikat
------------------	-----------------

VSSC4 MOV 120VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Connection data**

Stripping length	10 mm	Type of connection	Screw connection
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm
Clamping range, min.	0.5 mm ²	Clamping range, max.	4 mm ²
Wire cross-section, solid, min.	0.5 mm ²	Wire cross-section, solid, max.	6 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	4 mm ²
Connection cross-section, stranded, min.	0.5 mm ²	Connection cross-section, stranded, max.	4 mm ²

Electrical data

Voltage type	AC/DC
--------------	-------

Ratings IECEx/ATEX/cUL

cUL certificate	cUL Certificate
-----------------	-----------------

Classifications

ETIM 6.0	EC000943	ETIM 7.0	EC000943
ETIM 8.0	EC000943	ETIM 9.0	EC000943
ETIM 10.0	EC000943	ECLASS 9.0	27-13-08-07
ECLASS 9.1	27-13-08-07	ECLASS 10.0	27-13-08-07
ECLASS 11.0	27-13-08-07	ECLASS 12.0	27-17-90-90
ECLASS 13.0	27-17-90-90	ECLASS 14.0	27-17-90-90
ECLASS 15.0	27-17-90-90		

Tender specification sheets

Long specification	Feed-through terminal, 12.4mm wide with varistor arrester between the signal line connection and the mounting rail potential, TS 35 contact base. A signal with max. 32A can be protected here. When the terminal is fitted, a simultaneous electrically conducting contact is made between the mounting rail (earth) and the reference potential (ground) of the protection circuit in the terminal. Optical identification of the terminal based on the type of protected switching and the voltage level. The terminal can be labelled or marked.	Short specification	Feed-through terminal with a varistor as central protection between the signal line connection and the mounting rail potential, TS 35 contact base. Version: 120 V UC
--------------------	--	---------------------	---

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

VSSC4 MOV 120VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Important note**

Product information

Mode 1: State where the voltage-limiting part of the SPD was disconnected. The voltage limiting function is no longer available, but the cable is still functional.

Approvals

Approvals



Approvals MAMID

https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319227/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319238/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319252/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319261/-T1z1mm-S800/

ROHS

Conform

UL File Number Search

UL Website

Certificate No. (UL)

E311081

Downloads

Approval/Certificate/Document of Conformity

[SIL Paper](#)[EU Konformitätserklärung / EU Declaration of Conformity](#)

Engineering Data

[CAD data – STEP](#)

User Documentation

[Beipackzettel / Instruction sheet](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

VSSC4 MOV 120VAC/DC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold


Germany

www.weidmueller.com

Drawings



Similar to illustration

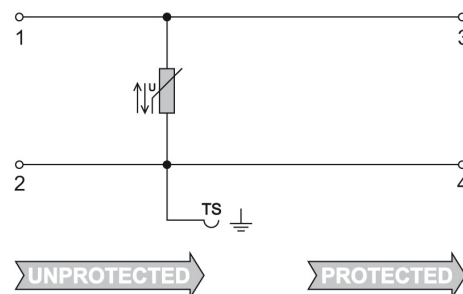

Circuit diagram

