


**Connecting elements
H16,0/22T W**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

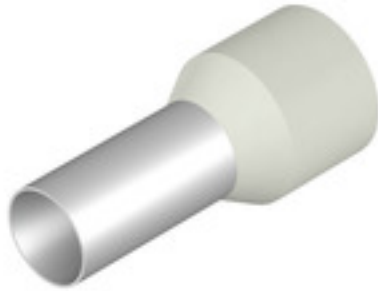

- supplied loose in poly-bag
- Weidmüller colour code
- DIN colour code
- other colour code

General ordering data

| | |
|------------|--|
| Type | H16,0/22T W |
| Order No. | 9021170000 |
| Version | Wire-end ferrule, insulated, 15 mm, 12 mm, white |
| GTIN (EAN) | 4008190151478 |
| Qty. | 100 pc(s). |
| Packaging | loose |

Data sheet

**Connecting elements
H16,0/22T W**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|--------|----------------|------------|
| Width | 22 mm | Width (inches) | 0.866 inch |
| Net weight | 0.71 g | | |

Technical data

| | |
|---------|-----------|
| Version | insulated |
|---------|-----------|

Wire-end ferrules

| | | | |
|---|--------------------|-------------------------------|---------------|
| Collar diameter (D2) | 8.8 mm | Colour code | Telemecanique |
| Conductor cross-section | 16 mm ² | Contact surface diameter (D1) | 5.8 mm |
| Contact surface length (L2) | 12 mm | L1 in mm | 22 mm |
| Metal sleeve thickness (S1) | 0.2 mm | Military designation | T 20A 025 A |
| Plastic collar thickness (S2) | 0.4 mm | Stripping length | 15 mm |
| Wire connection cross section AWG, max. | AWG 6 | | |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC000005 | ETIM 7.0 | EC000005 |
| eClass 9.0 | 27-40-02-01 | eClass 9.1 | 27-40-02-01 |
| eClass 10.0 | 27-40-02-01 | UNSPSC | 31-16-31-02 |

Approvals

Approvals



| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|--------------------|--|
| Brochure/Catalogue | CAT 6 TOOLS 15/16 EN |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| Engineering Data | STEP |

Data sheet

Connecting elements
H16,0/22T W

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Drawing

